


Electronic Ballast-Plug connection

PL11 Series

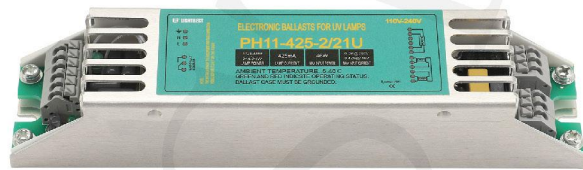

Model No.	Current & Input Voltage	Input Power (watt)	Size (mm)	Lamp Current (A)	Lamp Power (watt)	Cert.	Function	Lamp Models
PH11-425-36	0.21A@230V	41	165*38*30	0.38-0.43	21-41	CE	5V	GPH436T5, GPH843T5, TUV25WT5, TUV36T5, GPL36W
PH11--425-36N	0.21A@230V	41	165*38*30	0.38-0.43	21-41	CE	N	GPH436T5, GPH843T5, TUV25WT5, TUV36T5, GPL36W
PH11-425-36U	0.21A@230V 0.42A@120V	41	165*38*30	0.38-0.43	21-41	CE	5V	GPH436T5, GPH843T5, TUV25WT5, TUV36T5, GPL36W
PH11-425-36UN	0.21A@230V 0.42A@120V	41	165*38*30	0.38-0.43	21-41	CE	N	GPH436T5, GPH843T5, TUV25WT5, TUV36T5, GPL36W
PH11-425-2/21U	0.21A@230V 0.42A@120V	46	165*38*30	0.38-0.43	1*21-41 2*14-21	UL CE	LED N	1*lamp:GPH793T5 GPH843T5 TUV36T5 TUV25WT5 TUVPL-L36W 2*lamps:GPH436T5 GPH357T5 GPH303T5 GPH287T5 GPH212T5
PH11-350-2/24U	0.21A@230V 0.42A@120V	46	165*38*30	0.30-0.35	1*21-36 2*14-24	UL CE	LED N	1*lamp:T6 15W,T6 18W,GPL13W,GPL24W T6 30W 2*lamps:T6 15W,T6 18W,GPL13W,GPL24W
PH11-800-55U	0.25@230V 0.48A@120V	58	165*38*30	0.75~0.85	55	UL CE	5V	G55T6L/HO,G55T8L/HO

- LED — red/green, green indicator 5V — 0/5VDC signal
N — dry contact, external PLC output switching value, remote monitoring lamp normal/faulty

Electronic Ballast-lead connection

PL11/PH11 Series



Model No.	Current & Input Voltage	Input Power (watt)	Size (mm)	Lamp Current (A)	Lamp Power (watt)	Cert.	Function	Lamp Models
PH11-425-40	0.20A@230V	46	165*38*26	0.39-0.43	21-41	CE	5V	GPH436T5, GPH843T5, TUV25WT5, TUV36T5, GPL36W
PL11-425-40	0.20A@230V	46	165*38*26	0.39-0.43	21-41	CE	5V	GPH436T5, GPH843T5, TUV25WT5, TUV36T5, GPL36W
PL11-530-55	0.26A@230V	60	165*38*26	0.46~0.54	55	CE	5V	GPL55W,T8 25W

- 5V — 0/5VDC signal