

ProLine

PPE: TETHERS

- 6 models
- ISO 12401:2009
- World Sailing / OSR

SNAP HOOK

- EN 362:2004



Material

- Anodised aluminium
- Light & resistant
- Corrosion resistant

Double safety snap hook

- NEW: automatic & closing
- Wide opening : 26 mm
- V-nose: easy hooking and unhooking

Overload indicator

- Compliant OSR - World Sailing

SmartLoop

- Product can adapt to suit all needs and users.



High quality elastic webbing


- Retro-reflective
- Visible at night
- Compact and light

ProLine

Part #	Description	Length Max	Weight Kg
7036	2 ProSnap snap hooks Elastic webbing incl. overload indicator	2 m	0.330
7037	1 ProSnap hook Flat webbing incl. overload indicator	0.80 m	0.160
7038	1 ProSnap hook Elastic webbing incl. overload indicator	1.40 m	0.190
7039	3 ProSnap snap hooks Elastic + flat webbing incl. overload indicator	2 m + 1 m	0.490

+ BENEFITS

- 4 models available
- Compliance with ISO 12401:2009 and WORLD SAILING regulations (OSR)
- Overload indicator with shock absorber on all models

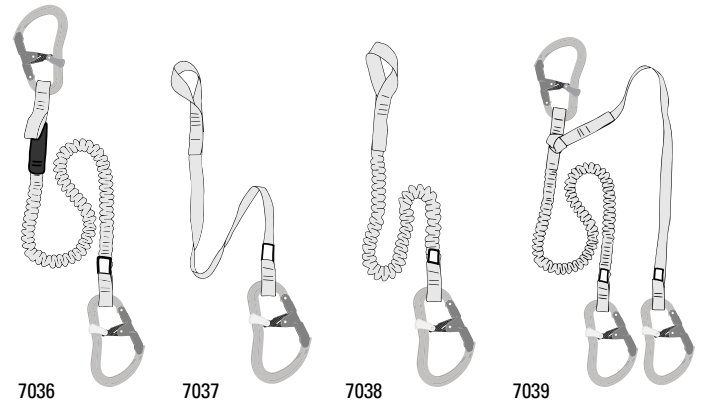


ProLine'R

Part #	Description	Length Max	Weight Kg
7066	1 ProSnap snap hook + 1 quick opening snap hook part # 2299 - elastic webbing with overload indicator	2 m	0.330
7069	2 ProSnap snap hooks + 1 quick opening snap shackle part # 2299 - elastic webbing + flat webbing - with overload indicator	2 m + 1 m	0.500

+ BENEFITS

- 2 models available
- Snap shackle on the harness can be released
- Overload indicator (OSR-WORLD SAILING) with in-built shock absorber
- CE marking

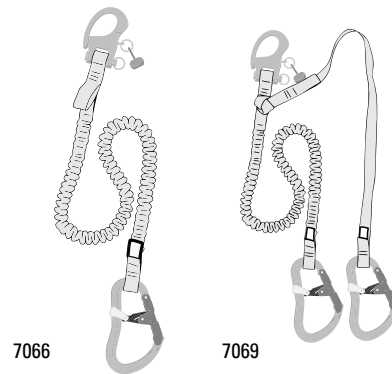

Exclusive feature: SmartLoop

Product can adapt to suit all needs and users.
SmartLoop lets you:

- turn a single webbing tether into a double webbing tether (see fig. A)
- turn a double webbing tether into two single webbing tethers (see fig. B)

