



**PRODUCTS
CATALOG**

WHO ARE WE?

With more than 30 years of experience in the world of heat shrink wrap, Ripack Supplies® draws on a unique partnership between the world leader in shrink guns and one of the European leaders in shrink wrap.

Ripack Supplies® meets fitter expectations with regard to the quality and stability of the shrink wraps. With a wide range of accessories also meeting this quality criteria, Ripack Supplies® is committed to stand at your side and help you overcome the winterizing, containment or protection challenges that you are facing.

The high standards set by Ripack Supplies® teams, associated with the technical quality of our partners, guarantees the easy, competitive implementation of our products.

RIPACK SUPPLIES® is present in various sectors such as the nautical sector, aeronautics, containment or large volume protection.

CONTENTS

SHRINK WRAP	P.4-5
SHRINK TAPES	P.6
ZIPPER DOORS	P.7
STRAPPING STRAPS TENSIONER BUCKLES	P.8 P.8 P.8 P.8
VENTS	P.9
SAFETY CUTTERS EASYKNIFE SAFEKNIFE	P.10 P.10 P.10
750 GAS BOTTLE TROLLEY	P.11
COMPLEMENTARY ITEMS	P.12

WIDE SHRINK WRAP



WIDTH	13,12 FT TO 49,21 FT 4 TO 15 METERS
-------	--

LENGTH	98,43 FT TO 164,04 FT 30 TO 50 METERS
--------	--

THICKNESS	180 TO 210 MICRONS
-----------	-----------------------

 Our offer of shrink wrap is based on a close collaboration with the users for the definition of the dimensions as well as for the technical characteristics. The quality is the central point of our approach to offer you films with an excellent resistance over time and an optimal shrinkage.

 Our wide width films are made from high quality LDPE. Bi-oriented shrinkage and great flexibility of application. UV stabilisation guaranteed for 12 months.


 Industrial LDPE shrink wrap film is 100% recyclable. Industrial film retains its quality even after repeated recycling. Today, almost 50% of recycled material is incorporated into industrial films. In the recycling process, the plastic is first converted into LDPE granules and then undergoes various recycling processes to become «agricultural film» and then «garbage bag» after a final recycling process, before finally being incinerated.



FOLDED IN 4



FOLDED IN 8

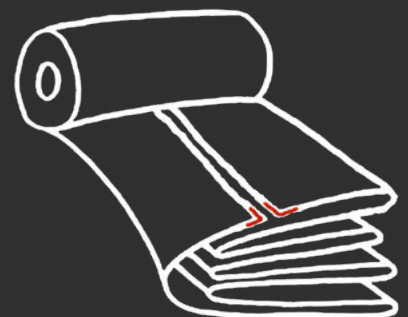


FOLDED IN 8
FOR 12 M & 15 M

WIDE SHRINK WRAP

	Width (meters)	Length (meters)	Thickness (micron)	Roll width (cm)	Ø ext (cm)	Color	Fold	Fire Class Euro	Fire Class NF	Weight Kg	Surf. M²	Qty. Roll/pa	Dimensions L x W x H cm	Weight Kg Net	Weight Kg Gross	Core Ø int/ext (mm)	Weight Core (kg)
Film4x50x180W	4	50	180	100	± 21	W = White opaque anti-UV	4 folds	D	M4	36	200	20	130x130x115	720	737	77/85	1,40
Film5x50x180W	5	50	180	125	± 21		4 folds	D	M4	44	250	20	150x120x115	880	907	77/85	1,80
Film6x50x180W	6	50	180	150	± 21		4 folds	D	M4	55	300	10	180x120x115	1100	1120	77/85	2,10
Film8x42x210W	8	42	210	100	± 29		8 folds	D	M4	70	336	12	130x130x115	840	857	77/85	1,40
Film10x33x210W	10	33	210	125	± 26		8 folds	D	M4	70	330	12	160x125x105	840	850	77/85	1,80
Film10x50x210W	10	50	210	125	± 35		8 folds	D	M4	101	500	9	160x120x120	909	920	77/85	1,80
Film12x30x210W	12	30	210	150	± 26		8 folds	D	M4	75	360	12	130x115x130	900	920	77/85	2,20
Film15x30x210W	15	30	210	188	± 26		8 folds	D	M4	93	450	9	200x105x105	830	850	77/85	2,70



HOW TO MEASURE THE FILM WIDTH?

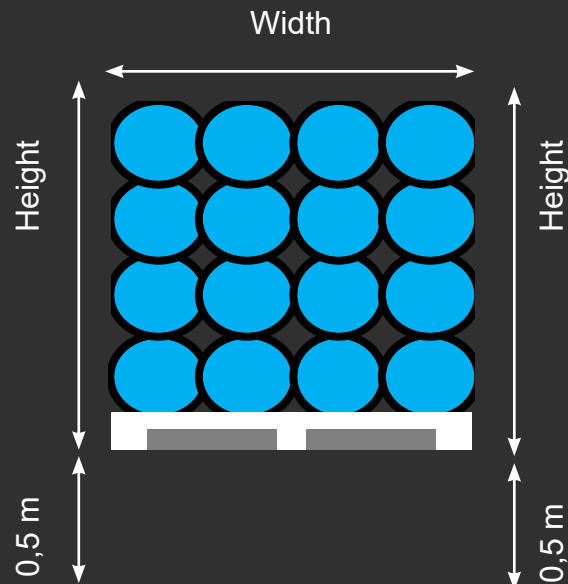


Height x 2 + Width

+ 1M (to pass the film under the load or strapping on each side)

The length of the load does not matter, the film unrolls over 30 to 50m depending on each model you choose



SHRINK TAPES

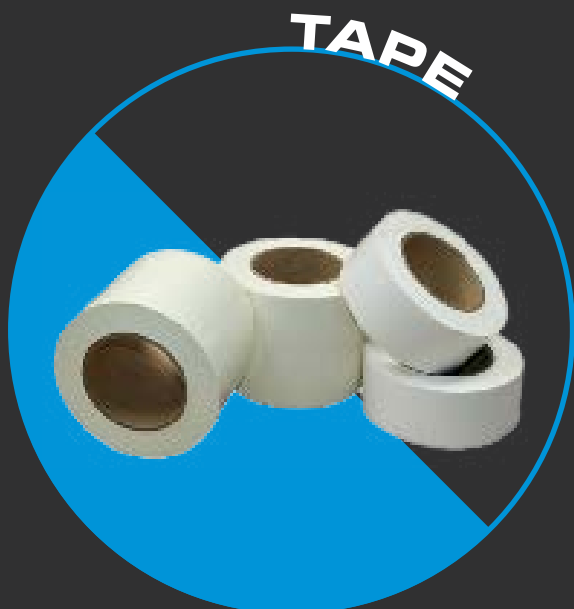

WIDTH X LENGHT	2" X 108 FT 50MM X 33 ML	4"X 108 FT 100MM X 33 ML
WIDTH X LENGHT	BOX OF 24	BOX OF 12



EFFICIENCY

Our range of shrink adhesives will allow you to maintain your film before welding and also to secure certain fragile areas of the film. The quality of its adhesive mass as well as the solidity of the support allow to work in all conditions.




ADAPTABILITY

Available in 2 widths, 50 and 100 mm. The 50 mm allows the film to be held in place in case of wind, before welding. The 100 mm will be useful for masking holes in the film, protecting the film at protruding parts or holding zipper doors.




ZIPPER DOORS

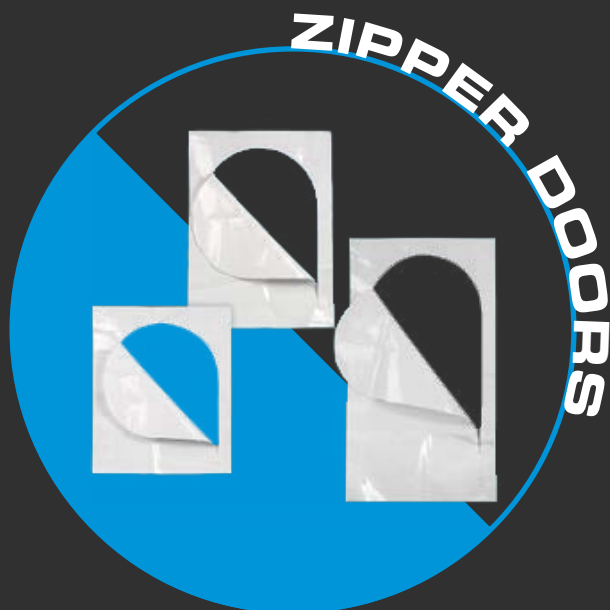

LENGHT	35,4" 90 CM	47,2" 120 CM	70,9" 180 CM
WIDTH	29,5" 75CM	35,4" 90CM	35,4" 90CM
SALES UNIT	BOX OF 6	BOX OF 12	BOX OF 6

 Access protected areas under shrink-wrap, winterized boats, confined spaces, thanks to the white zipper doors (W) available in 3 passage heights. Can be installed with top or bottom opening.

Easy to install with adhesive tape (type SH), the zipper doors are essential for long periods of storage under protection.

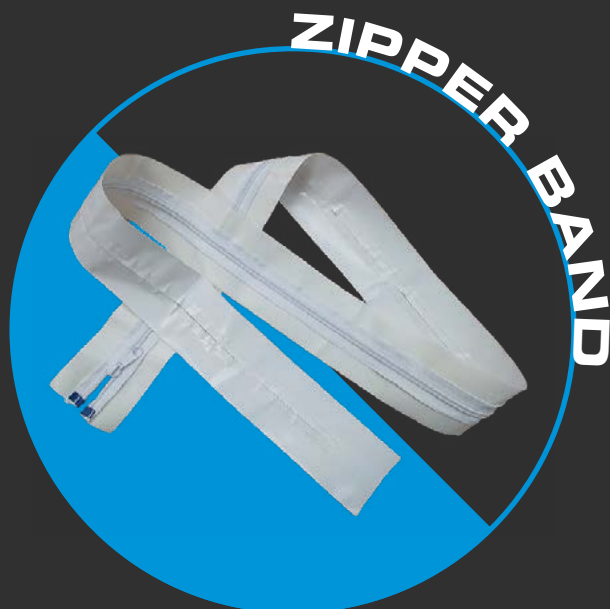

LENGHT	78,7" / 200 CM
SALES UNIT	BOX OF 6

 Ideal for creating your own access, these white zipper strips have a strong, durable adhesive and a heavy gauge zipper with a total opening length of 2.00m.


STRAPPING




WIDTH	0,5" 13MM	0,7" 19MM
LENGHT	3281 FT 1000 M	1575 FT 480 M
RESISTANCE	903,9 LB 410 KG	1807,8 LB 820 KG



To ensure a good hold of the film during transport or outdoor storage, it is essential to belt the protection with a flexible, robust and non-aggressive textile strap.

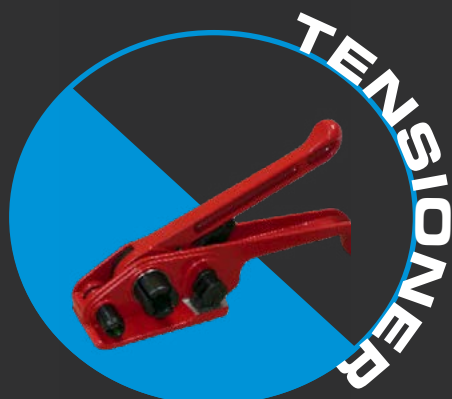

This strap tensioner is sturdy, easy to use and small, so it is very handy in tight spaces.

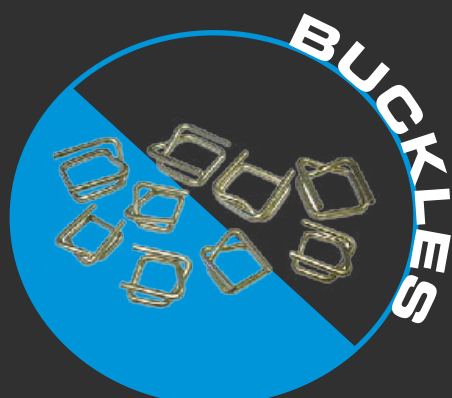


WIDTH	0,5" 13MM	0,7" 19MM
-------	--------------	--------------



Galvanized steel buckles to lock the strapping with the tensioning tool.

ADHESIVE VENTS

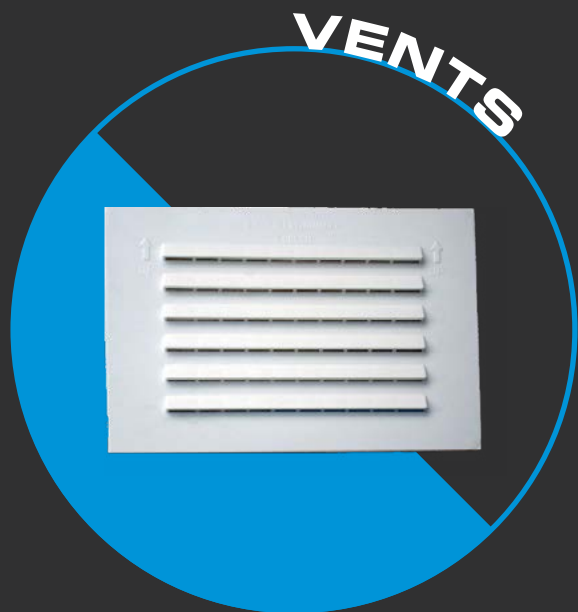

WIDTH	6" / 15 CM
-------	------------

LENGTH	4,5" / 11,5 CM
--------	----------------




PROTECTION

They are self-adhesive and very easy to install.*
Ideal for long term storage, Ripack Supplies® adhesive vents allow air to circulate under the film. This prevents odors, humidity and mildew.



SIMPLICITY

They allow the ventilation of the boat and the equipment under their shrinkwrap protection. Indispensable for long term storage.
They are self-adhesive and very easy to install : after cutting the shrink-wrapped film to size, the adhesive vents are simply stuck on.

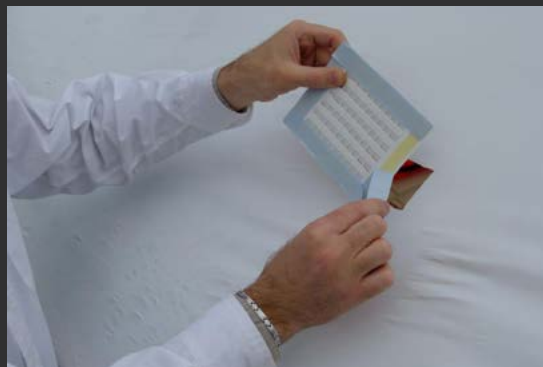

SAFETY CUT- TERS



EASYKNIFE

LENGHT	4,3" / 110 MM
WIDTH	1,3" / 33 MM
NET WEIGHT	1,13 oz / 32 G
BLADE CHANGE	10 SEC



SAFEKNIFE

LENGHT	8,15" / 207 MM
WIDTH	2,7" / 68 MM
NET WEIGHT	2,36 oz / 67 G
BLADE CHANGE	10 SEC

THESE SAFETY CUTTERS AVOID ANY RISK OF INJURY AND HAVE A REVERSIBLE AND INTERCHANGEABLE BLADE.

750 GAS BOTTLE TROLLEY



ELIGIBLE GAS
CYLINDER

26,7 LB
13 KG

OVERALL
DIMENSIONS

42"x20"x24" /
1070x500x600 MM

NET WEIGHT
WITHOUT
BOTTLE

66,14 LB /
30 KG

USE IN

PULL MODE



SIMPLICITY

The Ripack Supplies® cylinder trolley is the essential tool for moving your gas bottle easily and safely, and ensuring the longevity of your equipment.



SECURITY

The 750 trolley has been developed to support 13 kg gas bottle. It has been specially equipped with hooks to carry your shrink guns with extensions, such as the Ripack 3000+, and to roll up your gas hose for added safety. Its design offers maximum ergonomics thanks to its additional extension supports and hooks. The 750 trolley is also equipped with special wheels so you can take it easily over any terrain. The removable storage bag and guide mast provide comfortable working and protect your equipment.



COMPLEMENTARY ITEMS


Some complementary products are offered by **Ripack®**.



POWER	45 TO 80 kW
PRESSURE	1,5 - 3,5 BAR
ENERGY SOURCE	PROPANE OR NATURAL GAS (ON REQUEST)



COATING	NO-SLIP SILICON
WEIGHT	10,6 oz / 300 G
REMOVABLE	YES

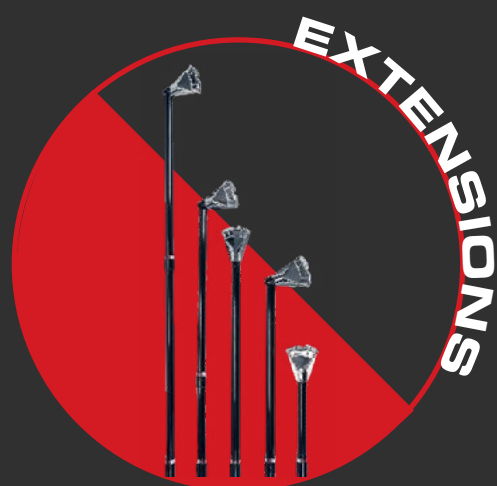

5 LENGTHS	FROM 13" TO 73,6" FROM 33 TO 187 CM
MATERIAL	ALUMINIUM
WEIGHT	FROM 10,5 TO 38,45 OZ FROM 285 TO 1090 G



MAXIMUM TOTAL LOAD	463 LB 210 KG
MAX. REEL LENGTH	5.91 FT 180CM
MAXIMUM CAPACITY	4 SPOOLS



FOLLOW US

**Find all our products and the
news of the brand on our
website:**

www.ripack-supplies.com

FOLLOW US ON SOCIAL MEDIA



Ripack Supplies



@RipackS



Ripack Supplies



GROUPE SEFMAT

RIPACKSUPPLIES®

RIPACK SUPPLIES - SEFMAT

7 RUE DE BETNOMS
33185 LE HAILLAN
FRANCE

T: +33(0) 5 56 34 35 18
INFO@RIPACK-SUPPLIES.COM
WWW.RIPACK-SUPPLIES.COM