



SMART
GYRO

FEEL THE MAGIC

THE FUTURE OF MARINE STABILIZATION

Elevating onboard comfort with advanced gyro stabilizers





Smartgyro is a gyro stabilization technology company with a mission to elevate the entire boating experience through its comprehensive range of advanced gyro stabilizers.

Founded in 2014 and based in La Spezia (Italy), Smartgyro is backed by strategic partner YANMAR and its companies, including VETUS, Maxwell and Flexofold.



HOW DOES IT WORK?

- ① Boat tilt
- ② Precession angle
- ③ Anti-roll torque
- ④ Bow



HERE IS THE KEY CONCEPT

When the boat rolls, it forces the gyroscope to change its orientation, resulting in a precession motion that generates a torque opposing this change of orientation.



WHAT MAKES SMARTGYRO SPECIAL?

We believe the ultimate luxury is uninterrupted time on the water. That's why Smartgyro is designed to minimise not only unwanted movement, but also downtime during maintenance.

EXISTING BOATS

The base frame can be broken down into four parts to allow for installation through narrow access hatches, making refitting easier and more cost-efficient.

NEW BOATS

The unit's compact dimension allows boat builders to easily integrate Smartgyro into vessel design, including taking advantage of empty hull space.



MODULAR DESIGN

For easy assembly, servicing and maintenance inside the boat, reducing the need for downtime or expensive haul outs



LIQUID COOLING

Removes heat generated by the motor, bearings, inverter and hydraulic manifold



VACUUM FLYWHEEL ENCLOSURE

The built-in pump automatically restores the vacuum, ensuring top performance at all times



GYRO CONTROL MODULE

Monitors and processes boat behaviour data in real time



DRIVING PERFORMANCE

Stops the gyro's counteracting forces during quick turns for a smoother ride


CONTROL YOUR SMARTGYRO

Effortlessly navigate Smartgyro's features with intuitive controls

Boaters can easily manage Smartgyro's key functions through an intuitive graphic user interface. Each Smartgyro unit comes equipped with a 5-inch touchscreen display or can seamlessly connect to multifunctional displays (MFDs).



EXTENDED WARRANTY

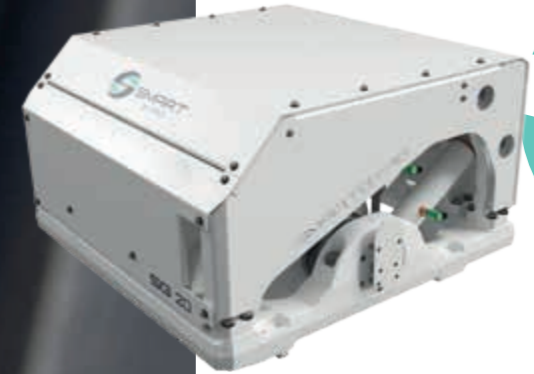

From installation to maintenance and beyond, we are committed to keeping our customers on the water. Smartgyro recreational units come with a unique three year/2,000 hours warranty for unrivalled peace of mind.

GLOBAL NETWORK

Smartgyro has a worldwide distribution network. To find a dealer near you, please go to the website:

www.smartgyro.com/find-dealer



BACKED BY A GLOBAL LEADER

Smartgyro is part of YANMAR.

YANMAR is a privately-held, multinational company with headquarters in Osaka, Japan.



SPECIFICATIONS



SG 20



SG 40



SG 60



SG 80



SG 120



SG 150

Target boat	45 - 55' or up to 25 tons
Maximum Rated speed	9.500 RPM
Angular momentum at max. rated speed	5.900 Nms
Max. Anti-rolling torque at max. rated speed	19.000 Nm
"Spool-up" time to max. rated speed	55 minutes
"Spool-up" time to stabilization	35 minutes (65% of rated speed)
Input voltage (AC)	115V nominal, 50/60 Hz, single phase 220V nominal, 50/60 Hz, single phase
Control DC power input	12 Vdc
Max. "Spool-up" AC power (*)	3.5 kW
Operating AC power (*) (**)	1.5 - 2.5 kW
Control DC power ("spool-up" and operating)	150 W (including display)
Sea water supply	15 (min) - 30 (max) LPM [4 (min) - 8 (max) GPM]
Operating temperature	0 - 55 °C [32 - 131 °F]
Envelope dimensions	0.86 x 0.77 x 0.65 m [29.9 x 30.3 x 25.6 in]
Weight	495 kg [1091 lbs]
Noise output	70 - 72 dBC @ 1 meter

Target boat	50 - 60' or up to 40 tons
Maximum Rated speed	7.500 RPM
Angular momentum at max. rated speed	9.100 Nms
Max. Anti-rolling torque at max. rated speed	15.500 Nm
"Spool-up" time to max. rated speed	55 minutes
"Spool-up" time to stabilization	25 minutes (65% of rated speed)
Input voltage (AC)	220V nominal, 50/60 Hz, single phase
Control DC power input	24 Vdc
Max. "Spool-up" AC power (*)	4.0 kW
Operating AC power (*) (**)	1.5 - 2.5 kW
Control DC power ("spool-up" and operating)	150 W (including display)
Sea water supply	15 (min) - 30 (max) LPM [4 (min) - 8 (max) GPM]
Operating temperature	0 - 60 °C [32 - 140 °F]
Envelope dimensions	1.08 x 0.93 x 0.72 m [42.4 x 36.5 x 28.4 in]
Weight	650 kg [1430 lbs]
Noise output	68 - 70 dBC @ 1 meter

Target boat	55 - 65' or up to 50 tons
Maximum Rated speed	5.500 RPM
Angular momentum at max. rated speed	12.500 Nms
Max. Anti-rolling torque at max. rated speed	34.300 Nm
"Spool-up" time to max. rated speed	45 minutes
"Spool-up" time to stabilization	27 minutes (65% of rated speed)
Input voltage (AC)	220V nominal, 50/60 Hz, single phase
Control DC power input	24 Vdc
Max. "Spool-up" AC power (*)	4.5 kW
Operating AC power (*) (**)	2.0 - 3.3 kW
Control DC power ("spool-up" and operating)	150 W (including display)
Sea water supply	15 (min) - 30 (max) LPM [4 (min) - 8 (max) GPM]
Operating temperature	0 - 60 °C [32 - 140 °F]
Envelope dimensions	1.08 x 1.11 x 0.87 m [42.4 x 43.7 x 34.3 in]
Weight	910 kg [2006 lbs]
Noise output	68 - 70 dBC @ 1 meter

Target boat	60 - 70' or up to 60 tons
Maximum Rated speed	5.500 RPM
Angular momentum at max. rated speed	15.400 Nms
Max. Anti-rolling torque at max. rated speed	42.300 Nm
"Spool-up" time to max. rated speed	50 minutes
"Spool-up" time to stabilization	27 minutes (65% of rated speed)
Input voltage (AC)	220V nominal, 50/60 Hz, single phase
Control DC power input	24 Vdc
Max. "Spool-up" AC power (*)	4.9 kW
Operating AC power (*) (**)	2.0 - 3.5 kW
Control DC power ("spool-up" and operating)	150 W (including display)
Sea water supply	15 (min) - 30 (max) LPM [4 (min) - 8 (max) GPM]
Operating temperature	0 - 60 °C [32 - 140 °F]
Envelope dimensions	1.08 x 1.11 x 0.87 m [42.4 x 43.7 x 34.3 in]
Weight	980 kg [2160 lbs]
Noise output	68 - 70 dBC @ 1 meter

Target boat	70 - 85' or up to 75 tons
Maximum Rated speed	5.000 RPM
Angular momentum at max. rated speed	28.000 Nms
Max. Anti-rolling torque at max. rated speed	68.200 Nm
"Spool-up" time to max. rated speed	80 minutes
"Spool-up" time to stabilization	55 minutes (65% of rated speed)
Input voltage (AC)	380V nominal, 50/60 Hz, three phase
Control DC power input	24 Vdc
Max. "Spool-up" AC power (*)	6.0 kW
Operating AC power (*) (**)	3.0 - 5.0 kW
Control DC power ("spool-up" and operating)	250 W (including display)
Sea water supply	20 (min) - 30 (max) LPM [5.5 (min) - 8 (max) GPM]
Operating temperature	0 - 60 °C [32 - 140 °F]
Envelope dimensions	1.36 x 1.41 x 1.02 m [53.5 x 55.5 x 40.1 in]
Weight	1770 kg [3902 lbs]
Noise output	72 - 74 dBC @ 1 meter

Target boat	80 - 95' or up to 100 tons
Maximum Rated speed	5.000 RPM
Angular momentum at max. rated speed	37.000 Nms
Max. Anti-rolling torque at max. rated speed	90.100 Nm
"Spool-up" time to max. rated speed	80 minutes
"Spool-up" time to stabilization	55 minutes (65% of rated speed)
Input voltage (AC)	380V nominal, 50/60 Hz, three phase
Control DC power input	24 Vdc
Max. "Spool-up" AC power (*)	6.8 kW
Operating AC power (*) (**)	3.0 - 5.0 kW
Control DC power ("spool-up" and operating)	250 W (including display)
Sea water supply	35 (min) - 55 (max) LPM [9 (min) - 15 (max) GPM]
Operating temperature	0 - 60 °C [32 - 140 °F]
Envelope dimensions	1.36 x 1.41 x 1.02 m [53.5 x 55.5 x 40.1 in]
Weight	1960 kg [4321 lbs]
Noise output	72 - 74 dBC @ 1 meter

(*) Sea water pump excluded
(**) Sea state dependent



VISIT

smartgyro.com



Smartgyro s.r.l.

Via Privata O.T.O. 11 | 1936 La Spezia | ITALY

© 2024 Smartgyro.s.r.l.

All data subject to change without notice. Text and illustrations are not binding.

