

LUMINOR™

BLACKCOMB

5.1 / 6.1

UV WATER TREATMENT SYSTEM

- 2 to 21 GPM
- Colour screen controller
- Lightlock™ technology for protected lamp replacement sales

If you are looking for UV water treatment for your home, LUMINOR has the solution in the BLACKCOMB series of residential UV systems.

BLACKCOMB provides UV water treatment for your home with the inclusion of a true 254nm Teflon® based UV sensor that continuously monitors the performance of the UV system, displaying the output via a colour screen (optional on 5.1 systems). In addition to UV output, diagnostics, system status, warnings and QR codes can also be displayed.

With the integral expandability port, the addition of a 4-20mA output or a solenoid valve is a simple plug-and-play option.

PRODUCT FEATURES

- Free floating (no cable twist), keyed-in-place, 254nm Teflon® based UV sensor measures continuously, displaying UV intensity as a % – std. on LB6, optional on LB5
- Colour screen controller with Lightlock™ for protected lamp replacement, includes QR codes, full diagnostics & warnings
- Expandability port for future upgrades and options
- Axial flow, 304 stainless steel polished reactors, designed & manufactured to ASME pressure vessel standards
- Simple lamp changes
- Reliable, industry proven, proprietary low pressure coated UV lamps with ceramic bases for durability and long life
- Constant current electronic controller in a splash proof case
- Full customization available as an option – language, home screen, phone number, QR codes, etc.

SAMPLE SCREENS



POINT-OF-USE (POU)

LB5/6-02 series, for flow rates of 8 lpm (2 gpm)

LB5/6-03 series, for flow rates of 11 lpm (3 gpm)

POINT-OF-ENTRY (POE)

LB5/6-06 series, for flow rates of 23 lpm (6 gpm)

LB5/6-10 series, for flow rates of 41 lpm (11 gpm)

LB5/6-15 series, for flow rates of 57 lpm (15 gpm)

LB5/6-20 series, for flow rates of 79 lpm (21 gpm)

MANUFACTURER'S WARRANTY

REACTORS—Ten (10) year Limited Warranty

ELECTRONICS—Three (3) year Limited Warranty

UV LAMPS—One (1) year Limited Warranty


QUARTZ SLEEVES—One (1) year Limited Warranty



See luminoruv.com for complete warranty document, including conditions and exclusions.



TYPICAL POE INSTALLATION

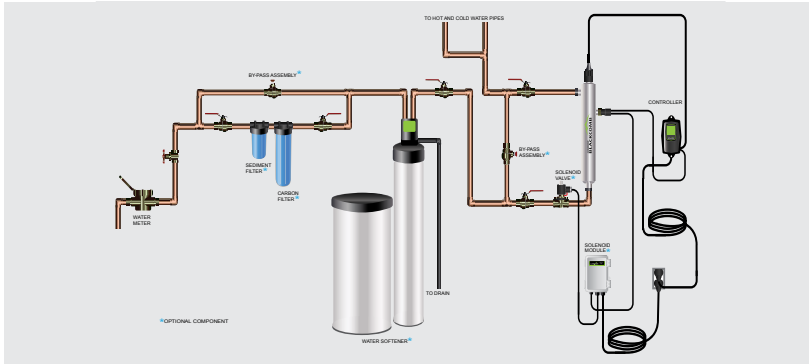

BLACKCOMB 5.1/6.1 SO - EQUIPMENT SPECIFICATIONS

BLACKCOMB (standard-output)						
MODEL	LB5-021 LB6-021	LB5-031 LB6-031	LB5-061 LB6-061	LB5-101 LB6-101	LB5-151 LB6-151	LB5-201 LB6-201
Flow Rate (30mJ/cm ² @ 95% UVT)	2 GPM	3 GPM	6 GPM	11 GPM	15 GPM	21 GPM
	7.6 lpm	11.4 lpm	22.7 lpm	41 lpm	57 lpm	79 lpm
	0.45 m ³ /hr	0.7 m ³ /hr	1.4 m ³ /hr	2.5 m ³ /hr	3.4 m ³ /hr	4.8 m ³ /hr
Flow Rate (40mJ/cm ² @ 95% UVT)	1.6 GPM	2.4 GPM	4.4 GPM	8.3 GPM	12 GPM	16 GPM
	6.1 lpm	9.1 lpm	17 lpm	31 lpm	45.4 lpm	59 lpm
	0.36 m ³ /hr	0.5 m ³ /hr	1.0 m ³ /hr	1.9 m ³ /hr	2.7 m ³ /hr	3.6 m ³ /hr
Flow Rate (16mJ/cm ² @ 95% UVT)	4 GPM	6 GPM	11 GPM	20 GPM	30 GPM	39 GPM
	15.1 lpm	23 lpm	41 lpm	77 lpm	114 lpm	150 lpm
	0.9 m ³ /hr	1.4 m ³ /hr	2.5 m ³ /hr	4.6 m ³ /hr	6.8 m ³ /hr	8.9 m ³ /hr
Port Size	½"FNPT	½"MNPT	¾"MNPT	¾"MNPT	1"MNPT	1"MNPT
Electrical	90-265V/50-60Hz, 1A Max.					
Plug Type	American, NEMA 5/15, 3 wire for all 110V systems, "1" suffix (i.e. LB5-101) European, CEE 7/7, 3 wire for all 230V systems, "2" suffix (i.e. LB5-102) British Standard, BS 1363, 3 wire for all 230V systems, "3" suffix (i.e. LB5-103) Australian/New Zealand, AS/NZ 3112, 3 wire for all 230V systems, "4" suffix (i.e. LB5-104)					
Lamp Watts	8	15	22	39	50	42
Power (Watts)	14	20	30	49	62	51
Maximum Current (amps)	1	1	1	1	1	1
Replacement Lamp	RL-210	RL-290	RL-470	RL-820	RL-999	RL-850
Replacement Sleeve	RQ-210	RQ-290	RQ-470	RQ-820	RQ-999	RQ-850
Chamber Material	Polished 304 stainless steel, A249 pressure rated tubing					
Reactor Dimensions	2.5 x 10.3" (6.4 x 26.2cm)	2.5 x 14.3" (6.4 x 36.4cm)	2.5 x 21.3" (6.4 x 54.2cm)	2.5 x 35.2" (6.4 x 89.5cm)	2.5 x 40.0" (6.4 x 101.6cm)	3.5 x 36.1" (8.9 x 91.7cm)
Controller Dimensions	17.2 x 9.2 x 10.2 cm (6.8 x 3.6 x 4")					
Operating Pressure	0.7-10.3 bar (10-150 psi)					
Operating Water Temp.	2-40° C (36 - 104°F)					
UV Monitor	YES on LB6 (optional on LB5), RS-B2.5					RS-B3.5 optional on LB5
Solenoid Output	YES (but requires optional solenoid module) (MOD-SOL)					
Dry Contacts	YES (but requires optional remote alarm module) (MOD-RAM)					
4-20mA Output	YES (but requires optional 4-20mA module) (MOD-420)					
Lamp Change Reminder	YES (both audible and visual (full colour graphic))					
Lamp Out Indicator	YES (both audible and visual (full colour graphic))					
Shipping Weight	2.9 kg (6.3 lbs)	3.6 kg (7.9 lbs)	4.4 kg (9.6 lbs)	6.0 kg (13.2 lbs)	6.5 kg (14.4 lbs)	8.2 kg (18.0 lbs)

Guaranteed OEM Lamp Replacement with Lightlock™ technology

Protect your replacement lamp revenue stream with LUMINOR's truly proprietary UV lamps with Lightlock™ technology. Maintain your lamp sales, and more importantly your lamp margin, all while protecting the integrity of the product and its performance.



OPTIONAL EQUIPMENT MODULES

UV Concierge

Available for WEB, iOS, and Android platforms providing live, dynamic feedback on all features and functions of your UV system.



SHERPA Series Water Quality Monitor

Allows for remote monitoring of all major and minor alarms that take place on the UV system. Three LED's visually display system functionality from up to 150' (46m) away.



Custom Dealer Programmer

Customize your UV controller with your own company name, logo, and contact information. Capture the lucrative replacement lamp market by creating a direct link back to your own website!



UV Sensor Module

Allows the UV intensity to be measured and displayed via the controller. The sensor plugs directly into the controller and is mounted in the sensor port on all reactors.



Solenoid Module

Used to power a remote normally closed solenoid valve (not included). Solenoid will close on lamp failure or when low UV conditions are detected by the sensor.



TRV (temperature management relief valve)

Allows for a small amount of water to be released from the UV unit to allow for cooling of the water. Used in applications of extended "no flow" conditions, or when the temperature of the treated water is of a critical nature.



Cooling Fan

To reduce water temperature inside the reactor without wasting any water. Runs independently and continuously.



4-20mA Module

Used for signal transfer to a remote device such as a data logger or computer. Order MOD-420.



Remote Alarm (Dry Contact) Module

Used for signal transfer to a remote alarm or dry contacts. Order MOD-RAM.



Ultrasonic Flow Meter

Ensure that your UV is running as efficiently and effectively as possible; enables your UV system to dim power in times of low to no flow.



EPA Establishment
#088776-CAN-001

