

Guarantees and options


Guaranteed final thickness

At Kuiper Holland we understand the extreme importance of precision in yacht building. Our Serene panels will be delivered in the exact final thickness you specify.

Unlimited customization

The Serene range as listed in this brochure can be expanded at will by choosing from a large number of customization options including:

- half-lap joints
- priming or finish lacquering
- cut-to-size
- additional HPL or veneer layers
- custom made sandwich panel

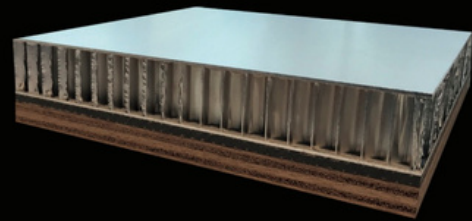


"We'll gladly go the extra mile to help you optimize your yacht."


Hans Golbach
Owner, Kuiper Holland

For our Serene Series we use
6 types of sound reduction layers




C-200
CORK
150-200 KG/m³




CR-600
CORK-RUBBER
ACM 15 650 KG/m³
MAC 015



CR-900
CORK-RUBBER
ACM 17 965 KG/m³
MAC 017



R-2400
RUBBER HEAVY
2400 KG/m³



CRR-650
CORK RECYCLED RUBBER
ACM 16 620-740 KG/m³
MAC 016



CRR-950
CORK RECYCLED RUBBER
ACM 18 900-1030 KG/m³
MAC 018

CORK WITH RECYCLED RUBBER




KUIPER
HOLLAND

Molenstraat 34, 7651 AX Tubbergen
+31 (0)546 621361
info@kuiperholland.com
www.kuiperholland.com

Superyacht Interior Panels

Kuiper Serene Soundproof Panels


KUIPER
HOLLAND

Kuiper Serene soundproof panels

Top performance


When it comes to soundproofing your yacht, Kuiper Holland will provide the high-grade panels you need to ensure reliable top performance.

Wide range

Our Kuiper Serene Series features panels in any desired weight and thickness, with a wealth of customization options. As we carry all basic materials in stock, we can ensure speedy delivery at all times.

Thoroughly tested

All Serene panels have been thoroughly tested by Dutch maritime specialist Van Capellen Consultancy. To the right we have listed our Serene range and corresponding essential test results. Complete test results per panel type (see example below) can be viewed on www.kuiperholland.com.

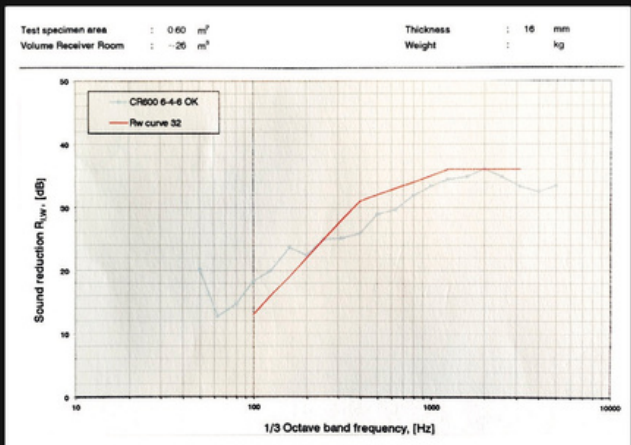

Example test result CR 600 6-4-6 Okoume



Kuiper Serene Series testing results

Product discription	Noise reduction/RW curve
Okoume plywood R-2400 6-6-6	38
Okoume plywood R-2400 8-6-8	38
Okoume plywood R-2400 10-6-10	37
Okoume plywood CR-900 8-6-8	36
Okoume plywood R-2400 4-4-4	35
Okoume plywood R-2400 6-4-6	35
Okoume plywood R-2400 8-4-8	35
Okoume plywood CRR-950 8-6-8	35
Okoume plywood CR-900 6-6-6	35
Okoume plywood CR-600 8-6-8	35
Okoume plywood CR-900 10-6-10	35
Okoume plywood CRR-950 6-6-6	34
Okoume plywood CR-900 8-4-8	34
Okoume plywood R-2400 10-4-10	34
Poplar plywood CR-900 8-6-8	34
Okoume plywood CR-900 6-4-6	33
Okoume plywood CRR-650 6-6-6	33
Okoume plywood CRR-650 8-6-8	33
Okoume plywood CR-600 8-4-8	33
Okoume plywood CR-600 10-4-10	33
Poplar plywood CR-600 8-6-8	33
Okoume plywood CR-600 6-4-6	32
Poplar plywood CR-900 6-4-6	32
Okoume plywood CRR-950 4-4-4	31
Okoume plywood CR-900 4-4-4	31
Okoume plywood CRR-650 4-4-4	30
Okoume plywood CR-600 4-4-4	30
Okoume plywood C-200 4-4-4	27
Okoume plywood C-200 8-6-8	26

Weight/m ²	Thickness/mm
20,00	18
22,00	22
24,00	26
13,79	22
12,00	12
14,00	16
16,00	20
14,17	22
11,79	18
11,90	22
15,79	26
12,50	18
11,86	20
18,00	24
12,51	22
9,86	16
11,53	18
12,80	22
10,60	20
12,60	24
10,62	22
8,60	16
8,90	16
8,30	12
7,86	12
7,40	12
6,60	12
4,70	12
9,05	22