


FILTER PRL3 PUROLINE GB-PP-HF

PRL3.00U80.001-1



A three-stage UPS-type filter based on three Puroline cartridges: GB, PP and HF. Combination of activated carbon, a mechanical filtration and ultrafiltration membrane, is a compact solution for the removal of chlorine and its derivatives as well as thorough removal of mechanical impurities from water.

Functions: Removes, chlorine and its derivatives. Reduces the level of mechanical impurities and selected chemical impurities of industrial and organic origin.

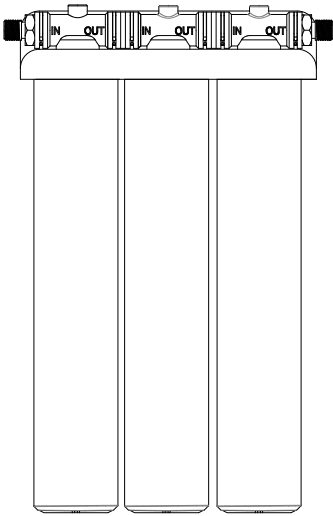

TECHNICAL SPECIFICATIONS

PARAMETER		UNIT	VALUE
Height		cm	54
Width		cm	35
Depth		cm	12
Filtration medium		-	coconut activated carbon
		-	PP spun
		-	ultrafiltration membrane
Connection*		inch	1/2, 3/4, 3/8
Capacity		L / months	22000 / 12
Maximum flow		L/min	5
Filtration accuracy		µm	0,1
Inlet water parameters	Temperature range	°C	2 – 38 °C
	Pressure range	bar	1 - 7
	pH range	-	2 - 11
	Maximum TDS	ppm	n/a
	Maximum chlorine concentration	ppm	0,3
Net weight		kg	5,0
Gross weight		kg	5,2

