

# WATER BLASTING SOLUTIONS TO FIT EVERY SIZE JOB

ALL HOGS COME WITH A SET OF HOG TOOLS TO GIVE YOU VALUE BEYOND THE TRUCK

**STRIPE  
HOG  
SH24**



## STRIPE HOG - SH24

Operating Pressure: 40,000 psi (2,750 bar)

Flow Rate: 24 gpm (91 lpm)

Fresh Water Capacity: 4,200 gallons (15,898 liters)

Debris Tank Capacity: 1,800 gallons (6,813 liters)

*PTO Engine-Driven*

**STRIPE  
HOG  
SK3000**



## STRIPE HOG - SK3000

Operating Pressure: 40,000 psi (2,750 bar)

Flow Rate: 7.8 gpm (27.6 lpm)

Fresh Water Capacity: 1,050 gallons (3,975 liters)

Waste Tank Capacity: 1,200 gallons (4,542 liters)

Comes with HT2000 Tractor

HT1000SR Ground HOG Compatible

**STRIPE  
HOG  
SH15**



## STRIPE HOG - SH15

Operating Pressure: 40,000 psi (2,750 bar)

Flow Rate: 15 gpm (58 lpm)

Fresh Water Capacity: 3,150 gallons (11,924 liters)

Debris Tank Capacity: 1,800 gallons (6,813 liters)

*PTO Engine-Driven*

**STRIPE  
HOG  
SH8000**



## STRIPE HOG - SH8000

Operating Pressure: 40,000 psi (2,750 bar)

Flow Rate: 12 gpm (45.4 lpm)

Fresh Water Capacity: 3,150 gallons (11,924 liters)

Debris Tank Capacity: 1,800 gallons (6,813 liters)

*Also Available as the SK8000 (AUX Engine-Driven)*

**STRIPE  
HOG  
SH7500**



## STRIPE HOG - SH7500

Operating Pressure: 40,000 psi (2,750 bar)

Flow Rate: 9 gpm (34 lpm)

Fresh Water Capacity: 1,200 gallons (4,542 liters)

Debris Tank Capacity: 750 gallons (2,839 liters)

*Also Available as the SK7500 (AUX Engine-Driven)*

**STRIPE  
HOG  
SK2000**



## STRIPE HOG - SK2000

Operating Pressure: 40,000 psi (2,750 bar)

Flow Rate: 5.6 gpm (21.2 lpm)

Fresh Water Capacity: 600 gallons (2,271 liters)

Debris Tank Capacity: 750 gallons (2,839)

*Trailer-mounted model available*

*HOG Tusk Compatible with 7.6 gpm (28.7 lpm) pump*

**STRIPE  
HOG  
SK5.2**



## STRIPE HOG SK5.2

Operating Pressure: 40,000 psi (2,750 bar)

Flow Rate: 5.2 gpm (19.6 lpm)

Fresh Water Capacity: 900 gallons (3,406 liters)

Debris Tank Capacity: 700 gallons (2,650 liters)

*Trailer, Chassis, & Skid-mounted models available*

**SURFACE  
HOG**



## SURFACE HOG

Operating Pressure: 7,250 psi (499 bar)

Flow Rate: 7.9 gpm (29.9 lpm)

Fresh Water Capacity: 610 gallons (2,308 liters)

Debris Tank Capacity: 132 gallons (499 liters)

*For cleaning hard and porous surfaces*

## TOOLING & ATTACHMENTS



### HOG TUSK

Combining PCD grinding efficiency with water blasting effectiveness, the HOG Tusk is the quickest way to remove ultra thick thermoplastic lines.

Using Smart Cylinder technology for super accurate control, the HOG Tusk uses half the water to do twice the work!

- Available in 9" (22.8 cm) and 13" (33 cm) options
- Can only be added to Stripe HOGs built Tusk Ready



### MULTI-BAR HEADS

HOG has a variety of Zero Overlap multi-bar heads that can be attached to a wide range of Stripe HOG models.

Great for Rubber Removal, Retexturing or Line Removal and Cleaning.

Available in:

- 48" (121.9 cm) Triple - (3) 16" (40.64 cm) bars
- 36" (91.44 cm) Triple - (3) 12" (30.48 cm) bars
- 24" (60.96 cm) Double - (2) 12" (30.48 cm) bars



### TOOLING SOLUTIONS

HOG offers tools that can attach to any of our Stripe HOGs. From a lightweight walk-behind tool to a zero-turn-radius tractor, our tools can use operate up to 300' (91.44m) away from the Stripe HOG (with the purchase of additional hoses) giving you versatile options for smaller, tighter spaces or smaller jobs such as crosswalks and turn arrows.

## KEY FEATURES & COMPONENTS



### UHP PUMP

Our Jetstream pumps offer unmatched power and reliability and are easy to access for on-the-job service and routine maintenance.

Jetstream pumps have powered Stripe HOGs for over 20 years!

Our pumps range from 5.2 GPM (19 LPM) up to 26 GPM (98.5 LPM)



### DEBRIS TANKS

The HOG Smart Tank offers


- Air-Actuated door seal to ensure no loss of vacuum.
- Our patented dewatering system filters recovered water through the debris bag and offloads it to keep you working and provides nearly dry debris for dumping.
- Optional Scissor-Lift



### WATER TANKS

Our polyethylene water tanks are lightweight, modular, and act as natural ballasts.

- Option Bladder Bags with pump to recover water when offloading isn't convenient
- Sight Glass for easy level detection
- Easily Replaceable if damaged

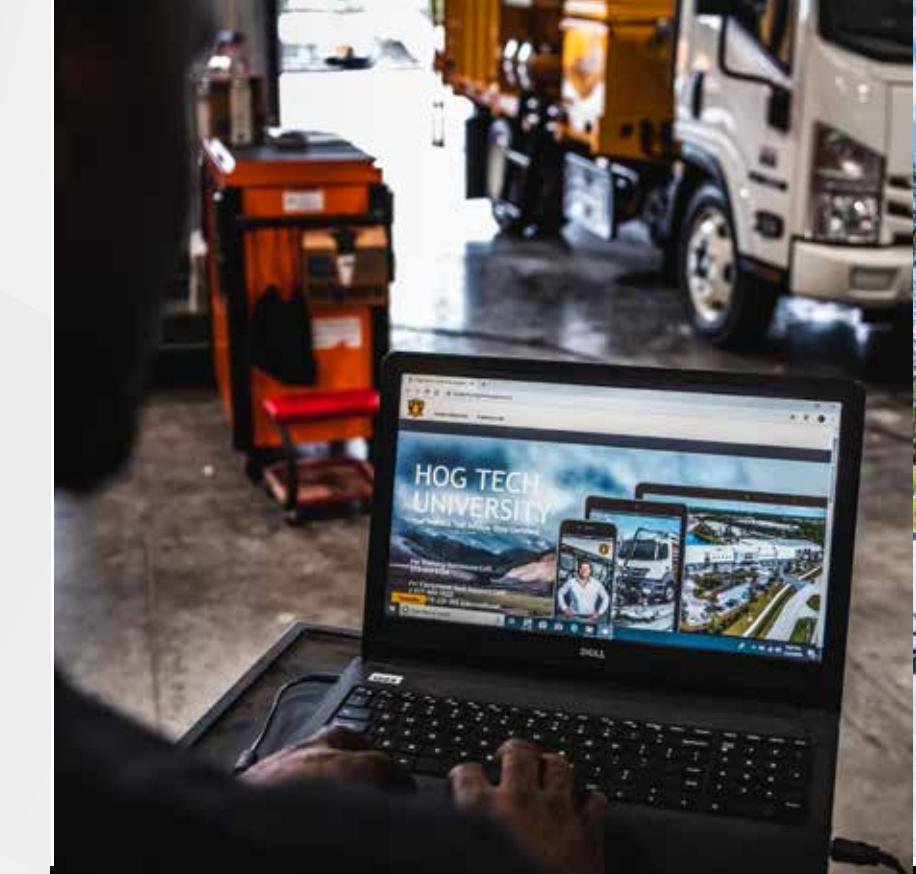

## TOTAL PAVEMENT MAINTENANCE SOLUTIONS

- MARKING REMOVAL
- PAINT CLEANING & REJUVENATION
- SURFACE RETEXTURING & CLEANING
- SPILL CLEANUP
- RUBBER REMOVAL



[www.TheHog.com](http://www.TheHog.com)



USA Office  
3920 SE Commerce Ave.  
Stuart, FL 34997  
1-772-214-1714

European Office  
Bilanska 4085  
767 01 Kromeriz, Czech Republic  
+420 573 903 031

START LEARNING TODAY