
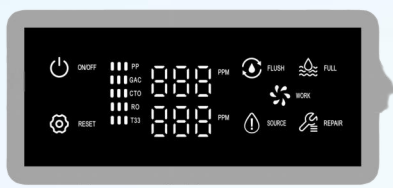


Reverse Osmosis Water Purifier

TOP-HS1

INTOPAQUA

Where Purity Flows

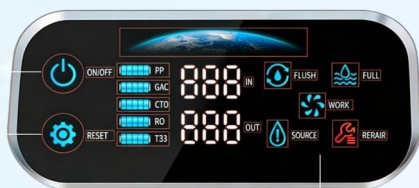

► Smart Control System

Fully automatic operation (filtration / stop / flushing)

► Real-time TDS Display

Monitors feed water and purified water quality

► Auto Flushing Function

Extends RO membrane lifespan

► Safety Protection

Water shortage protection / full tank auto-stop / leakage alarm (optional)

► Filter Replacement Reminder

Intelligent filter life monitoring

► Low Noise Operation

Stable, low vibration and quiet performance



75G - 600G
Large flow



Tank Inside



Instant filtration
and drinking



Mini space



Reminder
replacement



Quick
fitting filter

Specification

Filtration Technology & Stages	Reverse Osmosis (0.0001μm), 5-7 stages (optional)
Rated Capacity	75 GPD (≈ 280L/day) / 100 GPD (≈ 370L/day)
Filter Configuration	PP Sediment + Activated Carbon + Carbon Block + RO Membrane + Post Carbon (+ Mineral / Functional optional)
Removal Rate	≥ 96% (heavy metals, bacteria, viruses, etc.)
Wastewater Ratio	Approx. 2:1
Pressure Tank Capacity	3.2G (≈ 6- 7L, built-in)
Feed Water Source	Municipal tap water
Inlet Pressure	0.15 - 0.4 MPa
Working Temperature	2 - 40°C
Power Input	AC 100 - 240V / 50 - 60Hz
Power Output	DC 24V / 1.7A
Rated Power	75 GPD ≈ 25W / 100 GPD ≈ 40W
Product Dimensions	416 × 255 × 434 mm
Net / Gross Weight	12 kg / 15 kg