


2304 Series / 系列



Features / 产品特点

- Mini body with modular structure
 - High flow with tankless design
 - Integrated water manifold module with no water leakage
 - Composite filter cartridge for easy replacement
 - High-precision filtration with long-lasting water-saving RO membrane
 - Long service life of filter cartridge with life reminder
- 模块化结构 迷你机身
 - 大流量无桶设计 新鲜畅饮
 - 集成水路设计 无漏水隐患
 - 复合滤芯 便捷换芯
 - 滤芯寿命提醒 使用安心
 - 长效节水RO膜 高精度过滤

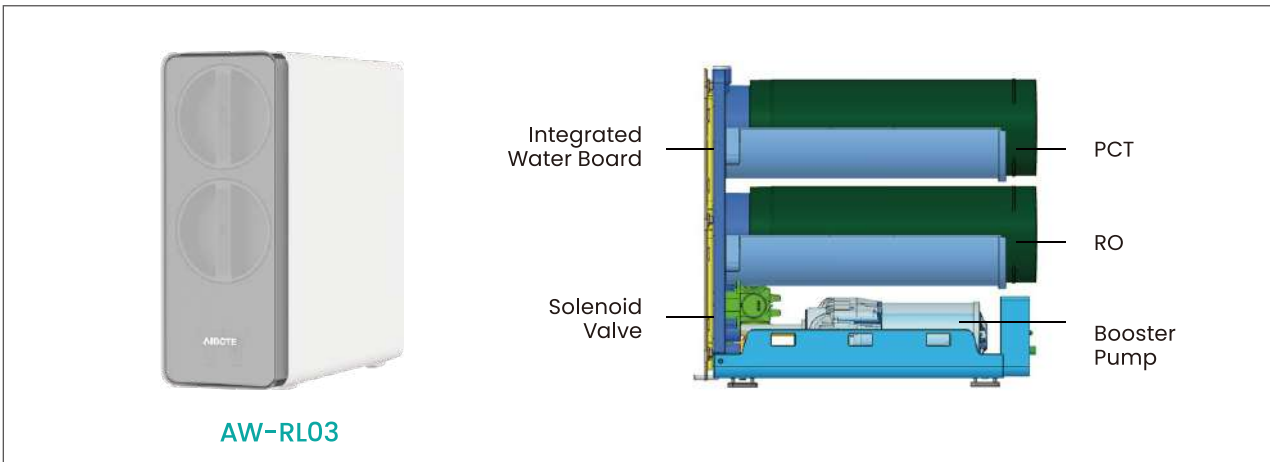

AW-RL01




AW-RL02



AW-RL04

Specification / 产品参数			
RO Flow Available / 通量	400GPD	500GPD	600GPD
Power / 功率	65W	65W	80W
Voltage / 电压	24V	24V	24V
Purified Water Flow Rate / 纯水流速	1.04L/min	1.3L/min	1.56L/min
RO Permeate: drain / 净废比	2:1	Input Water Pressure / 进水压力	0.1-0.4Mpa
First Filter / Service Life / 第一级滤芯	PCT (PP + Carbon + Post Carbon) 12 months	Inlet Water Temperature / 进水温度	5~38℃
Second Filter / Service Life / 第二级滤芯	RO (Reverse Osmosis) / 24 months	Ambient Temperature / 环境温度	4~40℃
Product Size / 产品尺寸	352*125*328 (mm)	Carton Size / 包装尺寸	410*200*480 (mm)

2516 Series / 系列

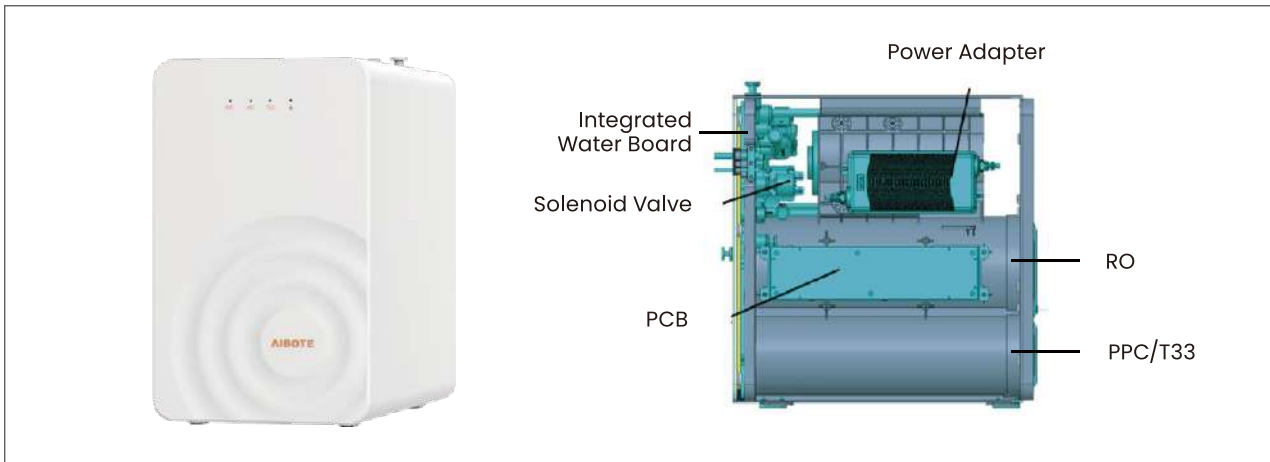

Features / 产品特点

- Minimalist design, elegant appearance, cost efficiency
 - Clear structural layout with separated water and electrical circuits for enhanced safety
 - Slim body, high flow rate, balancing spatial adaptability and water efficiency
 - Dedicated purified water channel paired with a pipe-line water outlet to meet diverse usage needs
- 极简设计, 优雅外观, 极具性价比
 - 结构布局清晰, 水电分离设计, 安全性更高
 - 机身纤薄, 出水流速快, 完美平衡了空间适应性与出水效率
 - 设有独立净水通道, 并配备管路出水口, 满足多样化的用水需求




AW-RX01



AW-RX02

Specification / 产品参数				
RO Flow Available / 通量	400GPD	600GPD	800GPD	1000GPD
Power / 功率	65W	80W	110W	130W
Voltage / 电压	24V	24V	24V	24V
Purified Water Flow Rate / 纯水流速	1.04L/min	1.56L/min	2.08L/min	2.60L/min
RO Permeate: drain / 净废比	2:1		Input Water Pressure / 进水压力	0.1-0.4Mpa
First Filter / Service Life / 第一级滤芯	PPC (PP+Carbon) / 12 months		Inlet Water Temperature / 进水温度	5~38℃
Second Filter / Service Life / 第二级滤芯	RO (Reverse Osmosis) / 24 months		Ambient Temperature / 环境温度	4~40℃
Third Filter / Service Life / 第三级滤芯	T33 (Post Carbon) / 12 months		Product Size / 产品尺寸	345*200*325 (mm)
Carton Size / 包装尺寸	410*270*430 (mm)			
Customizable heating machine model / 可定制加热机型				

2204 Series / 系列

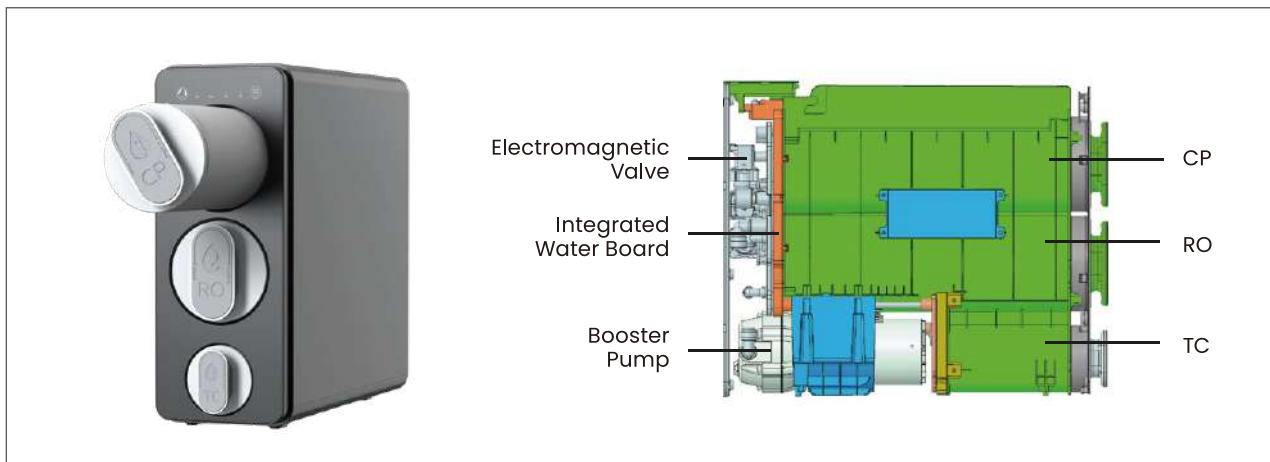

Features / 产品特点

- High flow with tankless design
- Slim body with modular structure
- Integrated water manifold module with no water leakage
- High-precision filtration with long-lasting water-saving RO membrane
- Composite three-stages filter, post activated carbon for better taste
- Zero stale water technology for the first cup of fresh water
- 大流量无桶设计 新鲜畅饮
- 模块化结构 机身纤薄
- 集成水路设计 无漏水隐患
- 长效节水RO膜 高精度过滤
- 复合三芯 后置活性炭口感优
- 全时鲜零陈水 第一杯水也新鲜




AW-RK01



AW-RK02

Specification / 产品参数				
RO Flow Available / 通量	600GPD	800GPD	1000GPD	1200GPD
Power / 功率	80W	110W	130W	150W
Voltage / 电压	24V	24V	24V	36V
Purified Water Flow Rate / 纯水流速	1.56L/min	2.08L/min	2.60L/min	3.0L/min
RO Permeate: drain / 净废比	2:1		Input Water Pressure / 进水压力	0.1-0.4Mpa
First Filter / Service Life / 第一级滤芯	CP (PP+Carbon) / 12 months		Inlet Water Temperature / 进水温度	5~38°C
Second Filter / Service Life / 第二级滤芯	RO (Reverse Osmosis) / 24 months		Ambient Temperature / 环境温度	4~40°C
Third Filter / Service Life / 第三级滤芯	TC (Post Carbon) / 12 months		Product Size / 产品尺寸	460*150*377 (mm)
Carton Size / 包装尺寸	465*565*370 (mm)			

1721 Series / 系列

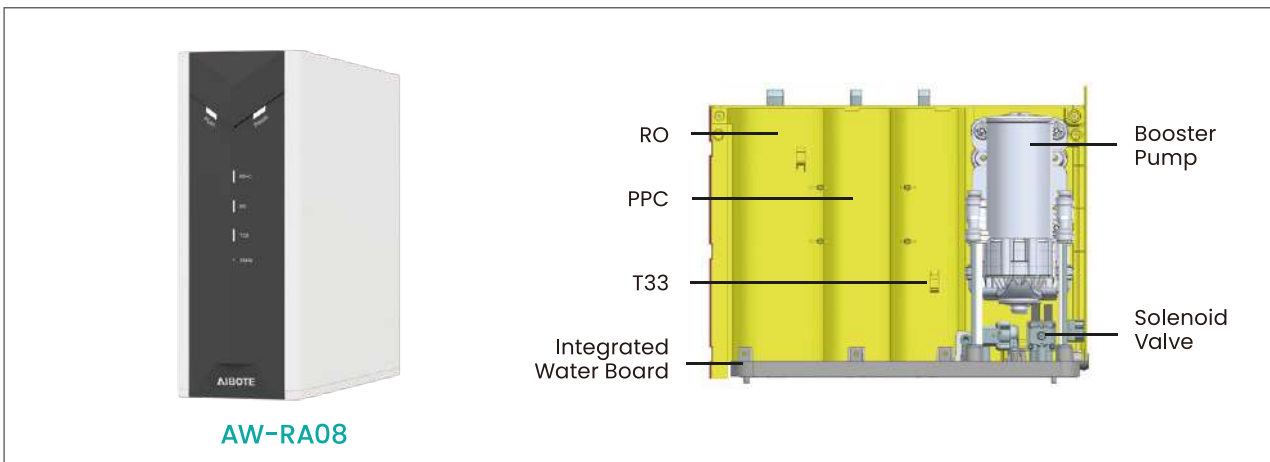

Features / 产品特点

- High flow with tankless design
- Slim body with modular structure
- Integrated water manifold module with no water leakage
- Separated post carbon filter , three-stages composite top-draw filters cartridge for easy replacement
- High-precision filtration with long-lasting water-saving RO membrane
- Long service life of filter cartridge with life reminder
- 模块化结构 机身纤薄
- 大流量无桶设计 新鲜畅饮
- 集成水路设计 无漏水隐患
- 长效节水RO膜 高精度过滤
- 复合上抽式滤芯 便捷换芯
- 独立后置炭滤芯
- 滤芯寿命和水质监测 使用安心



AW-RA04




AW-RA05



AW-RA06

Specification / 产品参数				
RO Flow Available / 通量	75GPD	400GPD	500GPD	600GPD
Power / 功率	36W	65W	65W	80W
Voltage / 电压	24V	24V	24V	24V
Purified Water Flow Rate / 纯水流速	0.2L/min	1.04L/min	1.3L/min	1.56L/min
Pressure Tank / 压力桶	3.2G	—	—	—
RO Permeate: drain / 净废比	2:1		Input Water Pressure / 进水压力	0.1-0.4Mpa
First Filter / Service Life / 第一级滤芯	PPC (PP+Carbon) / 12 months		Inlet Water Temperature / 进水温度	5~38°C
Second Filter / Service Life / 第二级滤芯	RO (Reverse Osmosis) / 24 months		Ambient Temperature / 环境温度	4~40°C
Third Filter / Service Life / 第三级滤芯	T33 (Post Carbon) / 12 months		Product Size / 产品尺寸	443*132*356 (mm)
Carton Size / 包装尺寸	675*192*465 (mm) RA07: 755*265*496 (mm)			

1915 Series / 系列

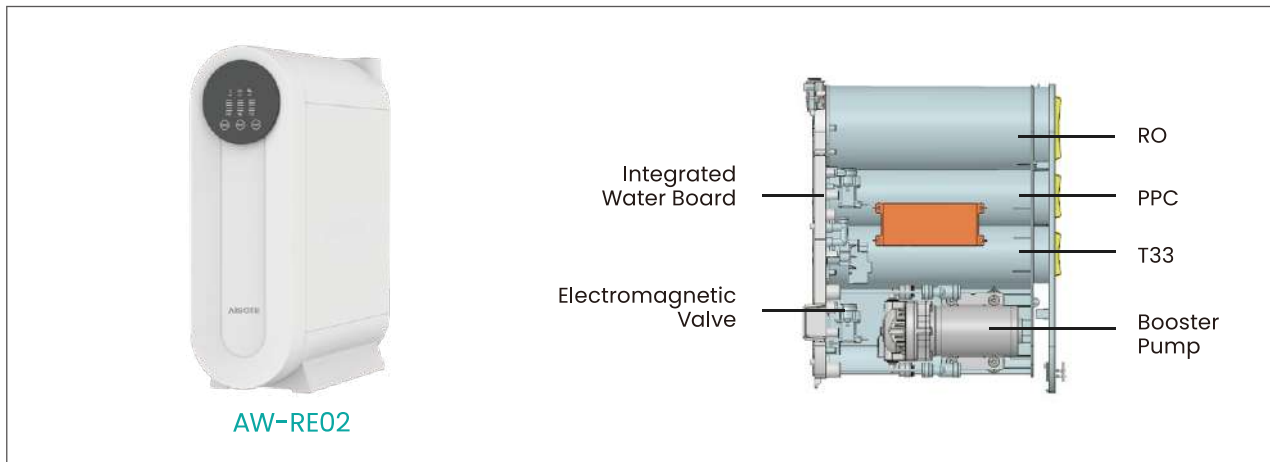

Features / 产品特点

- Slim body with modular structure
- High flow with tankless design
- Integrated water manifold module with no water leakage
- Composite three filters cartridge for easy replacement
- High-precision filtration with long-lasting water-saving RO membrane
- Long service life of filter cartridge with life reminder
- Three-stages composite filter , separated post carbon filter, more high-end , easy to change filter
- 模块化结构 机身纤薄
- 大流量无桶设计 新鲜畅饮
- 集成水路设计 无漏水隐患
- 长效节水RO膜 高精度过滤
- 复合三芯 独立后置炭滤芯显高端 换芯便捷
- 滤芯寿命和水质监测 使用安心



AW-RE01



AW-RE03



AW-RE04


Specification/产品参数				
RO Flow Available / 通量	75GPD	400GPD	500GPD	600GPD
Power / 功率	36W	65W	65W	80W
Voltage / 电压	24V	24V	24V	24V
Purified Water Flow Rate / 纯水流速	0.2L/min	1.04L/min	1.3L/min	1.56L/min
Pressure Tank / 压力桶	3.2G	—	—	—
RO Permeate: drain / 净废比	2:1	Input Water Pressure / 进水压力		0.1-0.4Mpa
First Filter / Service Life / 第一级滤芯	PPC (PP+Carbon) / 12 months		Inlet Water Temperature / 进水温度	5~38°C
Second Filter / Service Life / 第二级滤芯	RO (Reverse Osmosis) / 24 months		Ambient Temperature / 环境温度	4~40°C
Third Filter / Service Life / 第三级滤芯	T33 (Post Carbon) / 12 months		Product Size / 产品尺寸	443*132*356 (mm)
Carton Size / 包装尺寸	675*192*465 (mm) RA07: 755*265*496 (mm)			

2327 Series / 系列

Features / 产品特点

- Slim body with modular structure
- Built-in water tank , high rate flow experience is better
- Integrated water manifold module with no water leakage
- High-precision filtration with long-lasting water-saving RO membrane
- Composite filter cartridge for easy replacement
- Long service life of filter cartridge with life reminder


- 模块化结构 机身纤薄
- 内置水箱 超大流量 体验更佳
- 集成水路设计 无漏水隐患
- 长效节水RO膜 高精度净化
- 集成复合滤芯 便捷换芯
- 滤芯寿命提醒 使用安心

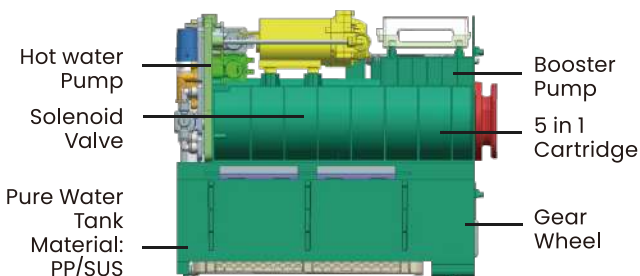

AW-RM01

Specification / 产品参数	
RO Flow Available / 通量	75GPD
Purified Water Flow Rate / 纯水流速	≥3L/min
RO Permeate: drain / 净废比	2:1
Filter / Service Life / 滤芯	5 in1 composite filter cartridge (ACF+RO+C) / 12-24 months
Water Tank Inside / 内置水箱	4.7L
Input Water Pressure / 进水压力	0.1-0.4Mpa
Inlet Water Temperature / 进水温度	5~38°C
Ambient Temperature / 环境温度	4~40°C
Product Size / 产品尺寸	462*150*377 (mm)
Customizable heating machine model / 可定制加热机型	

2321 Series / 系列

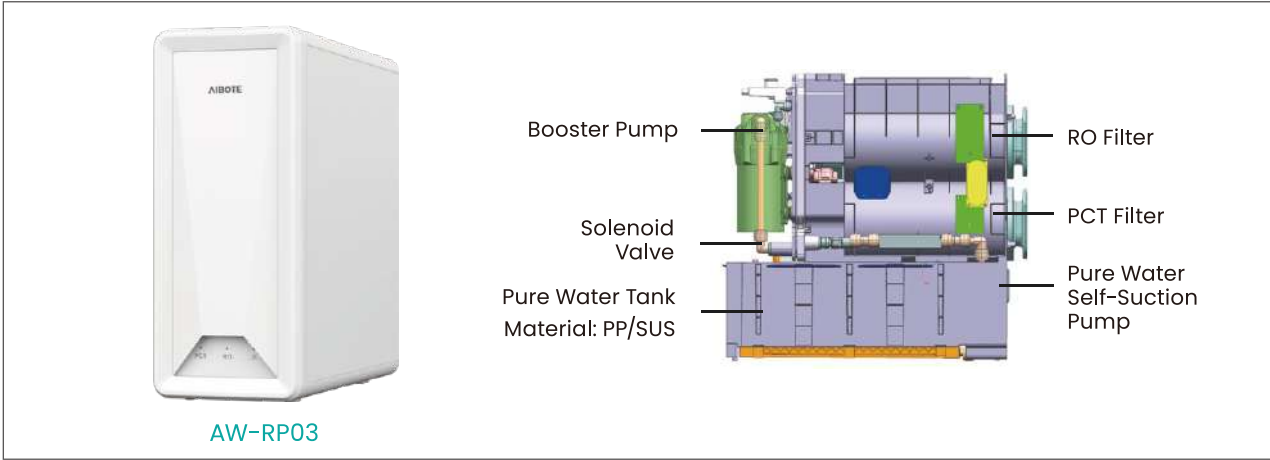

Features / 产品特点

- Slim body with modular structure
 - High flow with water tank inside
 - Integrated water manifold module with no water leakage
 - Smart faucet for better operating experience
 - High-precision filtration with long-lasting water-saving RO membrane
 - Flow-through UV sterilization with overfilled water detector
- 模块化结构 机身纤薄
 - 内置水箱 超大流量
 - 集成水路设计 无漏水隐患
 - 智能龙头 提供更好的用水体验
 - 长效节水RO膜 高精度净化
 - 过流杀菌 防溢水探针



AW-RP01




AW-RP02

Specification/产品参数	
RO Flow Available / 通量	400GPD-600GPD
Purified Water Flow Rate / 纯水流速	400G:1.04L/min 600G: ≥1.56L/min
Ambient Water Flow Rate / 常温出水速度	4.6L/min / 6.3L/min (纯水箱满水)
RO Permeate: drain / 净废比	2:1
First Filter / Service Life / 第一级滤芯	PCT (PP+Carbon+Post Carbon) / 12-24 months
Second Filter / Service Life / 第二级滤芯	RO (Reverse Osmosis) / 24-36 months
Water Tank Inside / 内置水箱	4.7L
Input Water Pressure / 进水压力	0.1-0.4Mpa
Inlet Water Temperature / 进水温度	5-38°C
Ambient Temperature / 环境温度	4-40°C
Product Size / 产品尺寸	445*176*418 (mm)
Customizable heating machine model / 可定制加热机型	

Under Sink Instant Heating RO Water Purifier 厨下式反渗透净热一体机



2103 Series / 系列

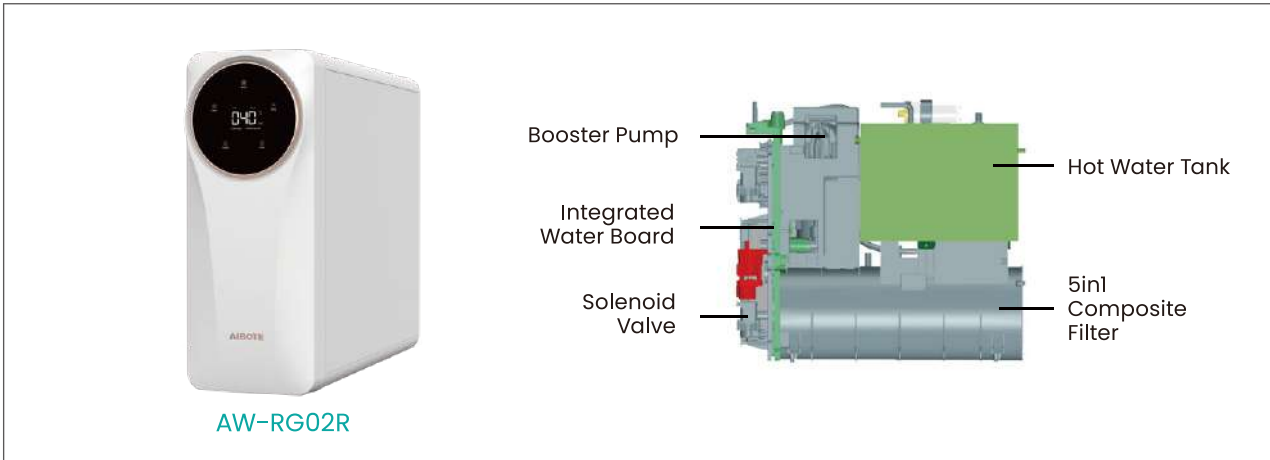

Features / 产品特点

- Nano thick film instant heating technology
 - Smart faucet with multiple temperature options
 - Integrated water manifold module with no water leakage
 - 5 in 1 composite filter cartridge with one-click replacement
 - One-click water evacuation for fresh water
 - Pasteurization technology and anti-dry function
 - Dual-end smart display
- 纳米厚膜速热技术
 - 智能龙头 温度可选
 - 集成水路设计 无漏水隐患
 - 5 in 1复合滤芯 一键换芯
 - 一键排空 新鲜用水
 - 巴氏杀菌技术 防干烧功能
 - 双端智显 一目了然



AW-RG01R



AW-RG08R




AW-RG03R

Specification/产品参数	
RO Flow Available / 通量	600GPD / 800GPD
Power / 功率	2200W
Voltage / 电压	220V
Purified Water Flow Rate / 纯水流速	1.56L/min (600GPD) 2.08L/min (800GPD)
Hot Water Dispensing Flow(≥90°C) / 热水流速	≥750ml/min (for water tank 60°C) ≥500ml/min (for water tank 45°C)
Heating Method/加热方式	Heating pipe heating+Thick film instant heating
RO Permeate:drain / 净废比	2:1
Filter / Service Life / 滤芯	5 in1 composite filter cartridge (ACF+RO+C) / 12-18 months
Input Water Pressure / 进水压力	0.1-0.4Mpa
Inlet Water Temperature / 进水温度	5~38°C
Ambient Temperature / 环境温度	4~40°C
Product Size / 产品尺寸	460*150*380 (mm)
Carton Size / 包装尺寸	780*235*460 (mm)

2507 Series / 系列

Features / 产品特点

- 3L built-in hot water tank with super high flow rate
 - Smart faucet for better water experience
 - Integrated water manifold module with zero water leakage risk.
 - High-precision filtration with long-lasting water-saving RO membrane
 - Composite filter for quick & easy filter replacement
- 内置3L热胆 超大流量
 - 智能龙头 提供更好的用水体验
 - 集成水路设计 无漏水隐患
 - 长效节水RO膜 高精度净化
 - 复合滤芯 便捷换芯

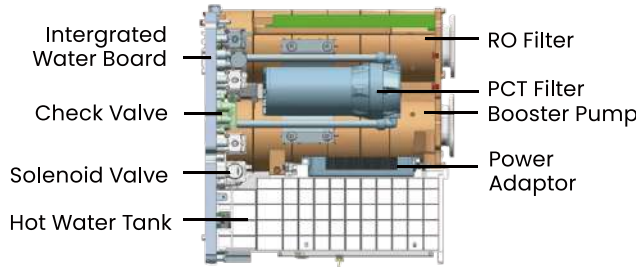


AW-RR01

Specification / 产品参数	
RO Flow Available / 通量	800GPD- 1200GPD
Power / 功率	1300W
Voltage / 电压	220V
Purified Water Flow Rate / 纯水流速	2.6L /min
Hot Water Dispensing Flow(≥90°C) / 热水流速	2L/min (3L)
Heating Method/加热方式	Heating pipe heating (1200W)
Hot Water Tank / 热胆容量	3L
RO Permeate:drain / 净废比	2:1
Filter / Service Life / 滤芯	PCT+RO
Product Size / 产品尺寸	423*198*3428 (mm)
Carton Size / 包装尺寸	

Under Sink RO Purifier with Hot & Cold Water
厨下式反渗透冷热净水机



2320 Series / 系列

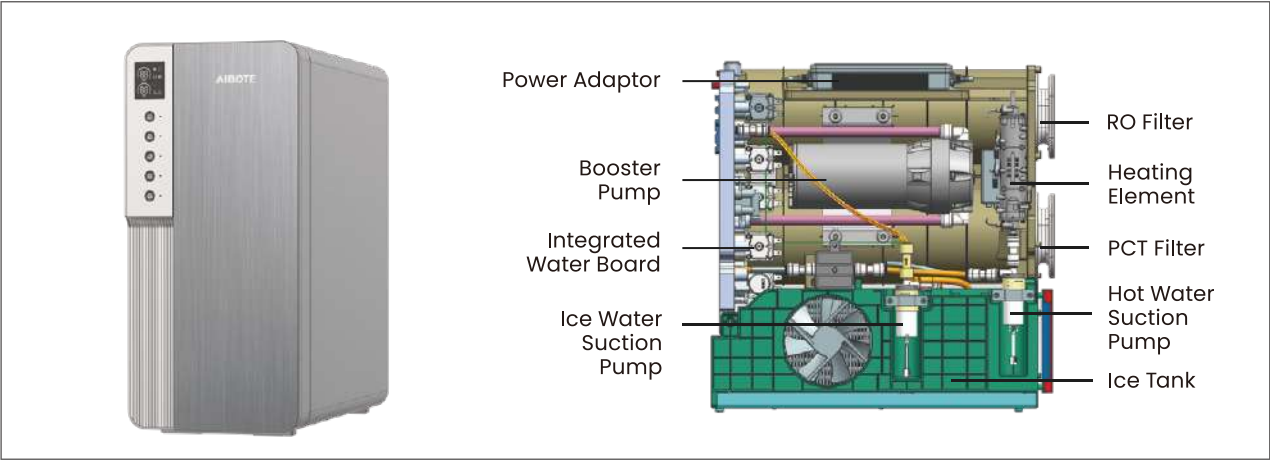

Features / 产品特点

- Slim body with modular structure
- Ultra-high flow with built-in water tank
- Compressor refrigeration for cold water
- Instant heating technology
- UV sterilization function and anti-dry function
- One-click water evacuation for fresh water
- Smart faucet for better operation experience
- 模块化设计 机身纤薄
- 内置水箱 超大通量
- 压缩机制冷 大量冰水随时用
- 瞬热技术 满足即时热水需求
- UV杀菌和防干烧功能 用水更安全
- 一键排空 水质时刻新鲜
- 智能龙头 提供更好的用水体验




AW-RN03



AW-RN01

Specification / 产品参数	
RO Flow Available / 通量	800G-1000G
Hot Water Flow Rate / 热水流速	≥20L/H, ≥90°C
Cold Water Capacity / 制冷能力	≥1.5L/h, ≤12°C
Filter / Service Life / 滤芯	PCT+RO
Water Temperature Selection / 水温选择	5-10°C / Ambient Temperature Water / 45°C / 65°C / 85°C / 100°C
Water Volume Selection / 杯量选择	250mL / 350mL / 500mL / 1000mL
Cold Water Tank / 冰胆容量	1L
Power / 额定总功率	2200W (Cold Water 80W + Hot Water 2100W)
Product Size / 产品尺寸	430*198*435 (mm)
Carton Size / 包装尺寸	600*290*615 (mm)

2509 Series / 系列

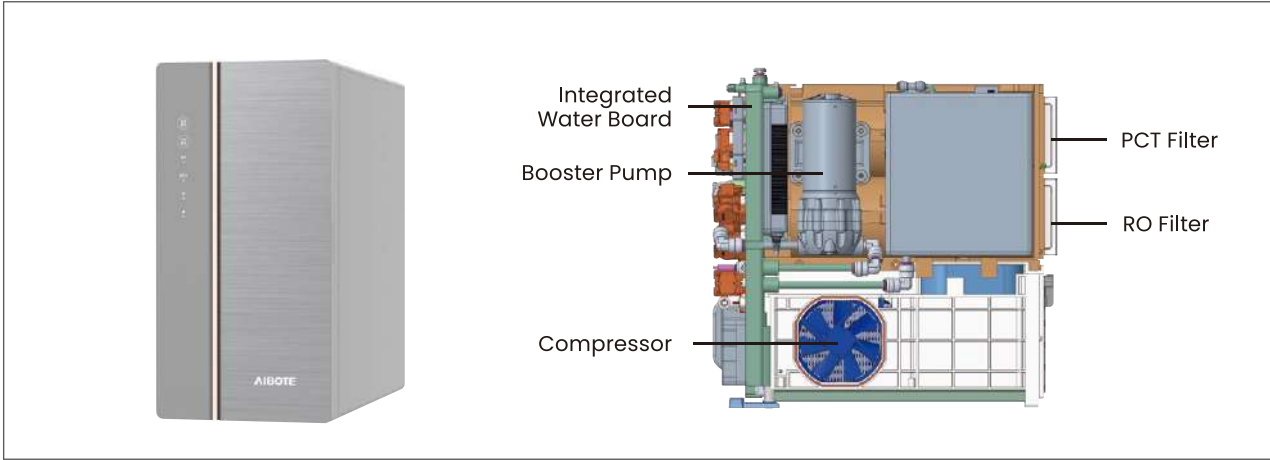

Features / 产品特点

- Dual hot and cold water tanks
 - Hot water 2L/min, ambient water 6.3L/min
 - Integrated water board
 - Composite filter cartridge
 - low noise, zero stale water
 - Cooling capacity: 2.5L/H
- 双胆（冷热双胆）
 - 热水流速 2升/分，常温水流速 6.3升/分
 - 集成水路设计
 - 复合滤芯技术
 - 低噪运行，零陈水
 - 制冷量：2.5升/小时



AW-RU01



AW-RU02

Specification / 产品参数

RO Flow Available / 通量	400-800G
Power / 功率	1450W
Power / 制热功率	1300W
Voltage / 电压	AC220V
Purified Water Flow Rate / 纯水流速	2.6L/min
Hot Water Dispensing Flow(≥90°C) / 热水流速	2L/min
RO Permeate: drain / 净废比	2:1
Hot Water Tank / 热水箱	2L
Heating Method/加热方式	Heating pipe heating
UV Sterilization / UV杀菌	Y
Ice Tank / 冰胆容量	1.8L
First Filter / Service Life / 第一级滤芯	PCT (PP+Carbon+Post Carbon) / 12 months
Second Filter / Service Life / 第二级滤芯	RO (Reverse Osmosis) / 24 months
Product Size / 产品尺寸	465*215*432 (mm)
Carton Size / 包装尺寸	633*345*594 (mm)

Built in RO Water Purifier 嵌入式反渗透净水机



2407 Series / 嵌入式反渗透净水机


Features / 产品特点

- Zero-stale water technology — Fresh water for the First Cup
- High-efficiency refrigeration with compressor for 5°C cold water
- 5 stages filtration system
- 11.26-inch Smart screen
- Hot and cold dual-pipe independent water outlet
- UV sterilization

- 专利零陈水技术 首杯TDS值达到饮用级别
- 压缩机高效制冷 5°C极致冰水体验
- RO反渗透精滤 5级过滤系统健康直饮
- 11.26英寸极致智慧大屏 智能操控直观清晰
- 冷热双管路独立出水 无混水 更畅饮
- 水箱UV杀菌 饮水更安全



AW-RQ01

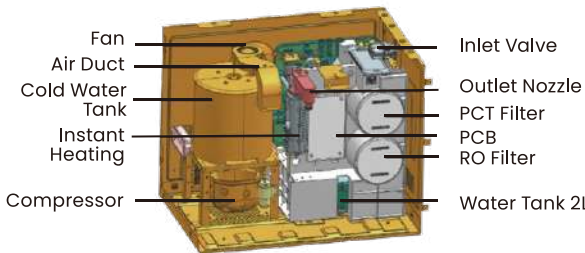

Specification / 产品参数	
RO Flow Available/通量	600G
Power/额定总功率 (W)	3500W
Heating Power/制热功率	3300W
Cooling Power/制冷功率	110W
Hot Water Flow/连续制热水能力	36L/H (≥90°)
Cold Water Flow/连续制冷水能力	>3L/H (<10°C)
Cold Water Tank/冰胆容量	2.2L
Ambient Water Tank/水箱容量	2.4L
Filter/Service Life/滤芯配置	PCT+RO
Purified Water Flow Rate/额定流量	≥1.56L/min
Product Size / 产品尺寸	594*455*396 (mm)

2520 Series / 嵌入式反渗透净水机


Features / 产品特点

- 4 in 1: Ice, Cold, Ambient & Hot water
- Zero-stale water technology — Fresh water for the First Cup
- High-efficiency refrigeration with compressor for 5°C cold water
- 5 stages filtration system
- 11.26-inch Smart screen
- Hot and cold dual-pipe independent water outlet
- UV sterilization

- 冰、冷、净、热四合一
- 专利零陈水技术 首杯TDS值达到饮用级别
- 压缩机高效制冷 5°C极致冰水体验
- RO反渗透精滤 5级过滤系统健康直饮
- 11.26英寸极致智慧大屏 智能操控直观清晰
- 冷热双管路独立出水 无混水 更畅饮
- 水箱UV杀菌 饮水更安全



AW-RQ02

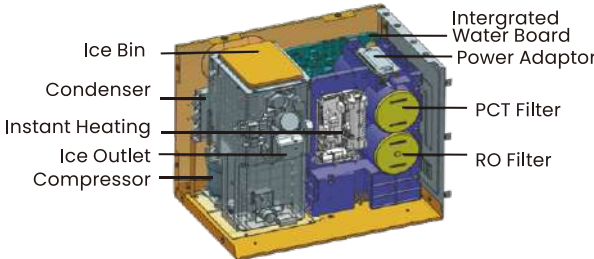

Specification / 产品参数	
RO Flow Available/通量	600G
Power/额定总功率 (W)	3200W
Heating Power/制热功率	3000W
Cooling Power/制冷功率	90W
Hot Water Flow/连续制热水能力	30L/h (≥90°)
Cold Water Flow/连续制冷水能力	>2L/h (<10°C)
Cold Water Tank/冰胆容量	1L
Ambient Water Tank/水箱容量	2.4L
Filter/Service Life/滤芯配置	PCT+RO
Purified Water Flow Rate/额定流量	1.56L/min
Product Size / 产品尺寸	594*410*455 (mm)
Carton Size/包装尺寸	695*510*555 (mm)