



(agora)[®]

Upholstery pro

NAUTIC COLLECTION

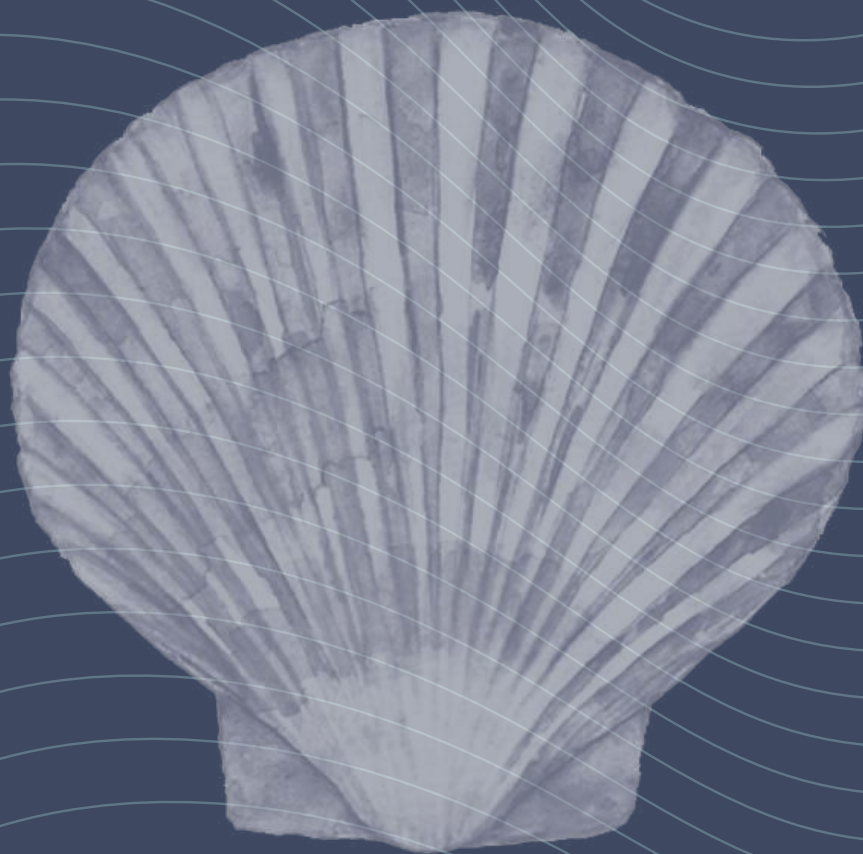


ATLANTIS

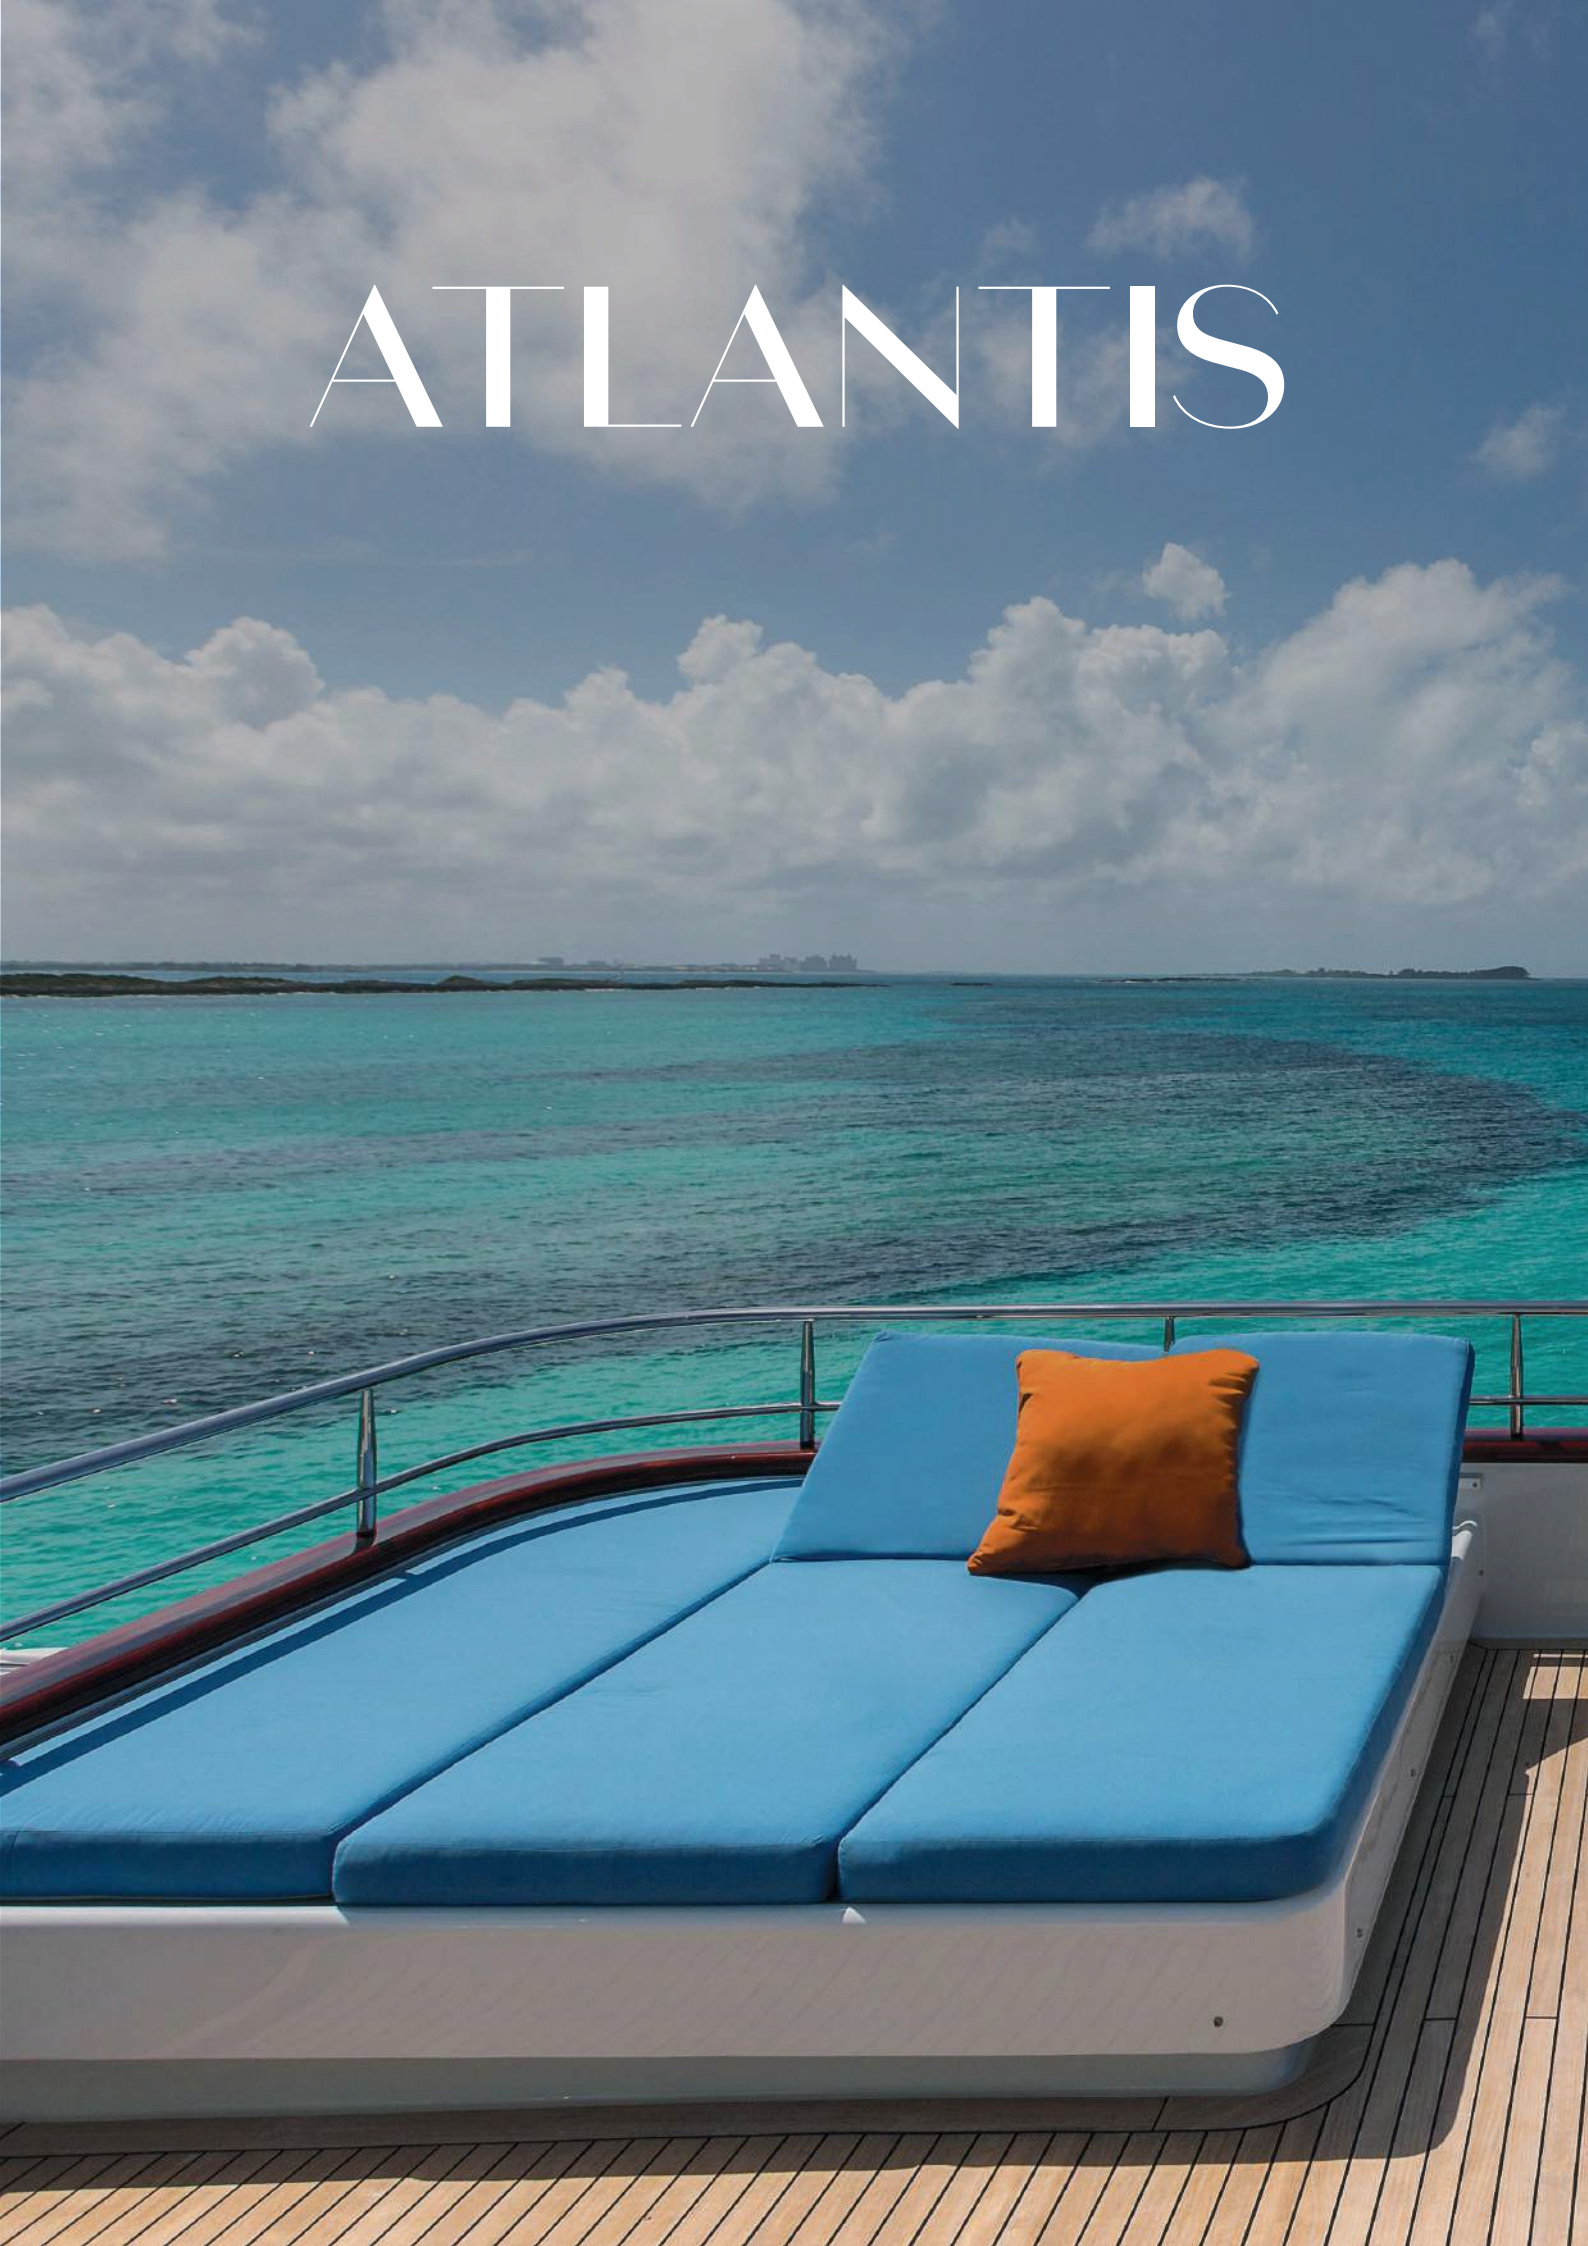

Agora Atlantis



Atlantis **Optik**
20007



Atlantis **white**
20013




Atlantis **Off-White**
20005



Atlantis **Cream**
20003



Atlantis **Bone**
20010



Atlantis **Oat**
20006



Atlantis **Fossil**
20012



Atlantis **Turkis**
20004




Atlantis **Royal Blue**
20002



Atlantis **Red**
20008



Atlantis **Canary**
20011



Atlantis **Noir**
20009

Composition / Composición	80.82% PVC Phthalate free / 80.82% PVC libre de ftalatos 19.18% Polyester / 19.18% Poliéster
Width / Ancho	1.37 m / 1.50 yards
Weight / Peso	730 g/m ²
Length of rolls / Longitud de las piezas	30 m / 32.8 yards
Finish / Acabado	Sanitized-Actifresh®
UPF	50+ AZ/NZS 4399/1996
Water column / Columna de agua	>10.000 mm DIN EN 20811
Tear resistance / Resistencia al desgarro	Warp Urdimbre 25 N Weft Trama 25 N ISO 4674 - 1
Tensile strength / Resistencia a la tracción	Warp Urdimbre 350 N Weft Trama 300 N ISO 1421 1
Vynil adhesion / Adherencia del vinilo	Warp Urdimbre 20 N Weft Trama 20 N ISO 1421 1
Elongation / deformation / Elongación / deformación	Warp Urdimbre 25% min/10% max Weft Trama 50% min/18% max SAE J855
Abrasion resistance / Resistencia a la abrasión	>400.000 Martindale DIN EN ISO 12947-2:2016 >50.000 Wyzenbeek CFFA 1A
Oil resistance / Resistencia a aceites	No change Sin cambio DIN 53 359
Cold impact / Impacto en frío	No cracks Sin Grietas FLTM BN 128-01
Flame resistance / Resistencia a la llama	DIN 4102 B2 Önorm B 3825 Group 1 EN 1021 Parts 1 & 2 UNI 9175 Class 1/IM ÖNORM A 3800 Part 1 Class Q1 SAE J369/MVSS302 100mm/min. max IMO-MSC-307(88) (FTP code 2010) Annex 1 Part 8 FAR 25/853 Appendix F Part I 10" FED-STD-191A Test 5903 6 in max.

COLOUR FASTNESS SOLIDEZ DEL COLOR

To light / A la Luz	6/8 UNE EN ISO 105-B02:2014
To sea water / Al agua marina	4-5/5 DIN EN ISO 105-E02
To chlorinated water / Al agua clorada	4/5 UNE EN ISO 105-E03:2010
To artificial saliva / A saliva artificial	5/5 DIN 53 160 - 1
To artificial sweat / A sudor artificial	5/5 DIN 53 160-2
To perspiration / A la transpiración	4-5/5 DIN EN ISO 105 E - 04
To rubbing / Al frote	Dry Seco 5.0 in AATCC Wet Humedo 5.0 in AATCC UNE EN ISO 105-X12:2016
Thermal aging / Envejecimiento térmico	4/5 LP - 463LB - 13 - 01

CLEANING INSTRUCTIONS MANUTENCIÓN



Use neutral soap Utilizar jabón neutro

Sensitive values of tolerance +/- 7% Valores susceptibles de tolerancia de +/- 7%



Atlantis **Turkis** 20004



Uses Usos



DIMENSIONAL STABILITY
ESTABILIDAD DIMENSIONAL



PET FRIENDLY
APTO PARA ANIMALES




MOULD RESISTANT
ANTIMOHO



KID PROOF
A PRUEBA DE NIÑOS



UV RESISTANT
RESISTENCIA UV



DURABLE
DURADERO



STAIN RESISTANT
ANTIMANCHAS



NO CONDUCTOR
NO CONDUCTOR



WATERPROOF
IMPERMEABLE



EASY TO CLEAN
FÁCIL DE LIMPIAR

Qualities Cualidades

ARGOS



Agora Argos



Argos whisper
20016



Argos Limestone
20021



Argos Sand
20026



Argos Integral
20020



Argos Mineral
20022



Argos Coconut
20017



Argos Basalt
20015



Argos Silver
20027



Argos Pearl Grey
20024



Argos Cloud
20025



Argos Graphite
20018



Argos Carbon
20023



Argos Indigo
20019



Argos Admiral
20014



Argos Tirol
20028



Argos Billiard
20029

COLOUR FASTNESS SOLIDEZ DEL COLOR	
To light A la Luz	6/8 UNE EN ISO 105-B02:2014
To sea water Al agua marina	4-5/5 DIN EN ISO 105-E02
To chlorinated water Al agua clorada	4/5 UNE EN ISO 105-E03:2010
To artificial saliva A saliva artificial	5/5 DIN 53 160 - 1
To artificial sweat A sudor artificial	5/5 DIN 53 160-2
To perspiration A la transpiración	4-5/5 DIN EN ISO 105 E - 04
To rubbing Al frote	Dry Seco 5.0 in AATCC Wet Humedo 5.0 in AATCC UNE EN ISO 105-X12:2016
Thermal aging Envejecimiento térmico	4/5 LP - 463LB - 13 - 01
CLEANING INSTRUCTIONS MANUTENCIÓN	
	
Use neutral soap Utilizar jabón neutro	

Sensitive values of tolerance +/- 7% Valores
susceptibles de tolerancia de +/- 7%



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100



Composition / Composición	80.82% PVC Phthalate free / 80.82% PVC libre de ftalatos 19.18% Polyester / 19.18% Poliéster
Width / Ancho	1.37 m / 1.50 yards
Weight / Peso	730 g/m²
Length of rolls / Longitud de las piezas	30 m / 32.8 yards
Finish / Acabado	Sanitized-Actifresh® Embossed Gofrado
UPF	50+ AZ/NZS 4399/1996
Water column / Columna de agua	>10.000 mm DIN EN 20811
Tear resistance / Resistencia al desgarro	Warp Urdimbre 25 N Weft Trama 25 N ISO 4674 - 1
Tensile strength / Resistencia a la tracción	Warp Urdimbre 350 N Weft Trama 300 N ISO 1421 1
Vynil adhesion / Adherencia del vinilo	Warp Urdimbre 20 N Weft Trama 20 N ISO 2411
Elongation / deformation Elongación / deformación	Warp Urdimbre 25% min/10% max Weft Trama 50% min/18% max SAE J855
Abrasion resistance Resistencia a la abrasión	>400.000 Martindale DIN EN ISO 12947-2:2016 >50.000 Wyzenbeek CFFA 1A
Oil resistance Resistencia a aceites	No change Sin cambio DIN 53 359
Cold impact Impacto en frío	No cracks Sin Grietas FLT M BN 128-01
Flame resistance Resistencia a la llama	DIN 4102 B2 Önorm B 3825 Group 1 EN 1021 Parts 1 & 2 UNI 9175 Class 1/IM ÖNORM A 3800 Part 1 Class Q1 SAE J369/MVSS302 100mm/min. max IMO-MSC-307(88) (FTP code 2010) Annex 1 Part 8 FAR 25/853 Appendix F Part I 10" FED-STD-191A Test 5903 6 in max.

Argos **Indigo** 20019

Qualities Cualidades

 DIMENSIONAL STABILITY ESTABILIDAD DIMENSIONAL	 MOULD RESISTANT ANTIMOHO	 UV RESISTANT RESISTENCIA UV	 STAIN RESISTANT ANTIMANCHAS	 WATERPROOF IMPERMEABLE
 PET FRIENDLY APTO PARA ANIMALES	 KID PROOF A PRUEBA DE NIÑOS	 DURABLE DURADERO	 NO CONDUCTOR NO CONDUCTOR	 EASY TO CLEAN FÁCIL DE LIMPIAR

Uses Usos





Travessera de les Corts, 102 08028 Barcelona (Spain)

+34 933 397 150
sauleda@sauleda.com



@sauledatextiles

www.sauleda.com