




Piedmont

ENERGY SAVING ROD

TECHNICAL & COMMERCIAL DATA SHEET

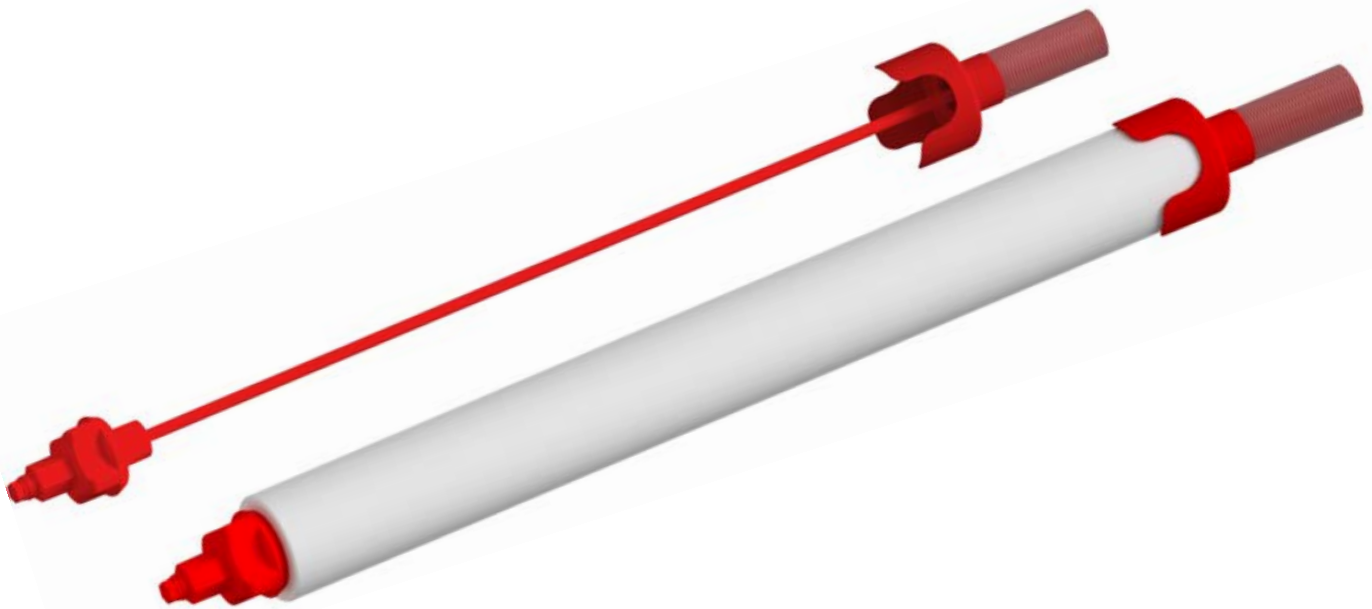

DS-SP-PC-v08 / 12-09-2023


Piedmont Pacific

1048 La Mirada Court, Vista,
CA 92081
USA

330, St-Vallier Est, Suite 340,
Québec City, QC G1K 9C5
CANADA

c/ Uribitarte 18 , 6º planta
Bilbao, Bizkaia 48001
SPAIN

sales@piedmontpacific.com / www.piedmontpacific.com

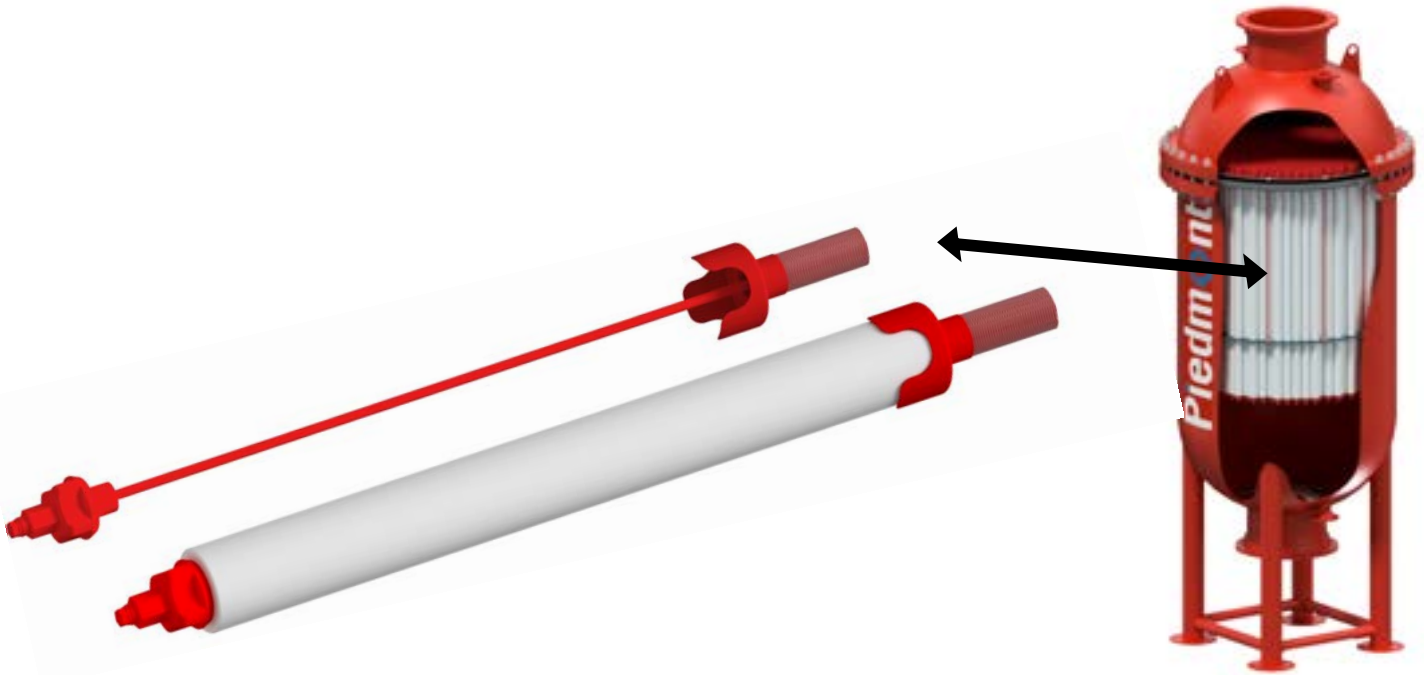

Reinforced, state of the art internal cartridges support rods compared to existing designs in the market

The ENERGY SAVING ROD is the element used to join the filter cartridges and the filter housings, through its intermediate tube sheet. These pieces submerged in seawater and under wear conditions due to mechanical and chemical fatigue, then susceptible to deterioration, requiring their replacement as a spare part.



MAIN CHARACTERISTICS

MATERIAL NORYL + FRP (fiberglass)

- 90°C Design Temperature
- High mechanical resistance (2500 N)
- High chemical resistance



INNOVATE MANUFACTURING PROCESS

- One single piece (including the ends)
- No glue (Overinjected)
- No risks of chemical attacks in joints

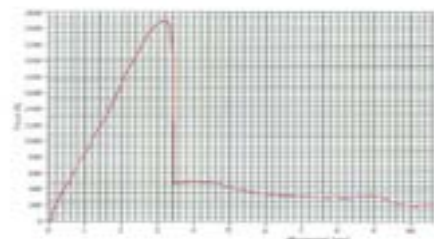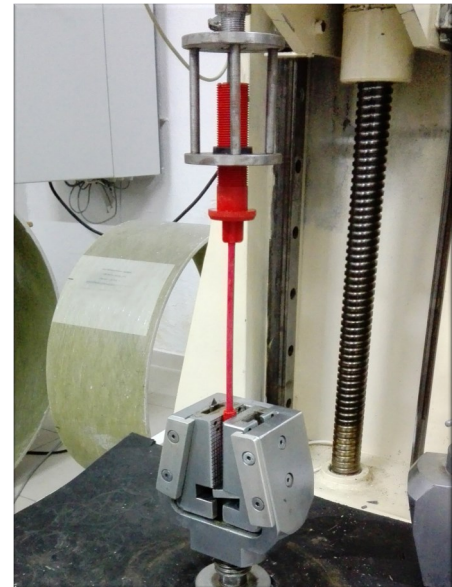


LESS DIFFERENTIAL PRESSURE COMPARED TO EXISTING MODELS


- Comparison differential pressure curve between Piedmont and competitions.

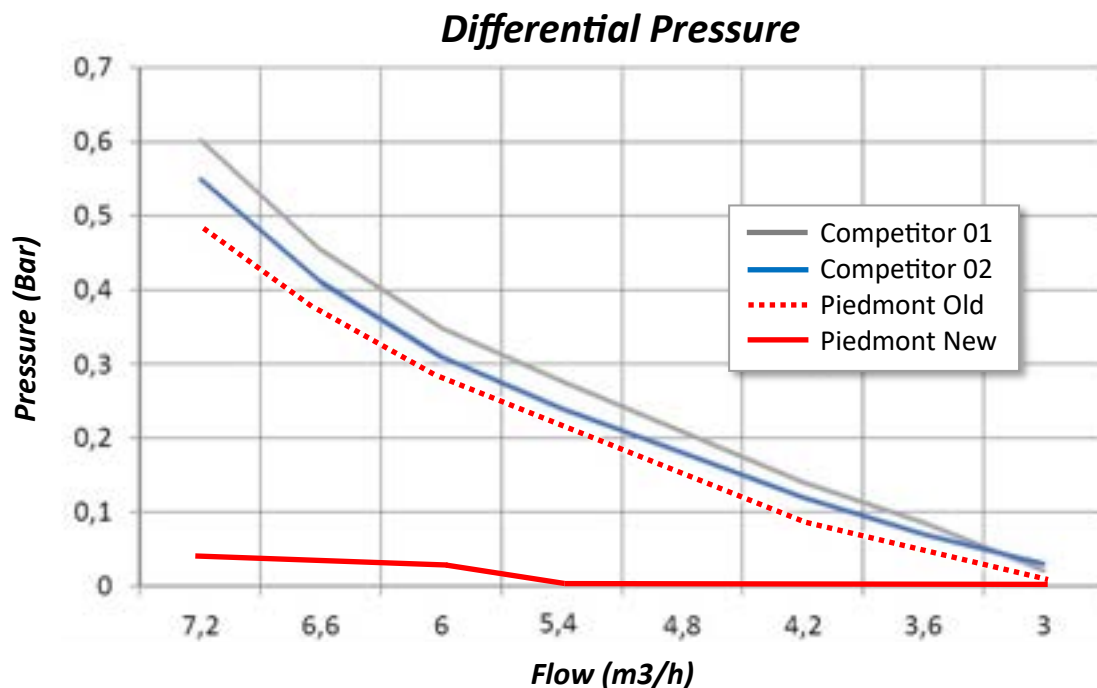

COMPETITOR 01
MINIMUM AREA
281.6 mm²



COMPETITOR 01
MINIMUM AREA
258.9 mm²




PIEDMONT NEW
MINIMUM AREA
587.4 mm²

Reducing the pressure loss, allow us important Energy savings per year (Kwh) and a consequently, also an important Carbon Footprint reduction (Metric tons of Carbon dioxide equivalent).

EASY ASSEMBLY-EASY MAINTENANCE

- High-speed assembly nut with ergonomic design for easy and fast cartridge replacement.
- No lattice or grating system.
- Dramatic time reduction for interchanging the cartridges.

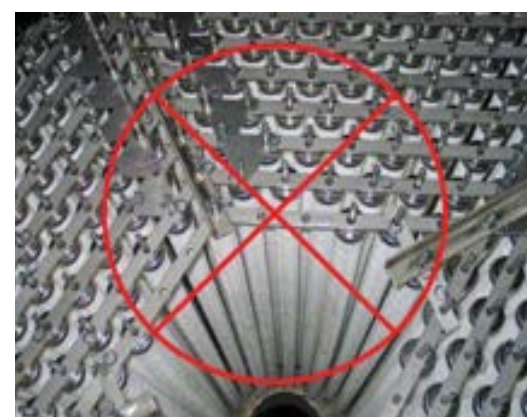



REFERENCES

- 200.000m³/day. SWRO plant.
Not a single break during the first year of operation.



HIGH VERSATILITY

- It is valid for Double Open End (DOE) cartridges (string-wound and melt-blown).
- It absorbs high cartridges length differences (up to 100 mm).

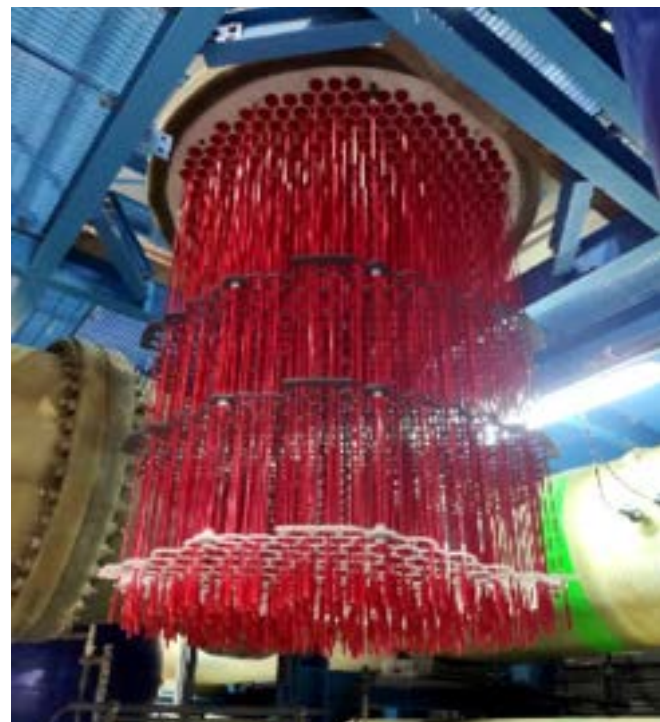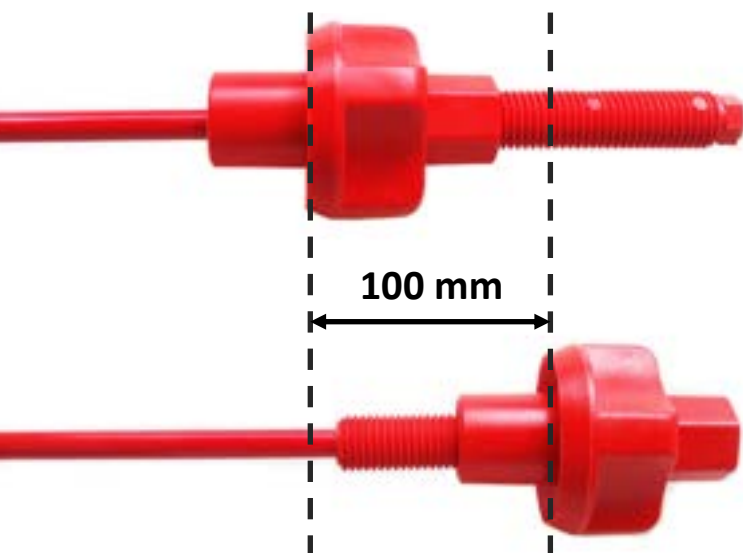

ADVANTAGES OF ENERGY SAVING ROD

✓	No springs are required. Easy and quick maintenance
✓	Posibility of using DOE elements (string-wound and melt-blown)
✓	High design temperature (90° C)
✓	One single piece without glue
✓	High mechanical resistance
✓	Low differential pressure
✓	No lattice or grating system
✓	Zero reported breaks
✓	It absorbs cartridge lenght differences up to 100 mm



CORROSION RESISTANT EQUIPMENT FOR WATERTREATMENT & DESALINATION APPLICATIONS

Piedmont
www.piedmontpacific.com



CAN: +1 877.847.6763 / USA: +1 760.305.7616 / ESP: +34 944 740 557 / sales@piedmontpacific.com