


TWIN CAM
PUMP

MARINE
FLOW





Twin Cam pump

- Dual Inlet / Dual outlet; Single Inlet / Dual Outlet; Dual inlet / Single outlet.
- Easy Impeller servicing with removable drive hub to facilitate twist in of the impeller whilst the shaft is locked to the drive system.
- Max Outlet pressure > 4 Bar.

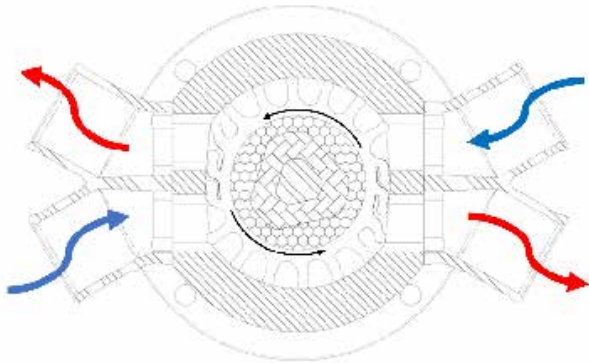

Unique Impeller Design

- Impeller diameter and blade length and pitch optimised for best pressure / volume characteristics.
- Patented Removable Inner Hub, greatly simplifies fitting and removal of the impeller in service. Simple removal and fitting tools to make the task easy.
- Patented double sealing lip, optimises the number of working (pumping) impeller blades.

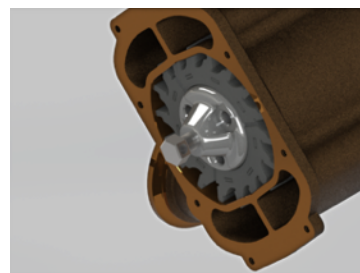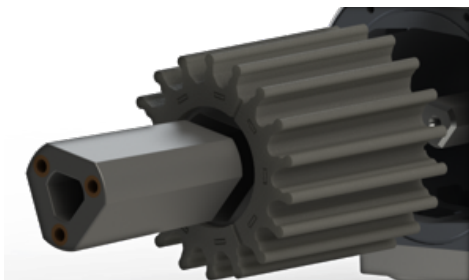

Impeller Removal Tool

Patented Twin-cam Symmetrical design allows much larger flexible impeller pumps to be realised, realising the following benefits:

- The pressure load is balanced across the impeller, and does not act on the shaft and bearings.
- For a given size of impeller twice the volume of water can be pumped.
- Pumped volumes from 600 litres to 2000+ litres per. minute.
- Pump drive speed up-to 2,000 RPM.

MARINE FLOW LTD

UNIT 6 | 9 GLEN TYE ROAD | BROADLEYS INDUSTRIAL ESTATE | STIRLING | SCOTLAND | FK7 7LH
SALES@MARINEFLOW.COM | WWW.MARINEFLOW.COM