


PRL1 PUROLINE CWR FILTER

PRL1.00U80.001-1



Single-stage UPS filter based on a single Puroline cartridge. The softening ion exchange resin inside the cartridge is a compact solution for removing carbonate hardness from water.

Functions: Removes carbonate hardness from water

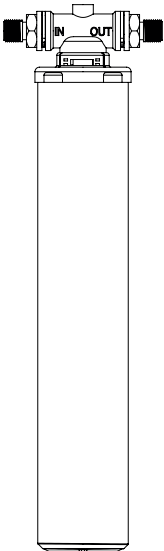

TECHNICAL SPECIFICATION

PARAMETER		UNIT	VALUE
Height		cm	54
Width		cm	15,5
Depth		cm	12
Filtration medium		-	Ion exchange resin
Connection*		„	1/2, 3/4, 3/8
Capacity		L	2300*
Maximum flow		L/min	2
Inlet water parameters	Temperature range	°C	2 – 38 °C
	Pressure range	bar	1 - 7
	pH range	-	2 - 11
Net weight		kg	2,2
Gross weight		kg	2,4

(*) - for 10 °KH, bypass 30%

