


# PHILIPS

Horticulture LED Solutions

Philips GreenPower LED  
toplighting force 2.1



## Unlock lighting intelligence to steer your crop and energy consumption

### Dynamic crop steering for improved business results

Unlock your lighting intelligence with the GreenPower LED toplighting force that is designed to optimize your business results. The advanced LED fixture offers a very high light output and precision steering in combination with the Philips GrowWise control system and has an excellent light efficacy. Whether you want to steer your crop based on its optimal light requirements, or you want to manage your energy consumption; the TLF offers the best options today. It opens new opportunities for the future in exact set-point/light control or wireless load balancing aFRR energy trading. These features can be seamlessly integrated with your existing climate computer, the tailored light recipes safeguard steering based on external factors like the amount of sunlight or fast changing energy prices. Manage your energy consumption, yield and adapt to the specific needs of the crop and its development stage.

The Quadro Beam lens ensures superb light uniformity, delivering a rectangular beam at high light output, for optimal fit in your greenhouse layout. This enables fewer fixtures for the same surface, a perfect choice for reduced installation costs and maximizing light efficiency.

When you want to generate the highest optimized light level with the fewest grow lights possible, the Philips GreenPower TLF 2, 3 and 4 channel fixture is your smart LED investment stepping into dynamic light control, unlocking the intelligent lighting potential in your greenhouse.

The current multichannel lighting options, including 1040W, 1170W, and 1400W fixtures, now include **new additions of 800W, 1040W and 1170W fixtures** with 4-channel control, offering wider flexibility in light-plan design. By combining the TLF with a Philips GrowWise Control System, you have the flexibility to create dynamic light recipes to achieve the next level in crop optimization. With light outputs up to 5150  $\mu\text{mol/s}$  and an efficacy up to 4.3  $\mu\text{mol/J}$  (at 50% input power) or up to 3.9  $\mu\text{mol/J}$  (at 100% light output) this is the perfect choice for crops that need a lot of high efficient light.

### Key benefits



- 1170W - 4 channel enabled "Exact light control" Red, Blue, White, Far Red
- Quadro Beam optics for superior light uniformity
- 2 and 3 Channel color control to steer crop development and energy consumption
- Simplified E-installation, no need of control wires
- Flexible zoning via possible via proven wireless control technology
- Max. plug power utilization and energy trading prepared
- Max. PPF of 5150  $\mu\text{mol/s}$  with an energy efficacy up to 3.9  $\mu\text{mol/J}$  at 100%

**High light output combined with Quadro Beam lens for superior light uniformity**

The TLF enables new high light output options, up to 5150 µmol/s. The newly developed Quadro Beam lens ensures uniformity in all directions even at high light outputs. This enables a light plan with fewer fixtures for the same surface, reducing installation costs.


**Light recipe set points explained**

Exact set-point/fixture or real power control goes one step further and is generated from Philips GrowWise control in combination with the newly added 4 channel fixtures where GrowWise is your climate computer interface to secure the Exact set-points.


The rectangular beam shape also provides a highly uniform light distribution at shorter distances between the LED fixture and the head of the crop. The IP 66 fixture design in combination with the flat glass cover makes cleaning extremely easy, reducing your cost of maintenance.

The in 2024 introduced 2 and 3 channel Philips fixtures, as first step into dynamic lighting, offer the ability to adapt your grow lighting to the specific needs of your crop and its development stage. This dynamic light (& power) recipe is built by putting several static light recipes (set-points) over time, creating the desired dynamic light recipe.

**Top view greenhouse**

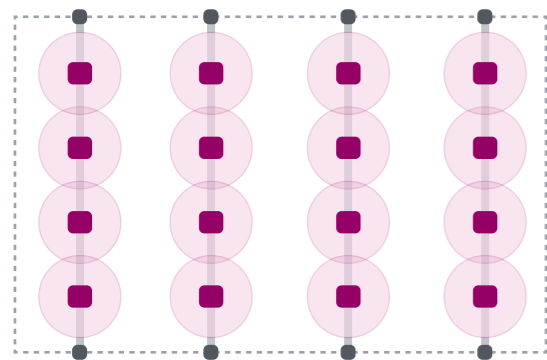

Standard Beam for optimal output/ efficiency

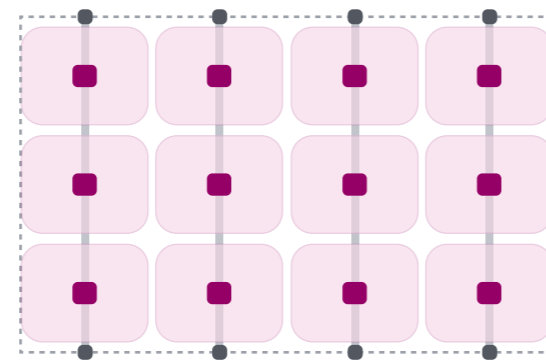

Quadro Beam for optimal uniformity with fewer grow lights/m² (reduced investment cost) and at lower distances between the grow light and head of the crop.

**Wireless communication or communication using mains wires**

With TLF you can choose if you want to control your fixtures using the existing mains wires as carrier (coded mains control) or you can choose for a wireless control interface which makes easy change of zones after installation possible. In both cases, wired (coded mains) or wireless, no additional control cables are required, simplifying installation and maintenance.

The wireless control option offers control of each compartment in the greenhouse separately to match the growth phase of the crop or different crops involved. Even after installation it gives flexibility in changing the division of control areas. A wireless installation also lowers installation cost for renovation of existing installations.

**Wired communication**

- Easy Installation**  
No need for extra wiring, use existing power line
- Reliable operation**  
Proven system in many projects worldwide
- Future proof**  
Expandable with wireless system

**Wireless communication**

- Lower installation cost**
- Flexible**  
Create multiple control areas
- Future proof**  
Allow bidirectional feedback communication

**Dynamic multi-channel color control**

The multi-channel color controllability in combination with the Philips GrowWise control system allows growers to adjust the light spectrum dynamically for precision control in crop development and morphology and optimizes light output. Seamlessly integrated with existing climate computers, the tailored dynamic light recipes safeguards steering based on external factors like the amount of sunlight or fast changing energy prices to manage energy consumption and yield and adapt to the specific needs of the crop and its development stage.

**Flexibility**

Growers can independently control far-red light for special end-of-day treatments, or switch to the most energy-efficient spectrum when less efficient parts of the spectrum are not required. This flexibility is particularly useful for crops that have highly variable light demands like cucumber, chrysanthemum or strawberries, or for young plant production where specific light conditions during the darker seasons are vital.

The **TLF fixtures** give you dynamic light steering capabilities to improve your crop quality and reduce energy consumption when needed. It operates in combination with the GrowWise control system, where setpoints can be programmed over a 24-hour cycle-time.


The **3-channel fixtures range** product range has a separate Far Red channel that enables you to control Far Red light independently from a basic light recipe. This feature is needed for end-of-day Far Red light treatment. For some crops, like

Chrysanthemum and Lisianthus, stretching can also be a challenge in the darker season when growing under full LED. The controllable far-red is a welcome feature to address this. When Far Red is no longer needed you can use the full power of the module to apply more efficient parts of the spectrum which can be a choice focusing on one dynamic lighting solution for cucumber and tomato.

The toplighting force portfolio also covers specific **2-channel** fixtures, which allow you to control specific white or blue, offering the possibility to adapt to the most efficient energy setting. With these specific fixtures, you can also grow using 100% Deep Red (being the most efficient wavelength) and choose to set your own blue for crop steering purposes or set your own white light for crop inspection.



**Additions to the family are the 4-channel, in 800W, 1040W and 1170W fixtures offering the possibility for "exact light control" for example, the specific 100% Deep Red "set-point" (red boost).** The 4-channel range with controllable red, white, blue and Far Red supports a full light recipe flexibility, which is very welcome for young plant breeding. This fixture range further unlocks lighting intelligence, being a luminaire system component operating together with a GrowWise control system supported by newly introduced GrowWise algorithms. These algorithms will automatically adjust your lighting system to real-time factors such as growing conditions, energy prices or market demand changes, helping you to improve your business case.

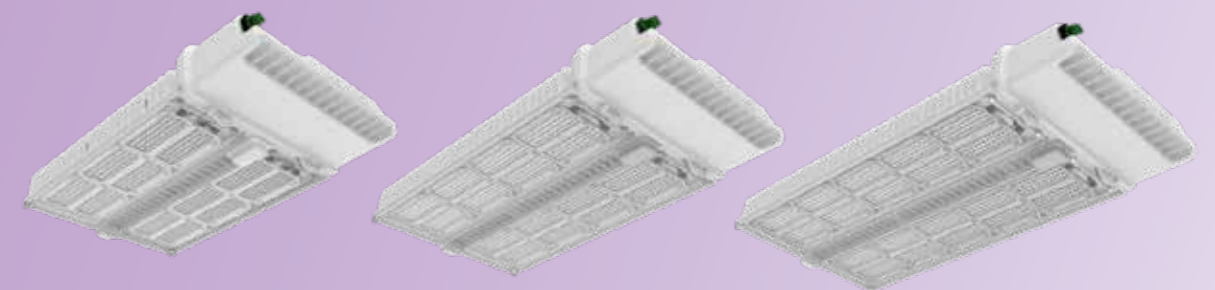

**NEW** 800W - 4CH

**NEW** 1170W - 4CH  
1040W - 4CH

1400W

**DIM**  
10%-100%  
for efficacy  
increase

**Multi Channel control**  
10%-100%

Controllable via **GrowWise** control system

Easy to Mount  
Easy to connect

Wireless Control

Mains wire Control

Input Voltage  
277-400V  
or 400V

Negligible Start-up current

High PF  
0,98

Low THD  
< 10%

No moving parts

IP 66 Rating

0 - 40°C Tamb

Standard & **Quadro Beam** optics

Gore-Tex™ Vent

# Product specification set-point data

## One channel DIM

Beam	Spectral version		Deep Red/White types (DRW)	Broad
	Spectral code (factory-set light recipe)		LB	VSN2
Standard beam	Typical photon flux	μmol/s	3600	2860
	Power consumption (max)	W	1040	1040
	Efficacy @ max power	μmol/J	3,5	2,8
	Efficacy at 50% (dimmed)	μmol/J	3,8	3,0
	Mains voltage <sup>2</sup>	V	480	277-400
	Control interface		CC1   WC1	CC1   WC1
Quadro Beam	Typical photon flux	μmol/s	3600	2860
	Power consumption (max)	W	1040	1040
	Efficacy @ max power	μmol/J	3,5	2,8
	Efficacy at 50% (dimmed)	μmol/J	3,8	3,0
	Mains voltage <sup>2</sup>	V	480	277-400
	Control interface		CC1   WC1	CC1   WC1

## 2-channel control

Beam	Spectral version		Deep Red/White types (DRW)					Deep Red/White/Far Red types (DRWFR) <sup>1</sup>
	Spectral code (factory-set light recipe)		LB					F6
Standard beam	Typical photon flux	μmol/s	4010	3800	3600	4280	5150	2760
	Power consumption (max)	W	1040	1040	1040	1170	1408	800
	Efficacy @ max power	μmol/J	3,9	3,7	3,5	3,7	3,7	3,5
	Efficacy at 50% (dimmed)	μmol/J	4,3	4,2	3,8	4,2	4,0	3,8
	Mains voltage <sup>2</sup>	V	277-400	277-400	277-400	277-400	400	277-400
	Control interface		CC2   WC2	CC2   WC2	CC2   WC2	CC2   WC2	CC2   WC2	CC2   WC2
Quadro Beam	Typical photon flux	μmol/s	4010	3800	3600	4280	5150	2760
	Power consumption (max)	W	1040	1040	1040	1170	1408	800
	Efficacy @ max power	μmol/J	3,9	3,7	3,5	3,7	3,7	3,5
	Efficacy at 50% (dimmed)	μmol/J	4,3	4,2	3,8	4,2	4,0	3,8
	Mains voltage <sup>2</sup>	V	277-400	277-400	277-400	277-400	400	277-400
	Control interface		CC2   WC2	CC2   WC2	CC2   WC2	CC2   WC2	CC2   WC2	CC2   WC2

## 3-channel control

Beam	Spectral version		Deep Red/White types (DRW)	Deep Red/White/Far Red types (DRWFR) <sup>1</sup>		
	Spectral code (factory-set light recipe)		MB	F1	F6	
Standard beam	Typical photon flux	μmol/s	3700	3600	4170	5050
	Power consumption (max)	W	1040	1040	1170	1408
	Efficacy @ max power	μmol/J	3,6	3,5	3,6	3,6
	Efficacy at 50% (dimmed)	μmol/J	3,9	3,9	4,1	4,0
	Mains voltage <sup>2</sup>	V	277-400	277-400	277-400	400
	Control interface		CC3   WC3	CC3   WC3	CC3   WC3	CC3   WC3
Quadro Beam	Typical photon flux	μmol/s	3700	3600	4170	5050
	Power consumption (max)	W	1040	1040	1170	1408
	Efficacy @ max power	μmol/J	3,6	3,5	3,6	3,6
	Efficacy at 50% (dimmed)	μmol/J	3,9	3,9	4,1	4,0
	Mains voltage <sup>2</sup>	V	277-400	277-400	277-400	400
	Control interface		CC3   WC3	CC3   WC3	CC3   WC3	CC3   WC3

## 4-channel control

Beam	Spectral version		Deep Red/Blue/White/Far Red types <sup>1</sup>				
	Spectral code (factory-set light recipe)		RBWF				
Standard beam	Typical photon flux	μmol/s	2760	3000	3800	3900	4510
	Power consumption (max)	W	800	800	1040	1040	1170
	Efficacy @ max power	μmol/J	3,5	3,8	3,7	3,8	3,9
	Efficacy at 50% (dimmed)	μmol/J	3,8	4,2	4,1	4,2	4,2
	Mains voltage <sup>2</sup>	V	277-400	277-400	400	400	400
	Control interface		CC4   WC4	CC4   WC4	CC4   WC4	CC4   WC4	CC4   WC4
Quadro Beam	Typical photon flux	μmol/s	2760	3000	3800	3900	4510
	Power consumption (max)	W	800	800	1040	1040	1170
	Efficacy @ max power	μmol/J	3,5	3,8	3,7	3,8	3,9
	Efficacy at 50% (dimmed)	μmol/J	3,8	4,2	4,1	4,2	4,2
	Mains voltage <sup>2</sup>	V	277-400	277-400	400	400	400
	Control interface		CC4   WC4	CC4   WC4	CC4   WC4	CC4   WC4	CC4   WC4

## Quick reference data

Light distribution			Standard Beam - beam angle 120°
Color Controllable			Quadro Beam - beam angle 150x135°
			10% - 100% (controllable per channel) <sup>1</sup>
			5% - 100% (Blue channel control - 4CH version only)
Dimensions	800W 1040W / 1170W 1400W	cm cm cm	L: 58,1 W: 36,4 H: 13,0 L: 70,3 W: 36,4 H: 13,0 L: 82,5 W: 36,4 H: 13,0
Weight	800W 1040W/1170W 1400W	kg kg kg	13 15 17
Power factor			0,98
Total Harmonic Distortion		%	< 10
Rated Average Lifetime <sup>2</sup>		hrs	36.000 - Q95
Ingress protection rating			IP66 / wet locations
Cooling			Passively cooled
Approval marks			CE, ENEC, UL/CSA, RCM, PSE, IC/FCC
Mains connector			Wieland RST20i3 Green

### Legend

**DRW** = Deep Red / White  
**DRWFR** = Deep Red / White + Far Red  
**RBWF** = Deep Red/Blue/White/Far Red

**LB** = light recipe, with low blue content  
**MB** = light recipe, with medium blue content  
**VSN2** = vision spectrum, human centric white light

**FR 1** = Far Red light recipe 1 (backwards compatible setpoint product)

**FR 6** = Deep Red White light recipe including Far Red

**RBWF** = 4 channel exact control in combination with GrowWise

**PF** = Power factor

**THD** = Total harmonic distortion

### Notes

- The published value represents the total photon flux from 400-800nm
- 50 - 60 Hz
- Lifetime and maintenance values are given at an ambient temperature of 25°C / 77°F.
- In combination with GrowWise control system Version 4.0 or higher. Dimming the light output increases the efficacy of the product.



© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Document order number: 442295726068  
 04/2026 | Data subject to change

For more information about Philips Horticulture LED Solutions visit: [www.philips.com/horti](http://www.philips.com/horti)

Write us an e-mail: [horti.info@signify.com](mailto:horti.info@signify.com)

Or follow us:

Philips Horticulture LED Solutions  
 @philiphorticulture