



01

Model	3185M
Material	Stainless Steel
Function	Flow-through sterilization
Flow Rate	2L-4L
UV Power	80mW-160mW-240mW
Function	Max Flow Rate: 2L

02

Model	3185G2
Material	Stainless Steel
Function	Flow-through sterilization
Flow Rate	6L-12L
UV Power	240-320mW-400mW-480mW
Function	Max Flow Rate: 2L



03

Model	Z2
Material	POM
Function	Flow-through sterilization
Flow Rate	0.5L-2L
UV Power	80mW-160mW-240mW
Function	Max Flow Rate: 2L

04

Model	M3
Material	Stainless Steel
Function	Flow-through sterilization
Flow Rate	0.5L-2L
UV Power	80mW-160mW-240mW
Function	For use with Model 3182 Faucet



05

Model	X2
Dimensions	33*31*11cm
Net Weight	8.2kg
Power	54W
Waterproof	IPX5
Applications	Drinking Water



3185C1

Single Water Sterilization Faucet

- Blue light indication: Normal sterilization in progress
- Orange light indication: Sterilization in preparation or lamp beads need to be replaced



Reference model	ND3185C1-L2(U210)	Material	SS304
Flow rate	2L/min	UV band	265nm
Inlet water temp	4°C-38°C	E. coli sterilization rate	99.99%
Optical Power	70/80/140/160/210/240mW	Operating Voltage	12-36V
Sterilization standard	NS / ES / AS	Color	Natural Brushed / Customized

265nm

UV Band Length: 265nm (Effective Germicidal Wavelength)

99.99%

Up to 99.99% E. coli Sterilization Rate


20,000+H

UV-C LED Lamp




3185C2

Single Water Sterilization Faucet

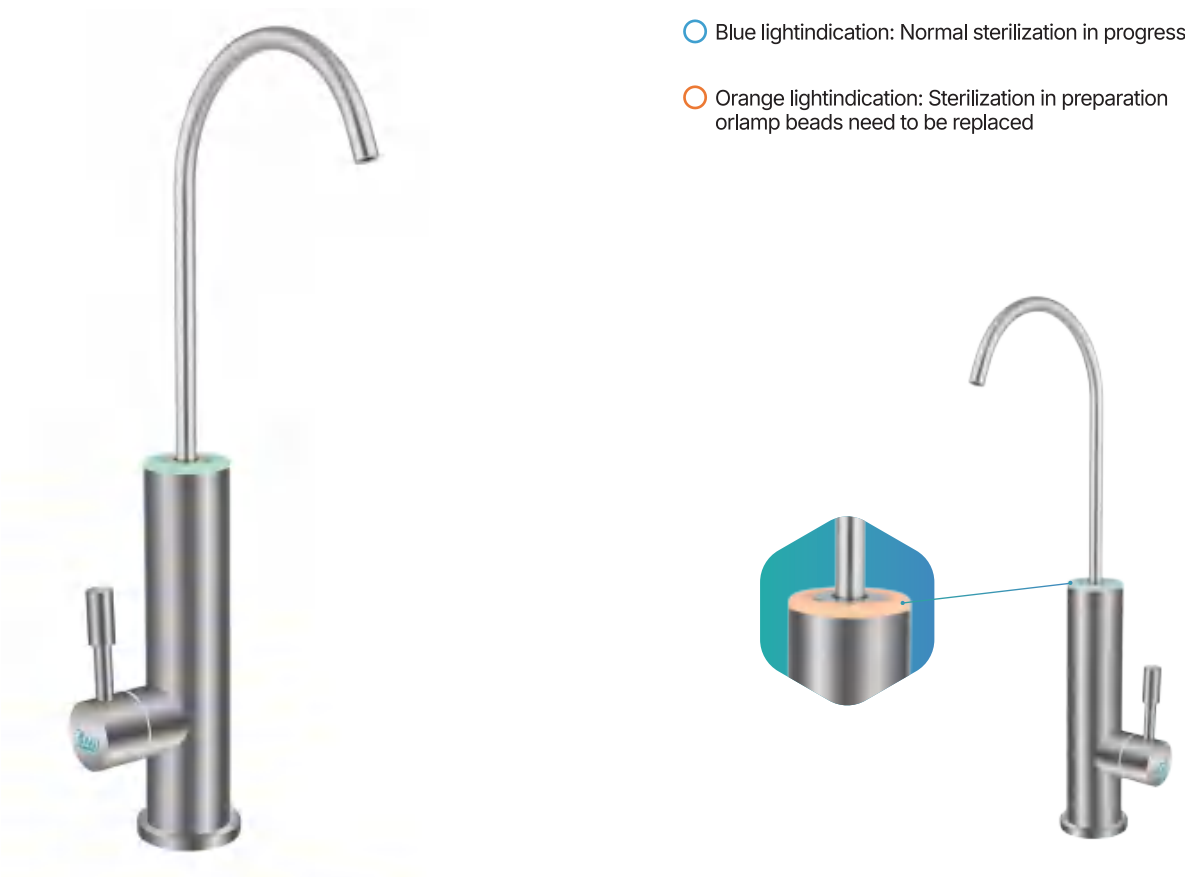

Reference model	ND3185C2-L2(U80)	Material	SS304
Flow rate	2L/min	UV band	265nm
Inlet water temp	4°C-38°C	E. coli sterilization rate	99.99%
Optical Power	70/80/140/160/210/240mW	Operating Voltage	12-36V
Sterilization standard	NS / ES / AS	Color	Natural Brushed / Customized

Separated sterilizing faucet

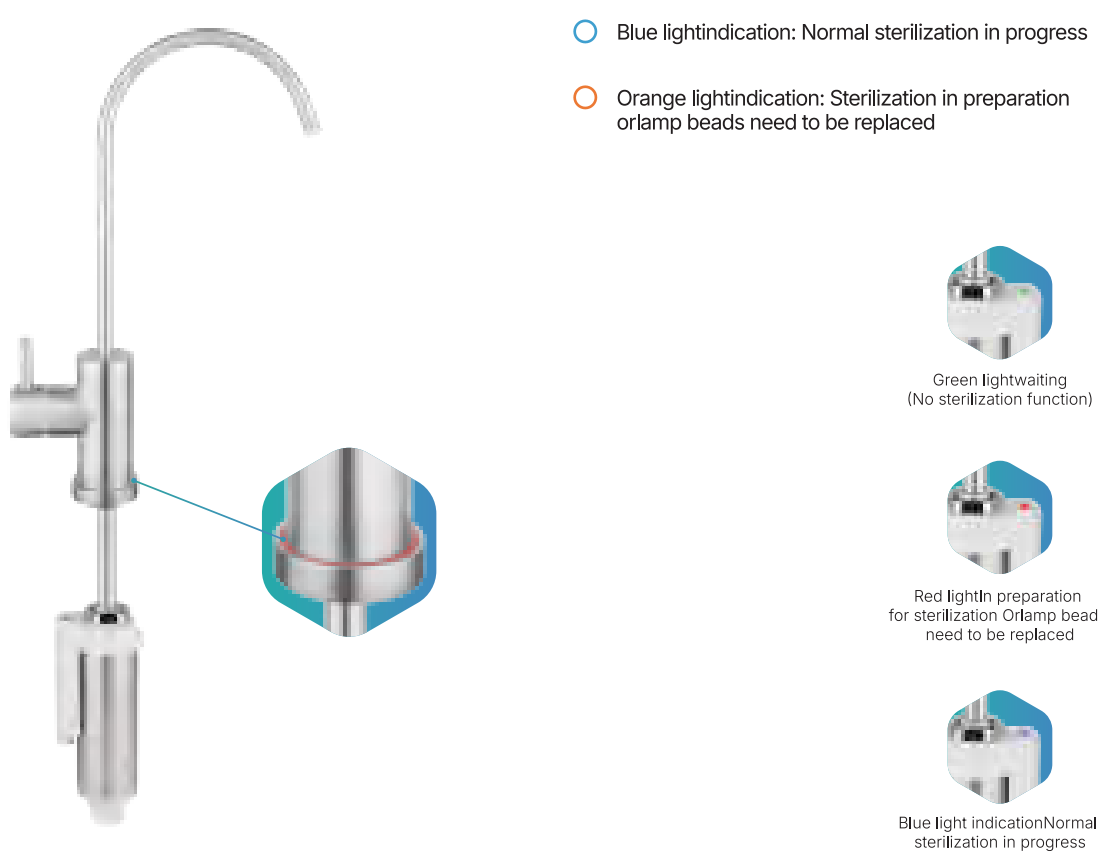

Reference model	GD3182+GD3185M3-L2(U70)	Material	SS304
Flow rate	2L/min	UV band	265nm
Inlet water temp	4°C-38°C	E. coli sterilization rate	99.99%
Optical Power	70/80mW	Operating Voltage	12-36V
Sterilization standard	CN-EU	Color	Natural Brushed / Customized



Model:3241



Model:3281




Model:3301



Model:3261

The main body is available in three shapes, with two types of handles for free matching.

Optional colors - color customization supported

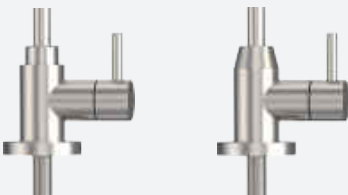

NSF-certified stainless steel faucets are available in 4 series, covering 4 sizes and 8 design styles, with a total of 19 models. All are NSF certified. We are a source factory, and provide professional OEM & ODM services.

Model Number	3241Series	3281Series	3301Series	3361Series
Main body dimensions	φ 24	φ 28	φ 30	φ 36
Main design + Handle design	 Straight type	 Stepped type	 Chamfered type	



NSF/ANSI 61 Certified Stainless Steel Faucet




AISI 304
Stainless Steel



Lead-Free



Three-way

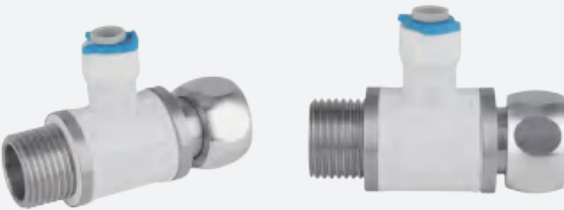

1255 Integrated 3-Way Valve

Model	V21004-01-00/V21004-03-00
Material	POM + Stainless Steel
Specification	G/2" Port: G1/2×G1/2×G1/4 3/8" Port: G1/2×G1/2×G3/8

Inlet Tee



Item No	Specification	Name
G63124601C-H	1/2"xM10x1/2"x46mm	G3/4 Union Tee
G63123400C	1/2"x1/45x1/2"x34.5mm	Four-way Tee
G63124502C	1/2"x1/4"x1/2"x45mm	Four-way Tee
G63126200C	1/2"x1/4"x1/2"x60mm	Four-way Tee



Item No	Specification	Name
G43383800C	3/8"x1/4"x3/8"x38mm	G3/8 Square Tee
G63383800C	3/8"x1/4"x3/8"x38mm	Four-way Tee
G63384500C	3/8"x1/4"x3/8"x45mm	Four-way Tee
G63385300C	3/8"x1/4"x3/8"x53mm	Four-way Tee
G63386200C	3/8"x1/4"x3/8"x62mm	Four-way Tee
G63385800C-H	3/8"x3/8"x1/4"x58mm	G3/4 Union Tee

Pressure Reducing Valve



Item No	Specification	Name
V31141400N	1/4"x1/4"	G1/4 Pressure Valvee
V31121200N	1/2"x1/2"	G1/2 Pressure Valve

SERVICE
CONTENT

- R&D
- Production
- Sales



Support OEM

- Customized appearance, structure, materials & performance
- Custom brand logo, packaging & manual printing
- Custom colors, parts, labels, anti-counterfeiting & certifications
- Neutral packaging, confidential shipment, factory-free printing
- Mass production, QC inspection & drop shipping service



ODM Available

- Factory design, mold development and R&D customization available.



Water Quality Testing

- Laboratory water quality testing available.



Warranty Service

- 1-year warranty for the main body of the sterilizer
- 10-year warranty for the UV LED sterilizing lamp beads
- Product performance guarantee