


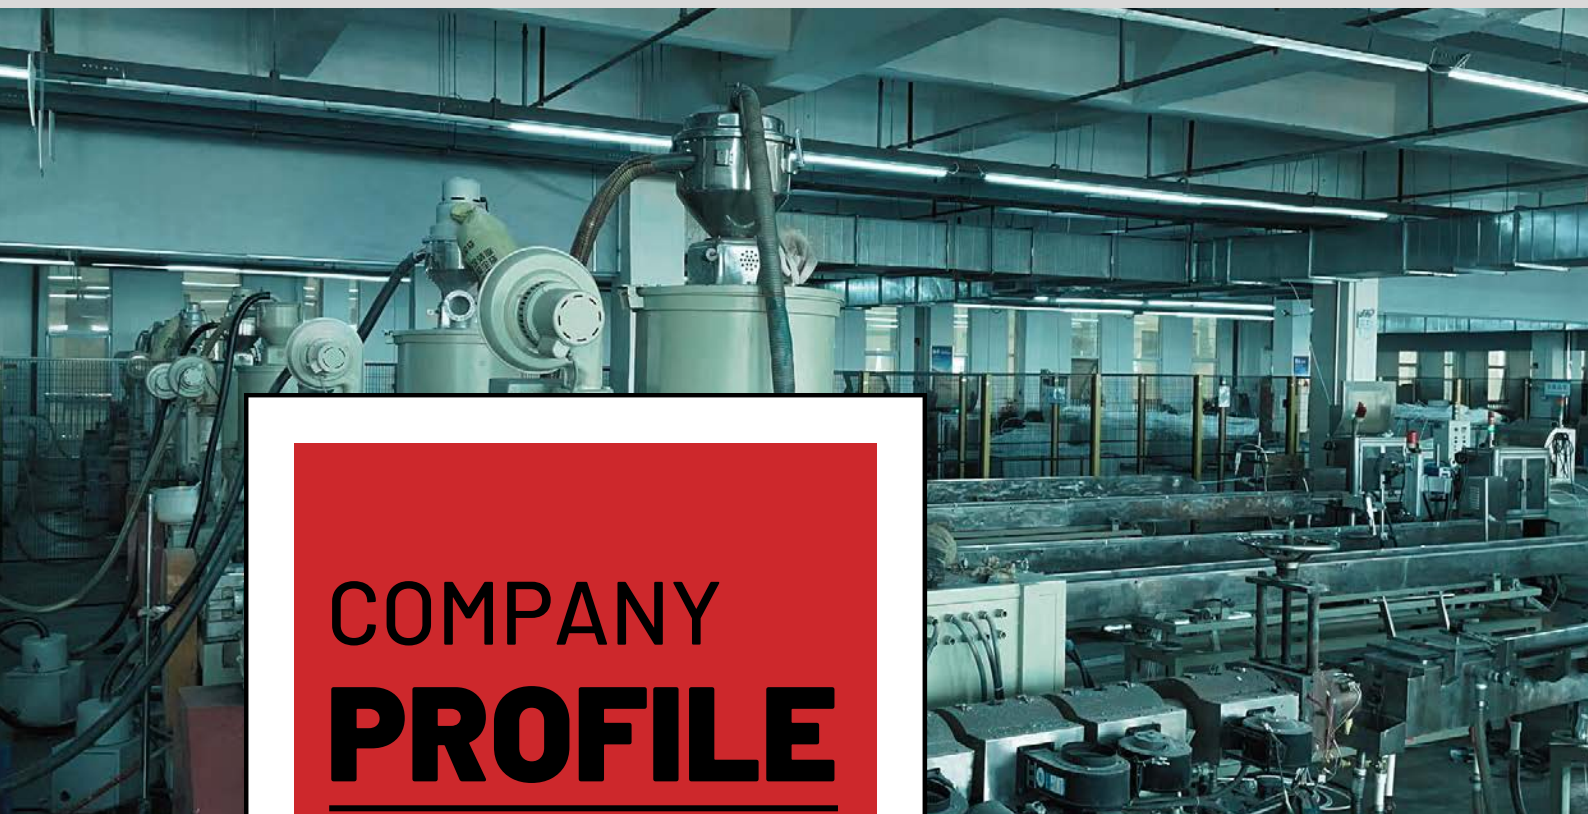

COMPANY **PROFILE**

Since 2006

Founded in 2006, **Shenzhen Taoshi Co.,LTD**, is a modern enterprise integrating R&D, design, innovation, production and service. We are committed to the innovation in water treatment technology for accessories production and R&D. Shenzhen Taoshi has more than 30000 m² of production plant and has achieved remarkable achievements in the production technology of water pipes, water storage tanks, filter housings, filter cartridges and RO membrane.

Our company has a daily production capacity of 750.000m for PE water Pipe, 10.000pcs for filter housing, 2150pcs for water storage and capacity of 150.000pcs for melt-blown PP filter cartridges. Innovation and dedication are the core values of Taoshi, while integrity is our guiding philosophy. We are committed to creating a healthier water environment for consumers, offering high-quality, safe water purification accessories, and providing efficient, reliable after-sales service. Shenzhen Taoshi will continue to move forward, collaborating closely with industry partners in the ongoing effort to preserve global water resources and protect the environment.

SHENZHEN TAOSHI CO., LTD



We take pride in adhering to the highest industry standards, ensuring that our products meet your expectations for quality and safety. Our certifications, including ISO, NSF, and other globally recognized standards, reflect our dedication to excellence, environmental responsibility, and customer satisfaction. These certifications not only validate the quality of our products but also demonstrate our commitment to maintaining sustainable and reliable practices.



The image features three white, cylindrical filter housings against a plain white background. The housing on the left is a tall, standard model with a flat top and a single port. The middle housing is also tall but has a more complex top with a side port. The housing on the right is shorter and wider, featuring a side port and a different top configuration. All three have vertical ridges on their bodies.

FILTER HOUSING

Made with durable, corrosion-resistant materials, our Filter Housing is ideal for use in water treatment systems, industrial filtration setups, and residential water filtration.



5" FEMALE THREAD TRANSPARENT FILTER

Material : Styrene Resin
Height: 167 mm, Weight: 514g
Pore Size: 1/4"

TS-H03



5" MALE THREAD TRANSPARENT FILTER

Material : Styrene Resin
Height: 170 mm, Weight: 472g
Pore Size: 1/4" 1/2"

TS-H02



10" MALE THREAD TRANSPARENT FILTER

Material : Styrene Resin
Height: 295 mm, Weight: 700g
Pore Size: 1/4" 1/2"

TS-H06



10" FEMALE THREAD TRANSPARENT FILTER

Material : Styrene Resin
Height: 295 mm, Weight: 784g
Pore Size: 1/4"

TS-H07



10" FEMALE THREAD WHITE FILTER HOUSING

Material : Polypropylene
Height: 295 mm, Weight: 843g
Pore Size: 1/4"

TS-H05



10" AMERICAN TYPE FILTER HOUSING

Material : Polypropylene
Height: 295 mm, Weight: 800g
Pore Size: 1/4" 1/2"

TS-H08



10" EUROPEAN TYPE FILTER HOUSING

Material : Polypropylene
Height: 295 mm, Weight: 710g
Pore Size: 1/4" 1/2"

TS-H09



10" MALE THREAD WHITE FILTER HOUSING

Material : Polypropylene
Height: 295 mm, Weight: 695g
Pore Size: 1/4" 1/2"

TS-H04



10" AMERICAN TYPE JUMBO FILTER HOUSING

Material : Polypropylene
Height: 340 mm, OD: 155mm, ID: 140mm
Sealing rubber: Silca gel
Water Pressure: 0.1-0.45Mpa

TS-H12



10" JUMBO FILTER HOUSING

Material : Polypropylene
Height: 330 mm, OD: 160 mm, ID: 150mm
Sealing rubber: Silca gel
Water Pressure: 0.1-0.45Mpa

TS-H10



20" JUMBO FILTER HOUSING

Material : Polypropylene
Height: 585 mm, OD: 160mm, ID: 150mm
Sealing rubber: Silca gel
Water Pressure: 0.1-0.45Mpa

TS-H11



20" AMERICAN TYPE JUMBO FILTER HOUSING

Material : Polypropylene
Height: 600 mm, OD: 155mm, ID: 135mm
Sealing rubber: Silca gel
Water Pressure: 0.1-0.45Mpa

TS-H13



20" TWO PIECES FILTER HOUSING

Material : Polypropylene
Interface: 1/2" 3/4"
Water Pressure: 0.1-0.45 Mpa

TS-H15



20" THREE PIECES FILTER HOUSING

Material : Polypropylene
Interface: 1/2" 3/4"
Water Pressure: 0.1-0.45 Mpa

TS-H16



20" FOUR PIECES FILTER HOUSING

Material : Polypropylene
Interface: 1/2" 3/4"
Water Pressure: 0.1-0.45Mpa

TS-H17



20" SINGLE FILTER HOUSING

Material : Polypropylene
Interface: 3/8" 3/4" 1/2" 1"
Water Pressure: 0.1-0.45Mpa

TS-H14



1812/2012-50,75,100 RO MEMBRANE HOUSING

Material : Polypropylene

Interface: 1/4"

Product Sealing : 2 Sealing Rings

Weight: 350g

TS-M02



3012-200-400G RO MEMBRANE HOUSING

Material : Polypropylene

Interface: 3/8"

Product Sealing : 2 Sealing Rings

Weight: 860g

TS-M03



3213-600G RO MEMBRANE HOUSING

Material : Polypropylene

Interface: 3/8"

Product Sealing : 2 Sealing Rings

Weight: 980g

TS-M06



3013-400G RO MEMBRANE HOUSING

Material : Polypropylene

Interface: 3/8"

Product Sealing : 2 Sealing Rings

Weight: 740g

TS-M05



FILTER CARTRIDGE

Our PP Filter Cartridge is made from high-quality polypropylene resin, featuring a gradual tightening structure with coarse outer fibers and fine inner fibers for effective filtration. The Carbon Filter uses premium activated carbon to remove chlorine, odors, and organic contaminants, improving water taste and quality. Both filters provide reliable and efficient performance for various water treatment applications.

40"PP FILTER CARTRIDGE

Filter Fineness: 1um / 5um
Process: Plain PP, Embossing, Needled
Size: L 1016mm, OD 60mm, ID: 28mm

TS-F07



30" PP FILTER CARTRIDGE

Filter Fineness: 1um / 5um
Process: Plain PP, Embossing, Needled
Size: L 762mm, OD 60mm, ID: 28mm

TS-F06

PP FILTER CARTRIDGE

Filter Fineness: 1um / 5um
Process: Plain PP, Embossing, Needled
Size: Customizable (5", 10", 20");(10",20" Jumbo)

TS-F01-F05





UDF FILTER

TS-F11

Size: 10" 20"

Jumbo Size: 10" 20"

Filter Material: Quality Activated Carbon

Source Temperature: 5-45°C

Water Pressure: 0.1-0.4 Mpa

CTO FILTER

TS-F12

Size: 10" 20"

Jumbo Size: 10" 20"

Filter Material: Quality Activated Carbon

Source Temperature: 5-45°C

Water Pressure: 0.1-0.4 Mpa



UDF COIR CARBON

TS-F14

Size: 10" 20"

Jumbo Size: 10" 20"

Filter Material: Coir Carbon

Source Temperature: 5-45°C

Water Pressure: 0.1-0.4 Mpa

CTO COIR CARBON

TS-F15

Size: 10" 20"

Jumbo Size: 10" 20"

Filter Material: Coir Carbon

Source Temperature: 5-45°C

Water Pressure: 0.1-0.4 Mpa



CONNECTOR SERIES



CONNECTOR



BRACKET



VALVE



CATALOG

YEAR 2025