


POD 20 Specifications


SeaDrive POD 20kW

Nominal voltage	100V DC (96V)
Operating voltage range	72-125V DC
Operating water temp. range	0-35 °C
Continuous output power	20kW
Thrust - Bollard Pull	220kgf

Speed vs. input power

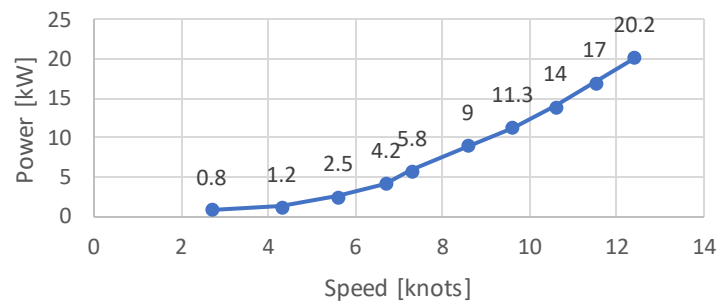

Bollard-pull vs. input power

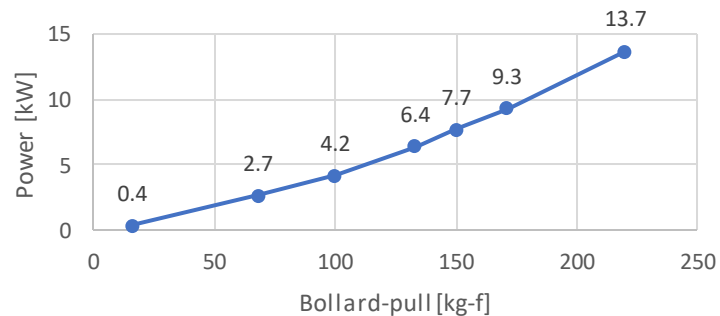

**Tested on Strana 23 (3 persons onboard)*

