

AVAILABLE APRIL 2025



Hella marine

APELO EUROLED 75 RGB/W DOWNLIGHT

- › 90 Degree lighting spread angle
- › Stainless Steel or White trim option
- › Fits standard 50mm / 2" hole.
- › Spring & Screw Mount Fitting




PRODUCT FEATURES

A downlight with no compromise to form or function, the Apelo EuroLED 75 RGB/W delivers full spectrum colour, plus bright, even, broad illumination of 150 Lumens from dedicated White LED's.

Experience infinite colour combinations when paired to the Apelo Light Controller. Customised or programmed colour light display options are endless, and able to be linked with Apelo RGB underwater lights and Apelo RGB step lamps for synchronized displays.

Single and dual colour models also available.

Apelo EuroLED 75 RGB/W downlights can be controlled with the Apelo Light Controller and companion App for iOS and Android. Personalise your lighting with the Apelo Light Controller App and unlock endless colour possibilities. Easily create custom lighting or switch between preset modes, combining convenience and creativity in every use.



Control. Group. Create.

Technical Data

Part Number	Function	Trim	Connector	Pack Qty
2JA 017 884-001	RGB/W	White	Tinned marine cable	Single
2JA 017 884-007	RGB/W	White	Tinned marine cable	Bulk (20)
2JA 017 884-207	RGB/W	White	4 Pin + 2 Pin DT	Bulk (18)
2JA 017 884-011	RGB/W	Stainless	Tinned marine cable	Single
2JA 017-884-017	RGB/W	Stainless	Tinned marine cable	Bulk (20)
2JA 017 884-217	RGB/W	Stainless	4 Pin + 2 Pin DT	Bulk (18)

Mounting	Recessed*
Cap Material	White plastic, polished 316 stainless steel
Lens Material	PC
Base Material	UV resistant enhanced impact acrylic
Operating Voltage	12V DC only (9-16V)
Lumen Light Output	150 lumen measured output (White)
Power Consumption	3W RGB / 0.25A @ 12V DC 3W White / 0.25A @ 12V DC
Connectivity	Flexible 6 wire connection. Apelo Light Controller compatible
Protection	IP6K7 & IP6K9K (Completely sealed): Suitable for submersion in operation and high pressure water jet cleaning
Cable length	120mm tinned marine cable
Connector (DT Models)	4 Pin + 2 Pin DT Connector
Compliance	  

* May be Spring or Screw mounted. When screw mounting, remove springs and ensure mounting hole is only 50mm, versus 54mm for Spring mount.

COMPATIBLE PRODUCTS

Apelo EuroLED 75 RGB/W Downlights can be controlled with the Apelo Lighting Controller and companion App for iOS and Android. Unlock endless colour possibilities, and easily create or switch between custom lighting and preset modes, as part of an integrated Apelo Ecosystem.



RGB/W Custom Animations



iOS/Android App or Switch Control




Bluetooth® Mesh Communication



Synchronised Lighting




iPhone, iOS and App Store are registered trademarks of Apple Inc.
Android and Google Play are registered trademark of Google Inc.

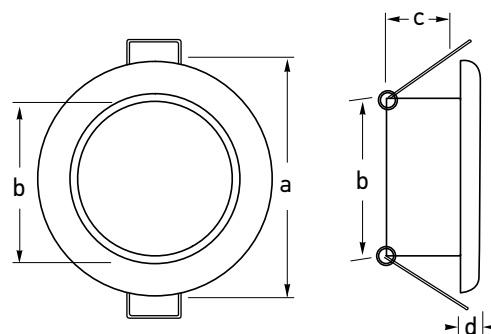


Dimensions

a = Ø75mm (3.0") Dia
b = Ø54mm (2.2") Dia hole with spring clips
Ø50mm (2.0") Dia hole for screw mount
c = 21mm (0.9")
d = 7.4mm (0.3")



EuroLED 75 RGB/W Light Cone

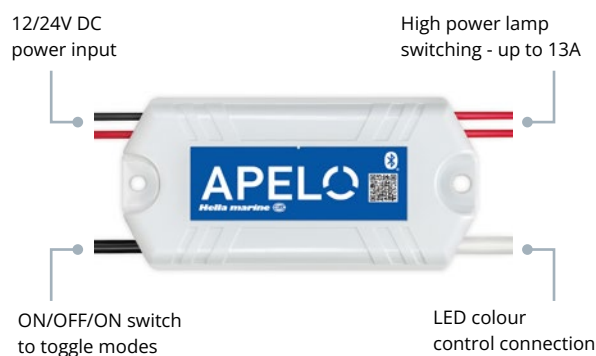

Hella marine Asia Pacific
HELLA New Zealand Ltd
81-83 Ben Lomond Crescent
Pakuranga 2010,
Auckland, New Zealand
Phone +64 9 577-0366
info@hellamarine.com

Hella marine Australia
HELLA Australia Pty Ltd
4 Hargrave Place
Mentone, Victoria 3194 Australia
Phone 1800 061 729
hellaorders@hella.com
custservice@hella.com

Hella marine USA
Hella Automotive Sales, Inc.
201 Kelly Drive
Peachtree City,
GA 30269 USA
Phone +1 770-626-2319
soe.sales@hella.com

Hella marine Europe
HELLA GmbH & Co. KGaA
Rixbecker Str. 75
59552 Lippstadt
Germany
Phone +49 29 41 38 66 44
info@hella.com