

HSE 300

PRODUCT DESCRIPTION

KG
570 KG




2x0,50 kW



25 BAR

300L

2x140 AH

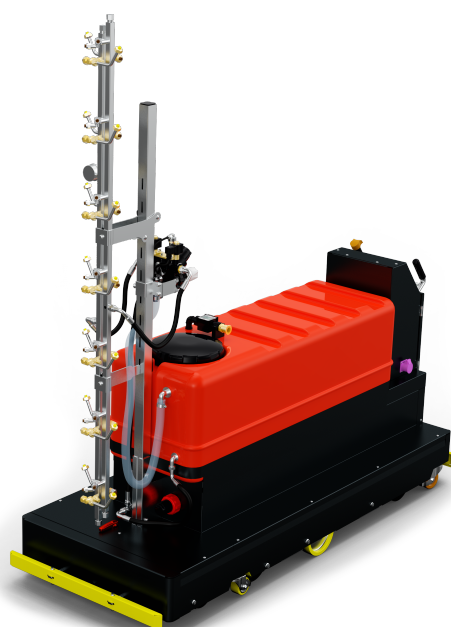

Two spraying bars up to 3m (one spraying the end of the row, the other spraying the plants on both sides) equipped with nozzle heads with the possibility of individual configuration of the spraying liquid stream. The device is equipped with a 300L tank. Entire device is controlled by a PLC controller, which allows you to set the route, speed, turn on the appropriate spray bar while driving, control over the battery charge status informing about upcoming discharge and counts the number of hours worked. Working with HSE 300 is easy and intuitive. We program the length of the sprayer's travel and the amount of liquid, and allow it to automatically run on the heating pipes and spray the plants.

A special wheels system under the device and a steering system on the back of the HSE 300 enable the trouble-free change of the rows without the use of any force. Near the control panel you will find a special traction switch that allows you to control the speed of the device in manual mode during row changes.

