

INTOPAQUA

Where Purity Flows


Pure Water, Warmth in Every Drop

RO Water Purifier with Heating Function





High Flow Rate




Dual-Core Filtration


 Optional
faucet


RO


 Removes
Bacteria & Chlorine


Automatic Self-Cleaning


 Filter Replacement
Reminder


Low Noise



Heating Function



Specifications

Item	RO-U2C1 (HOT)	RO-U2C1
Design Type	Tankless integrated: purification + heating	Tankless water purifier
Temperature Settings	45°C / 65°C / 85°C / 95°C (4 levels)	/
Filter Change Reminder	Indicator light + faucet alert	Indicator light
Product Dimensions (L×W×H)	435 × 150 × 430 mm	435 × 150 × 376 mm
Faucet Type	Electric control faucet	SS faucet / Digital display faucet (optional)
Filtration Stages	4-stage filtration: PPC composite filter + RO membrane	
Flow Rate (Optional)	600G-1200G	
Water Supply	Municipal tap water	
Feed Line Pressure	0.1-0.4 MPa	
Operating Water Temperature	5 – 38 °C	
Optional Colors	Black / White / Cool Gray	
Rated Power Supply	2220V ~ 50Hz	
Rated Total Purification Capacity	600G: 4T / 800G: 5T / 1000G: 5T / 1200G: 6T	
Application	Household	
Flow Rate	600G: 1.5 L/min 800G: 2 L/min	1000G: 2.5 L/min 1200G: 3 L/min
Rated Power	600G: 1585W 800G: 1596W	1000G: 1610W 1200G: 1620W

Take out



Horizontal Quick-Change Filter Super Easy Replacement

Step 1: Rotate the dual-core filter 90° counterclockwise, then pull it out horizontally.

Step 2: Press the filter handle with your thumb to complete the quick replacement.

Put in



Semi-transparent Cover



Opaque Cover


Optional
+ Dust Cover



Front View



Rear View

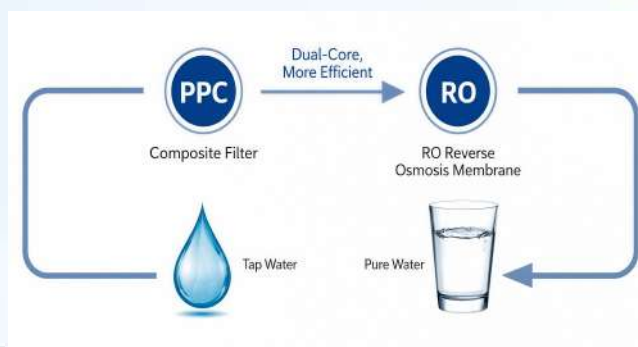

Key Features:

- Heating function available – instant hot water
- Flow rate: 600G / 800G / 1000G / 1200G optional
- Integrated quick-change design – imported RO membrane + PPC composite filter
- Multiple faucet options (Stainless Steel / Digital Display / Electronically controlled)
- Child lock & anti-dry burning protection
- Low noise – great value