





MRBF Terminal Fuse Block

BF462 / BF463

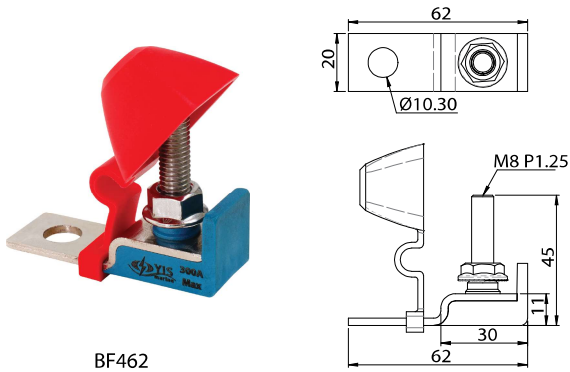

BF462

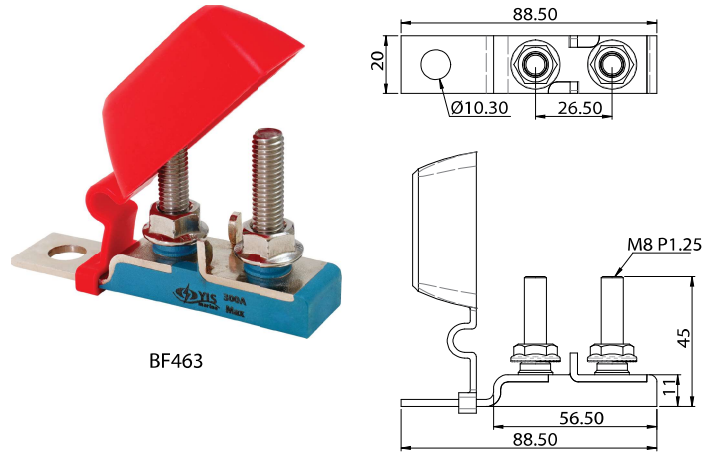


BF463

Features

- Accepts high-amp MRBF fuse—appropriate for inverter, windlass, bow thruster and DC main circuit protection
- Convenient and compact installation directly on battery studs
- Isolated stud design allowing stacking of M8 (5/16") ring terminals
- TPV Insulating cap preventing accidental shorts circuits
- Accepts M8 (5/16") ring terminals
- Mounts on M10 (3/8") terminal studs – M8 customized version also available.
- MRBF fuses not included

Specifications

- Max Operation Voltage | DC 58V
- Max Continuous Current | 30-300A (fuse dependent)
- Terminal Stud Size | M8(5/16")

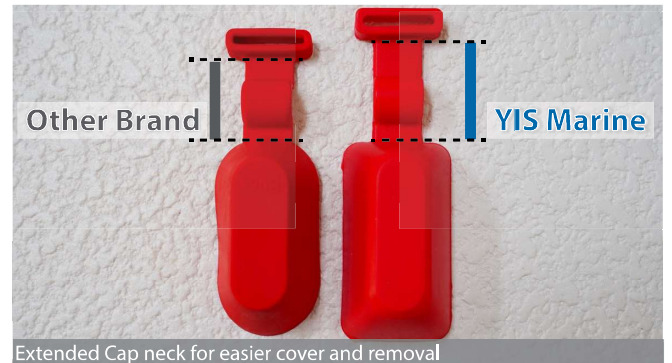

Accepts high-amp MRBF fuse

* Related Product: MRBF fuse (page 38)



Ultra soft durable TPV Material