




ECO-PA

TANKS FOR WATER TREATMENT



ECO-PA FILTERS

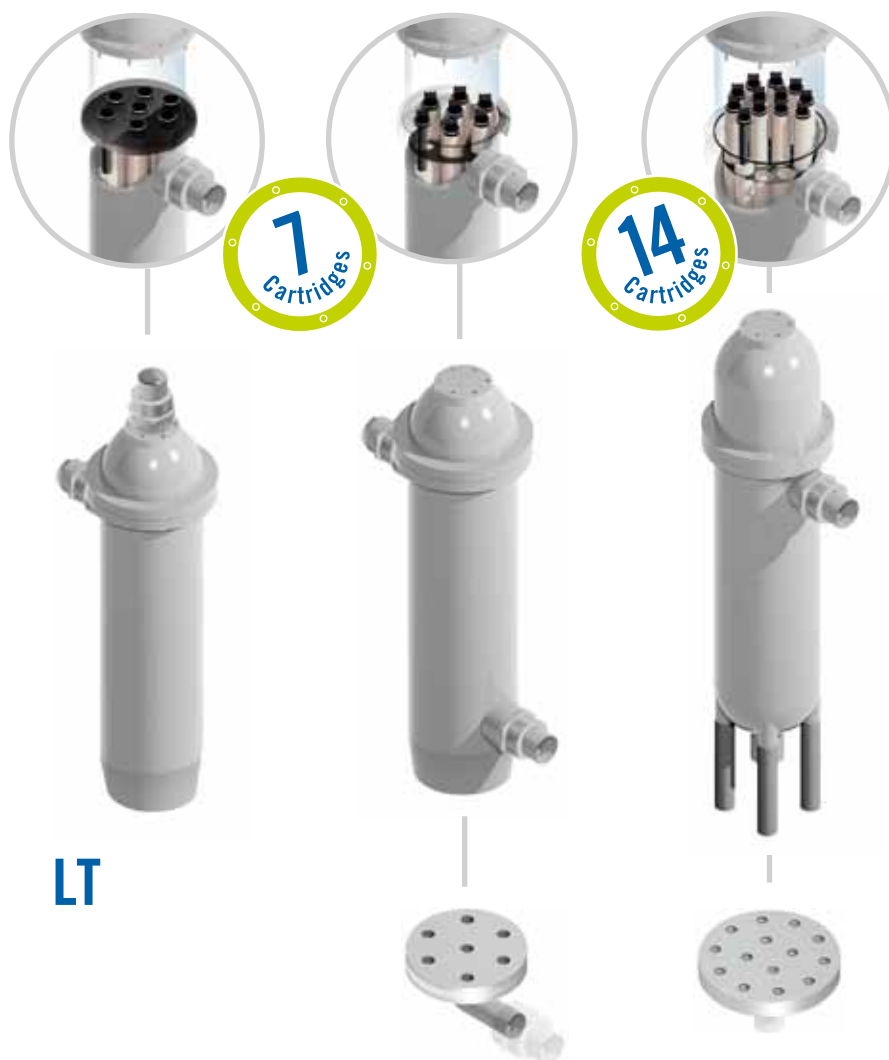

LT



Type (inches)	Flow Range	N° Cartridges	Cartridge Type	Cartridge Length	Weight (Kg)
7x20	8-11	7	20" DOE	508	26
7x30	12-16	7	30" DOE	762	27
7x40	17-22	7	40" DOE	1016	28



Type (inches)	Flow Range	N° Cartridges	Cartridge Type	Cartridge Length	Weight (Kg)
14x30	22-32	14	30" DOE	762	53
14x40	33-42	14	40" DOE	1016	54
14x50	43-56	14	50" DOE	1270	65

Customizable colors



ECO-PA TANKS



100%
Recyclable

Type (inches)	Vol. (l)	Volume Dome (l)	Weight (Kg)
16x44	100	8	25
16x65	150	8	35
18x22	58	8	25
18x72	250	8	48
21X44	177	27	33
21X62	258	27	46
24x27	135	26	31
24x34	190	26	40
24X49	268	26	51
24X64	366	26	60
24X72	412	26	65
30x31	240	64	82
30x43	375	64	95
30X49	407	64	80
30X64	561	64	90
30X72	614	64	105
36x40	470	111	100
36X49	570	111	115
36X64	766	111	135
36X72	867	111	150
42X72	1295	202	242
48X50	1700	248	264
48X74	1700	248	320
60x74	2400	450	470

Top & Bottom



Options



Connections available

- Pipe connections D63mm, or D90mm available.
- Threaded connection top 2"1/2, 4", 6"
- Slot sizes for nozzles and distributors , 0.2mm or 0.5mm.



MORE THAN **1250**
DESIGNS
(DELIVERY 2-10 DAYS)



ECO-PA

MODULAR HOUSING



HORIZONTAL



VERTICAL

Also available for HFU, Nozzle plate or others

Cartridges Type DOE	N° Cartridges*	Flow Range* m³/h
30"	21-45	30 - 95
40"	21-45	50 - 130
50"	21-45	63 - 160


*to be adjusted to plant requirements.
Measures in mm

Cartridges Type DOE	N° Cartridges*	Flow Range* m³/h
30"	21-45	30 - 95
40"	21-45	50 - 130
50"	21-45	63 - 160

*to be adjusted to plant requirements.
Measures in mm

ECO-PA

BAGS

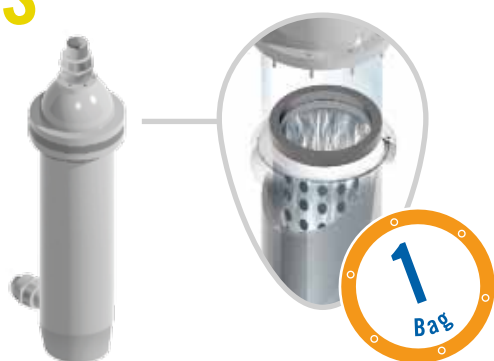

Flow: 20 m³ / hour
N° Bags: 1
Bag Type: O- RING Ø 180 mm, L810 mm
Weight: 26 kg
Measures in mm

Flow: 80 m³/hour
N° Bags: 4
Bag Type: O-Ring Ø 180 mm, L 810 mm
Weight: 51 kg
Measures in mm

ECO-PA VESSELS

Flange Top Threaded
4" 8UN or 2" 1/2 8NPSM
Pressure vessels (10 bar)

Optional Done
Opening



ECO-PA PH

2" 1/2 8NPSM
Portable pressure vessels (10 bar)
with handles.



Type (inches)	8x15	8x17	8x23	8x35	10x23	10x35	10x43	10x49	13x35	13x50
Vol. (l)	8,5	9,4	14,3	22,4	22,1	35,3	44,7	50,3	60	94,3
D (mm)	204	204	204	204	257	257	257	257	346	346

Top & Bottom available under request.

ECO-PA PLUS

10 bar pressure tanks for water treatment.
Threaded [Top] 4" 8UN or 2" 1/2 8NPSM connection.

Optional Done
Opening

Type (inches)	Vol. (l)	D (mm)
14 x 65	123	350
16 x 44	100	391
16 x 65	150	391
18 x 72	250	465
21 x 62	258	522
24 x 72	412	595
30 x 72	614	746



Customizable colors



OUR HISTORY



35
years

Researching
Innovating
Developing

SANITARY

REGISTRO AGENCIA ESPAÑOLA

DVGW Technical Standart W270 - Filter Nozzle



ECO-PA ATTESTATION CONFORMITÉ SANITAIRE (ACS)

EUROPEAN DRINKING WATER DIRECTIVE



REGISTRE SANITARI D'INDUSTRIES

ATTESTATION DE CONFORMITÉ SANITAIRE (ACS) - Filter Nozzle



PRESSURE

CONFORMITY WITH THE EUROPEAN PRESSURE EQUIPMENT

QUALITY AND MANAGEMENT SYSTEM

CERTIFICATE OF PEVASA QUALITY ISO 9001:2008



ECO-PA

TANKS FOR WATER TREATMENT

Material properties

Polyamide 6
Melting point: 220°
Tensile Strength: 82 N/mm2
Flexural Strength: 3300 N/mm2
Recyclable by depolymerisation 100%
Internal liner of ethylene acid copolymer

Working conditions

Working Pressure: 10,5 bar / 150 psi
Vacuum Resistant
Maximum working temperature: 50 °C
Minimum burst pressure: 42 bar / 600 psi
Safety factor 4:1

2 YEARS
WARRANTY

DELIVERY
DAYS **2-10**



PRODUCTOS ESTRATIFICADOS
DE VIDRIO, S.A.

C/ Almeria, 31
08226 Terrassa (Barcelona)
España

Tel. (+34) 93 731 27 29
Fax (+34) 93 731 44 04

MORE INFO:

info@pevasa.com



Member of:

