

# Blickfeld Qb2



## Smart 3D LiDAR with on-device processing for intelligent and customizable sensing solutions

Qb2 is an integrated smart LiDAR that allows capturing and processing of 3D data on a single device. By incorporating Blickfeld's cutting-edge technologies and research, customers benefit from an intuitive and cost-effective system while drastically simplifying installation and operation in various use cases.

## TECHNICAL DATA

### PERFORMANCE

<b>Technology</b>	3-dimensional laser ranging (LiDAR) with edge processing	
<b>Maximum field-of-view</b> <sup>a</sup>	90° x 50° (horizontal x vertical) <sup>a</sup>	
<b>Typ. application range</b> <sup>b</sup>	1 - 100 m	
<b>Coverage</b> <sup>a</sup>	Installation height, tilt angle	Coverage (width x depth)
	3 m / 9.8 ft, 30°	15 x 12 m / 49.2 x 39.4 ft
	5 m / 16.4 ft, 30°	28 x 22 m / 91.9 x 72.2 ft
	10 m / 32.8 ft, 35°	35 x 28 m / 115 x 91.9 ft
	15 m / 49.2 ft, 40°	41 m x 28 m / 135 x 91.9 ft
	20 m / 65.6 ft, 40°	56 m x 45 m / 184 x 148 ft
<b>Typical range precision (1 sigma)</b>	< +2 cm	
<b>Frame rate</b>	1 – 50 Hz depending on configured scan pattern	
<b>Number of returns</b>	3	
<b>Vertical resolution</b>	2 – 400 scan lines per frame <sup>c</sup> (user-configurable)	
<b>Horizontal resolution</b>	0.25°, 0.5°, 0.75° (user-configurable)	

### LASER

<b>Laser class</b>	Class 1, eye-safe (IEC 60825-1:2014)
<b>Laser wavelength</b>	Infrared, 905 nm
<b>Laser beam divergence</b>	0.25° x 0.25°


### ON-DEVICE SOFTWARE AND OUTPUT DATA

<b>Integrated web interface</b>	Interactive 3D LiDAR point cloud visualization, device configuration and setup, output specification, data recording
<b>Central processing unit</b>	Broadcom Quad-core (ARM v8) 64-bit, 1.5 GHz
<b>Perception software</b>	Object detection and tracking, 3D zones for occupancy detection, volume monitoring, intrusion detection, and exclusion
<b>Blickfeld Flow</b>	Low-code programming interface based on Node-RED
<b>Integrated inertial measurement unit (IMU)</b>	TDK InvenSense ICM-20600
<b>LiDAR data</b>	Cartesian coordinates and Intensity per return, timestamp per acquisition
<b>IMU data</b>	3 axis accelerometer

### OPERATIONAL

<b>Dimensions (H x W x D)</b> <sup>d</sup>	Ca. 75 mm x 111 mm x 83 mm
<b>Weight</b> <sup>d</sup>	Ca. 535 g
<b>Voltage input</b>	Power over Ethernet (PoE), IEEE 802.3at Type 1
<b>Ingress protection</b> <sup>e</sup>	IP67 (IEC 60529)
<b>Operating ambient temperature</b> <sup>f</sup>	-30 °C ... +60 °C
<b>Storage temperature</b>	-40 °C ... +60 °C
<b>Conformity marks / compliance</b>	CE, UKCA, REACH, FDA, FCC, SRRC TAA-compliant product variants available upon request

## DIMENSIONS

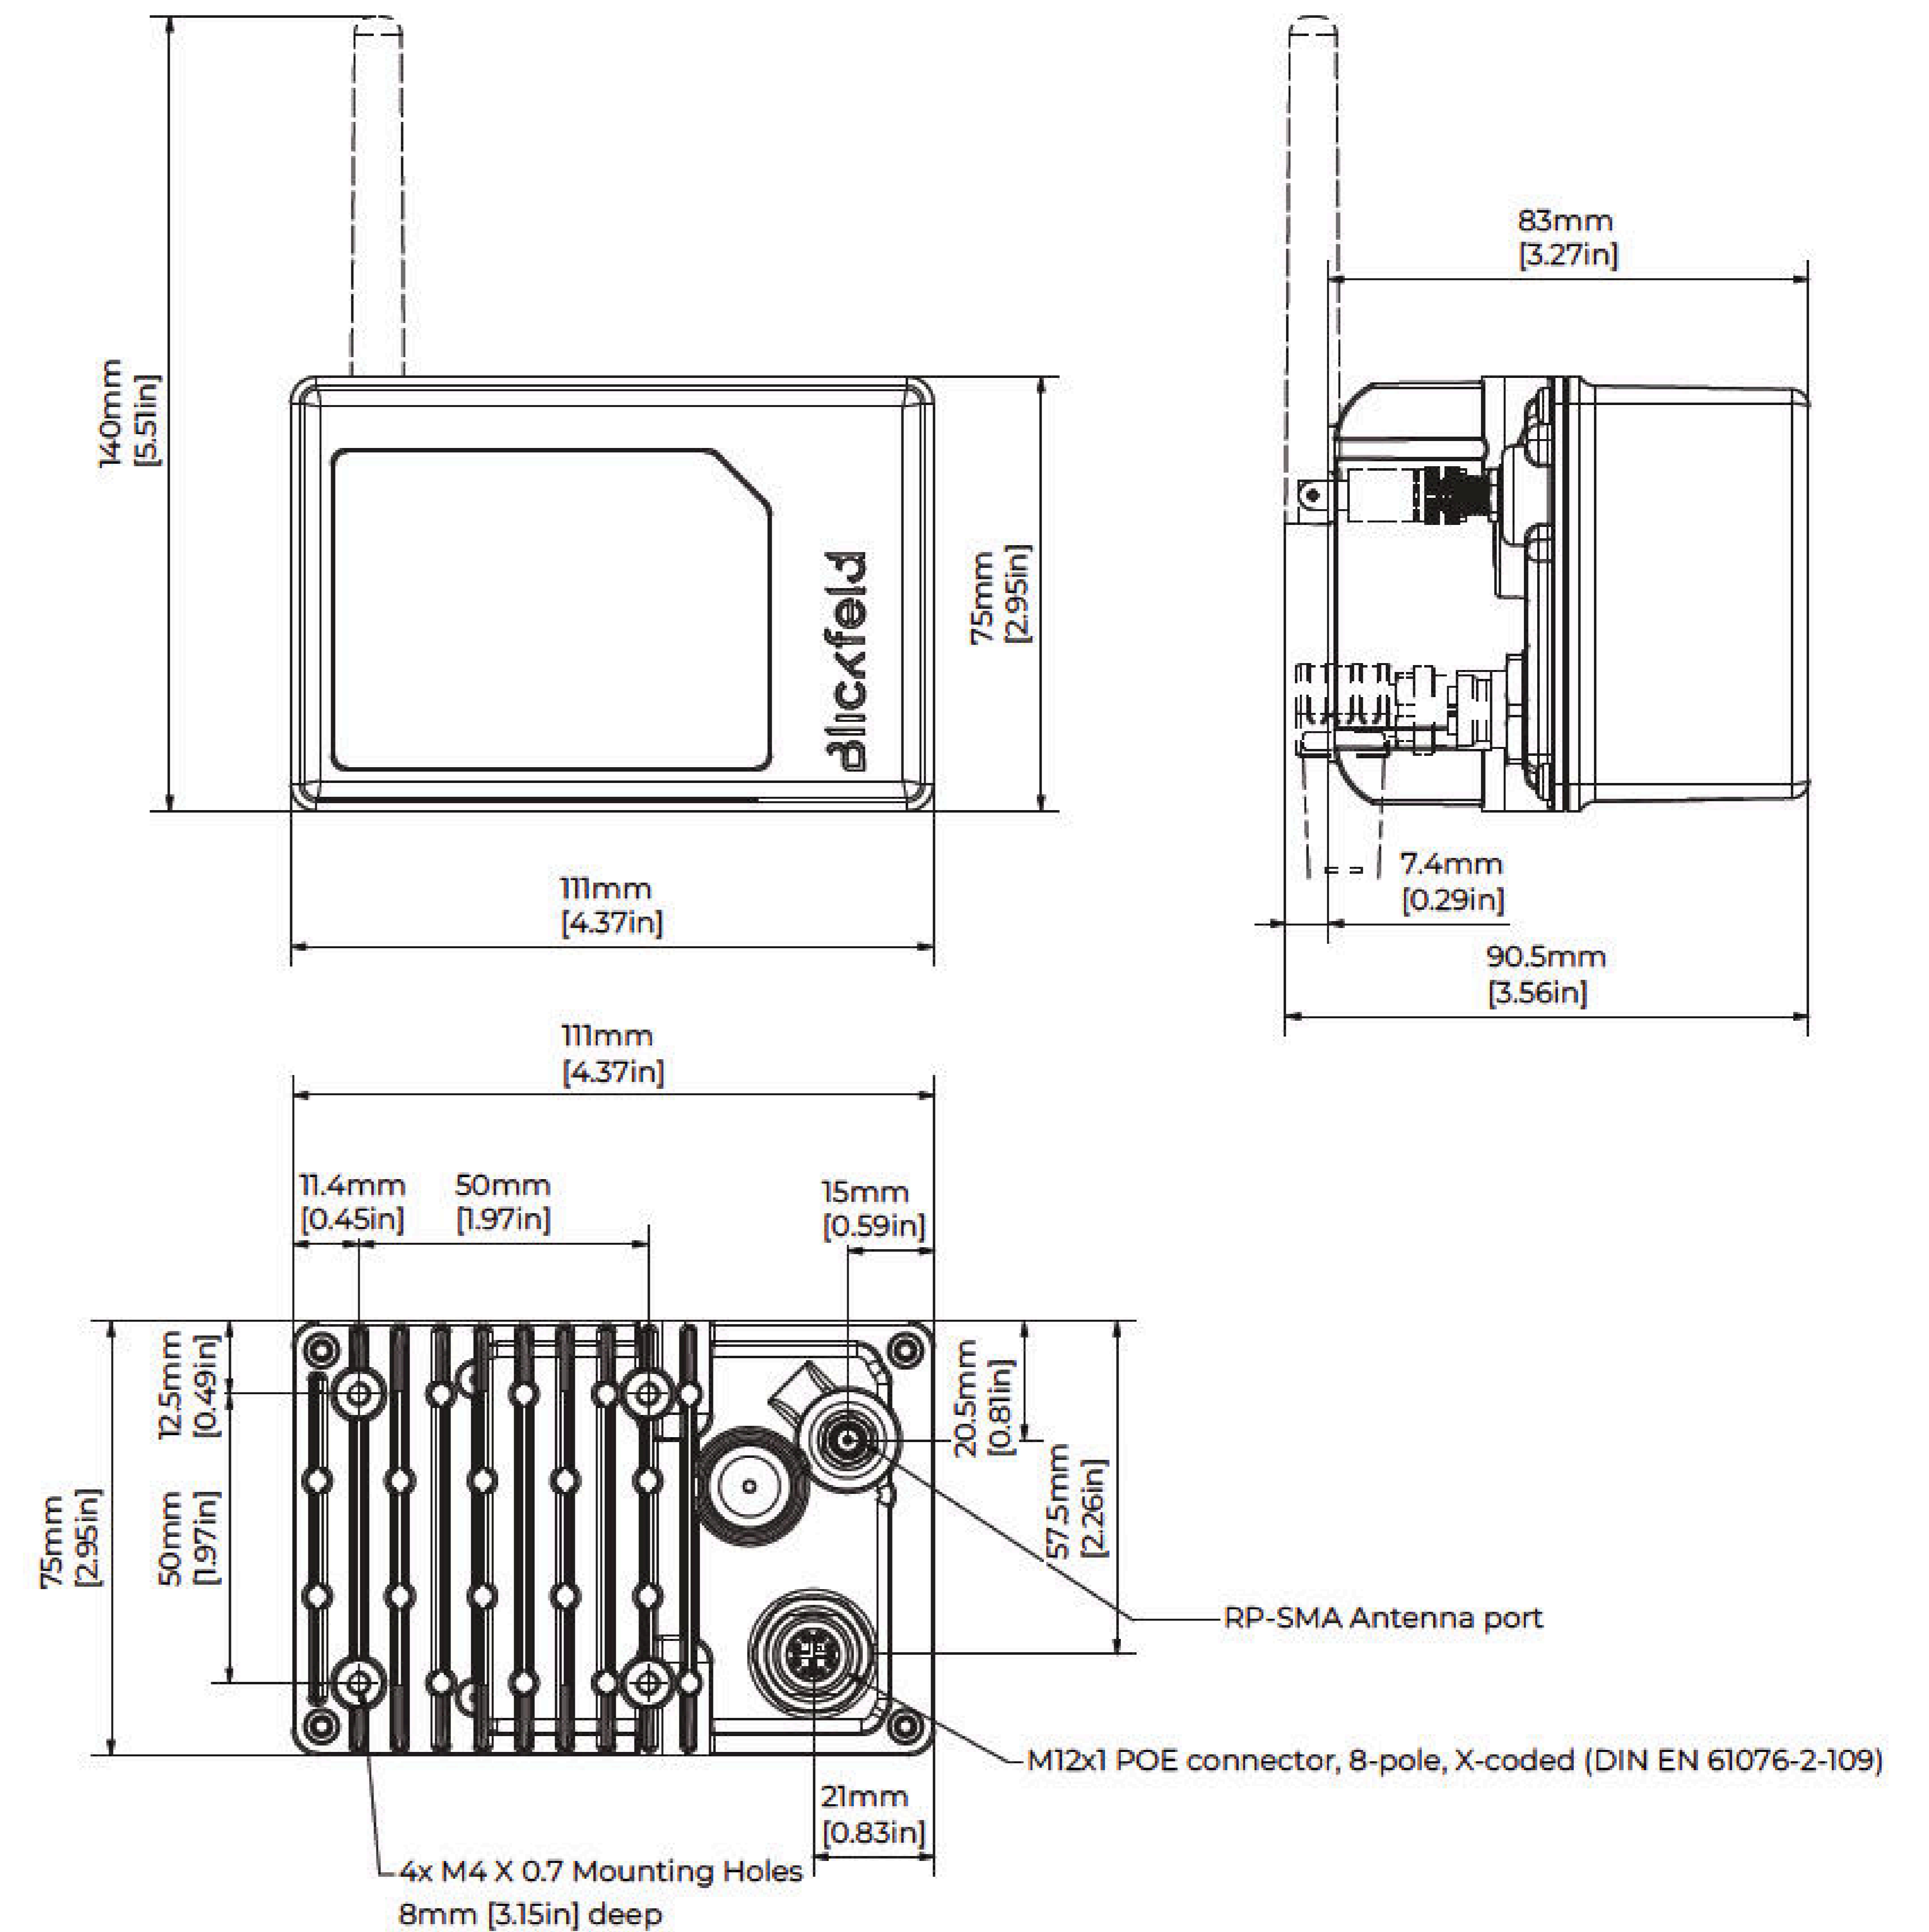

values in brackets are calculated and may contain round-off errors

INTERFACES	
<b>LAN connection</b>	Ethernet 1000 Base-T (1 Gbit/s)
<b>WiFi connectivity</b>	2.4 GHz: IEEE 802.11b/g/n
<b>Ethernet connector</b>	M12x1 Industrial Ethernet connector, 8-pole, X-coded (EN 61076-2-109), IP67 <sup>g</sup>
<b>Mounting</b>	Back side: 4x M4 tapped holes
<b>Security</b>	User & API-key authentication (multiple access levels, read-only access), 802.1X & WPA2 (EAP)
<b>Protocols</b>	ARP, ICMP, DHCP, DNS, TLS, 802.1X, UDP, NTP, IPv4, IPv6, TCP/IP, HTTP, HTTPS, gRPC, MQTT

ACCESSORIES	
<b>Antenna</b>	Matching WiFi antenna (included). WiFi operation only permitted with Blickfeld-authorized antenna.
<b>Cable</b>	Matching Ethernet cable, length: 3 / 7 / 10 m. M12x1 Industrial Ethernet connector to RJ45, straight, Cat. 6a, X-coded, 8-pole, UV-resistant, halogen-free, PUR jacket
<b>Mounting</b>	Pan-tilt mounting bracket
<b>Add-on</b>	Weather protection roof

- a Non-rectangular field-of-view
- b Range performance depends on many factors including but not limited to object reflectivity, orientation, surface texture, ambient light level, and ambient temperature. Reduced accuracy and resolution in small areas of the field of view in close distance to the sensor.
- c Less than 35 scan lines requires reduced field-of-view
- d Without antenna or cables attached
- e With antenna and Ethernet cable attached or with protective caps attached
- f Continuous operation between -37°C and 60°C. Increased start-up time (max. 30 min) for temperatures below -30°C
- g IP67 with cable and protective cap attached