

# Concrete Surface Preparation Machine



上海启亨机械有限公司  
Shanghai Qiheng Machinery Co., Ltd.  
盐城亚速利地坪机械有限公司  
Yancheng Yasuli Machinery Co., Ltd.

上海市嘉定区江桥镇金园三街256号8楼  
No. 256, 3rd Jinyuan Road, Jiangqiao, Jading District, Shanghai, 201803 China  
江苏省盐城市滨海县科技产业园四号路81号  
No. 81, 4th Road Science and Technology Park, Binhai county, Yancheng, Jiangsu province, China  
TEL: +86-21-39556371 39556372 FAX: +86-21-69029155  
URL: www.asl.cn www.asl-machine.com  
E-mail: asl\_tw@hotmail.com tw-asl@hotmail.com  
咨询热线 (Hot Line): 400-892-8288

## 专业地坪研磨系统

## Professional Floor System

2024年八月版

Version | Aug. 2024

本公司产品有多项专利，请勿模仿，仿冒必究

# Contents

## 目录

### 02 • 企业篇

- 公司概况

### 04 • 产品篇

- ASL-GR2-A 驾驶型研磨机
- ASL 行星式铣刨机PFS620
- ASL-RT9A 乘坐式研磨机
- ASL-RT8 自走式研磨机
- ASL-T9 地坪研磨机
- ASL-T7 地坪研磨机
- ASL-T2 地坪研磨机
- ASL-T1B 地坪研磨机
- ASL-T27 高速抛光机
- ASL-T25 修边机
- ASL 乘坐式洗地机
- ASL V7500 吸尘器
- ASL V3600 吸尘器
- ASL T21 抛光机
- ASL-GR2-B 驾驶型研磨机
- ASL行星式铣刨机PFS500
- ASL-RT9B 乘坐式研磨机
- ASL-RT1 遥控研磨机
- ASL-T8 地坪研磨机
- ASL-T6 地坪研磨机
- ASL-T1A 地坪研磨机
- ASL-T20 高速抛光机
- ASL-T330 小型研磨机
- ASL 洗地机
- ASL 乘坐式洗地机
- ASL V4000 吸尘器

### 30 • 辅料篇

- 研磨机特殊配件
- 研磨抛光材料
- 研磨抛光材料

## PRODUCT PROFILE 产品概况

### R系列机器：

齿轮箱采用全铝合金制箱体，全新结构设计，四头对转双运行传动，研磨效果全新升级，提高施工效率的同时进一步提高施工标准。R系列设备是地坪施工领域的一次技术革新，它大大的缩短了施工工期，节省了人工成本，同时研磨效果也非常好。除此之外，R系列设备的双电机系统，遥控或者乘坐系统，使操作更灵活，施工更轻便，节约劳动力。

### T系列机器：

也称为手推式地坪研磨机，包括行星系列研磨机和方形系列研磨机两种。

1. 行星系列机器的齿轮箱采用全铝合金箱体，更利于散热。全行星齿轮传动结构，研磨过程中平整度良好，表面细腻，均匀度优，划痕易修复；
2. 方形系列机器的齿轮箱采用全铝合金箱体，全齿轮传动，交叉对转的运动方式，可抵消纵向和横向的牵引力；
3. 所有T系列机器，都包含以下优势：

使用折叠式手柄及分离式机身设计，搬运更便捷。配U型把手，360°旋转定位，操作更舒适。

- 自动调节水平系统，平整度好，操作更平衡；
- 机器带有集尘口装置，可干、湿两种工作模式，满足不同施工需求；

- 分离式配重铁，可根据地面的软硬自行调整添加；

**高速抛光系列机器：**操作简单，轻巧方便，抛光效率高，效果好。

高速抛光机需要与药水一起使用，把地板打磨的非常光亮，或者保证地面染色效果均匀。该设备适用于固化地坪、耐磨地坪、硬化地坪、水磨石地坪、水泥自流坪、环氧地坪、无机水泥等各种混凝土地坪。

### T25：全球首款最小行星齿轮研磨机

全新齿轮箱结构设计，体型小巧，操作便捷，边角研磨更全面，研磨效果显著。

### G系列机器：

G系列研磨机是专为大面积施工而设计。它是高科技设备，可以由发电机或电力供电，由遥控或驾驶系统操作该设备。G系列机器安装了最新技术的齿轮箱，保证机器在大面积施工过程中仍具有良好的研磨和抛光效果。此外，它可以被拆分为三个部分进行长途运输，或由发电机驱动进行短途运输。

### R-series Machine:

Remote or Ride-on High-tech Floor Grinders. It is running by our new-tech planetary aluminum gearbox with 4 plates. Both grinding and polishing effect reach a new level with this totally new technology. R-series machine is a technological innovation in the flooring construction industry, flooring construction industry, which greatly shortens the workable time, saves labor costs, also guarantees the grinding and polishing effect. What's more, remote system or ride on operating system and dual motor driving system help operator to run it very easily.

### T-series Machine:

Hand-push Floor Grinders, including two types of floor grinders - the planetary floor grinders and cross-running floor grinders.

1. Planetary floor grinders are running by aluminum planetary gearbox, which makes the machine to remove the scratches very easily and ensure to grind and polish the floor very flat and smooth. Aluminum gearbox is much easier to get heat dissipation, which guarantees the service life of the gearbox.

2. Square floor grinder is running by aluminum cross-running gearbox, which cancel out the vertical and horizontal traction for easier pushing the machine to work in various flooring.

3. Both T-series machines have the same design as below:

· U-shaped handle bar with 360° positioning and adjustable handle make the operation easily and more comfortable;

· The folding handle and detachable head make the transportation much easier.

· With auto-Leveling system, T-series machine could grind the floor very flat and the operation is more balanced;

· With dust port connection and water tank, T-series machine could grind and polish the floor by wet or dry to meet different working requirements;

· Additional weight could be added or removed to change the head pressure for different hardness flooring;

High Speed Floor Polisher: Easy to operate, Lightweight, Polishing floor very shining.

It is used with chemicals to make the floor very shining or dyeing the floor in a good color result. It could be applied to various concrete flooring, like polished concrete, hardened concrete floor, wear-resistant floor, cement self-leveling floor, terrazzo, inorganic cement flooring and epoxy.

T25: The 1st Smallest Planetary gearbox floor grinder in the world T25 is running by new-tech aluminum gearbox, which is very small, easy to transport and operate. What's more, it is very close to the wall for edge grinding and the grinding and polishing effect is very good too.


### G-series Machine:

G-series machine is designed for big project. It is high technology machine which could be powered by generator or electricity and operated by remote or ride-on system. G-series machine is installed the new-tech gearbox to guarantee the machine to grind and polish the floor with good result in a big project. Also, it could be driven by generator for a short distance transportation or separated into three part for long-distance transportation.

02 | 03

企业篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

COMPANY

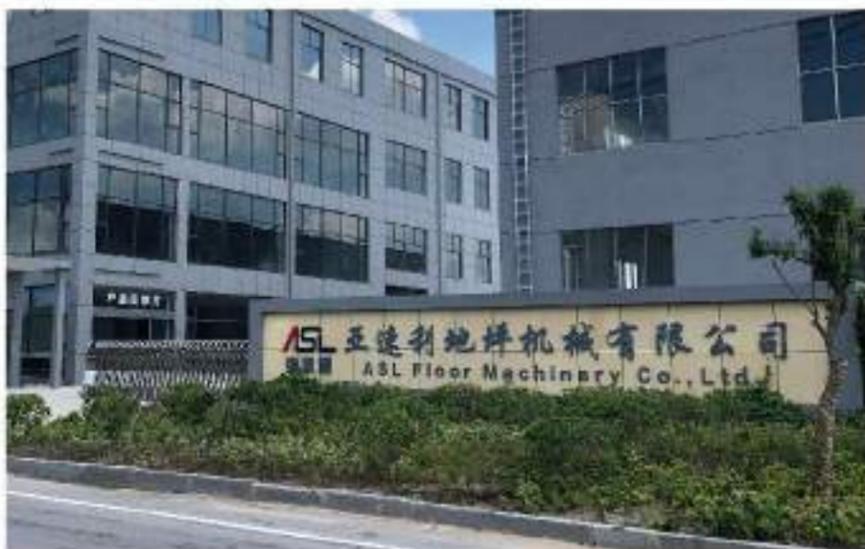

## COMPANY PROFILE 公司概况

上海启亨机械有限公司是我国专业生产亚速利地坪工程机械和地坪表面处理材料的制造厂商，自台湾公司创立十多年来，在中国公司一直秉承“以质为本，信誉第一”的经营理念，以其强大的品牌、严谨的技术创新和热情的服务优势，努力为全球各地用户提供尽善尽美的地坪研磨机械和材料。

近年来，亚速利致力于提高产品品质，加强品牌意识，加大技术创新，不断的为客户提供优质的设备和服务。目前，已受到广大国际市场的肯定。在当前地坪表面处理和养护工程“节省时间与成本”的概念下，本公司投入巨额资金研发出新一代混凝土、石材研磨机和施工材料。

产品销售美国、加拿大、澳大利亚、西班牙、法国、巴西、韩国、马来西亚、南非...等三十多个国家，涵盖世界各大洲。

您的满意，我们的追求！亚速利以其专业强大的技术团队，把顾客的需求放在第一位，定能为您提供专业的地坪表面处理知识和指导。

SHANGHAI QIHENG MACHINERY CO., LTD. is specialized in producing the high standard floor grinder and polisher equipment. Under 10 years manufacturing and renovating, our brand ASL has been well know both in domestic and global surface market. we thrives on developing floor surface preparation equipment to be high quality, time-saving and cost-efficient.

Our products has sold to the market of USA, Canada, Australia, Spain, France, Brazil, Korea, Malaysia, South Africa, etc.

Our slogan is "Our credit relies on good quality and consideratr services". Customers' satisfaction and trust is always our pursuit. We will strive to meet various customes' requirements in the rapidly developing market.

04 | 05

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

### ASL-GR2-A 驾驶型研磨机 1350mm Ride-on Floor Grinding Machine



#### 技术参数

型号(MODEL):	GR2-A	ELECTRIC MOTOR 电动机	驱动电机功率(DRIVE MOTOR POWER)	0.75KWx2	
电压(VOLTAGE):	3x380-440V		提升电机功率(LIFT MOTOR POWER)	2.2KW	
电机(MOTOR):	7.5KWx2		发电机电压(GENERATOR VOLTAGE/OUTPUT)	380-440V/220-240V	
变频器(INVERTER):	25HP(18.5KW)		发电机功率(GENERATOR POWER)	30KW	
调频(FREQUENCY):	50/60HZ		发电机油箱(GENERATOR OIL TANK)	37L	
转速(DISC SPEED):	0-1500rpm		发电机冷却箱(GENERATOR COOLING BOX)	7L	
工作面积(GRINDING WIDTH):	1350mm		VACUUM CLEANER 吸尘器	电压(VOLTAGE)	380V/60Hz
磨盘(DISC DIAMETER):	315mmX6			功率(POWER)	5.5KW
行驶速度(MOVING-SPEED):	1-15m/min			吸力(MAX.VACUUM)	3000mmAq
长宽高(DIMENSION):	1800x2600x1350mm			风量(MAX.AIRFLOW)	530m <sup>3</sup> /h
机头重量(NOSE WEIGHT):	550KG	重量(WEIGHT)		260kg	
机身重量(BODY WEIGHT):	950KG	尺寸(DIMENSION)		1000x600x1700	
整机重量(NET WEIGHT):	1500KG	吸口直径(HOSE)	50/70mm		
		电机型号(MOTOR TYPE)	Dry/Wet		
		噪音值(NOISE)	75dB		

### ASL-GR2-B 驾驶型研磨机 1350mm Ride-on Floor Grinding Machine



#### 技术参数

型号(MODEL):	GR2-B	ELECTRIC MOTOR 电动机	电池电压; DC48V	
电压(VOLTAGE):	3X380-440		电池容量; 150AH	
电机(MOTOR):	11Kw*2		电机; 1.5KW*2	
变频器(INVERTER):	25KW		行走速度; 0-17m/min	
调频(FREQUENCY):	0-55Hz			
转速(DISC SPEED):	0-1500RPM			
机头宽度(GRINDING WIDTH):	1350mm	VACUUM CLEANER 吸尘器	电压(VOLTAGE)	380-440V
左右滑动距离(SLIDING DISTANCE):	400mm		功率(POWER)	5.5KW
磨盘(DISC DIAMETER):	315mm*6		吸力(MAX.VACUUM)	320mbar
行驶速度(MOVING-SPEED):	0-17M/min		风量(MAX.AIRFLOW)	550m <sup>3</sup> /h
长宽高(DIMENSION):	1620x2331x1350mm		吸口直径(HOSE)	60/70mm
整机重量(NET WEIGHT):	1320KG		电机型号(MOTOR TYPE)	Dry/Wet
机头重量(NOSE WEIGHT):	620KG		噪音值(NOISE)	75dB
机身重量(BODY WEIGHT):	700KG			

06 | 07

产品篇

SHANGHAI

Qiheng Machinery Co., Ltd.

## ASL 行星式铣刨机PFS620

Planetary Floor Scarifier Machine




### 技术参数

型号(MODEL):	PFS620
电压(VOLTAGE):	380-440V
电流(CURRENT):	35A
电机(MOTOR):	18.5KW(22HP)
调频(FREQUENCY):	50/60HZ
转速(DISC SPEED):	1800rpm
工作面积(GRINDING WIDTH):	620mm
磨盘(DISC DIAMETER):	230mmx4
去除厚度(CUTTING DEPTH):	0.5mm-8mm
行走速度(MOVING SPEED):	0-15m/min
长宽高(DIMENSION):	1930X1050X1460mm
重量(WEIGHT):	995KG

## ASL行星式铣刨机PFS500

Planetary Floor Scarifier Machine

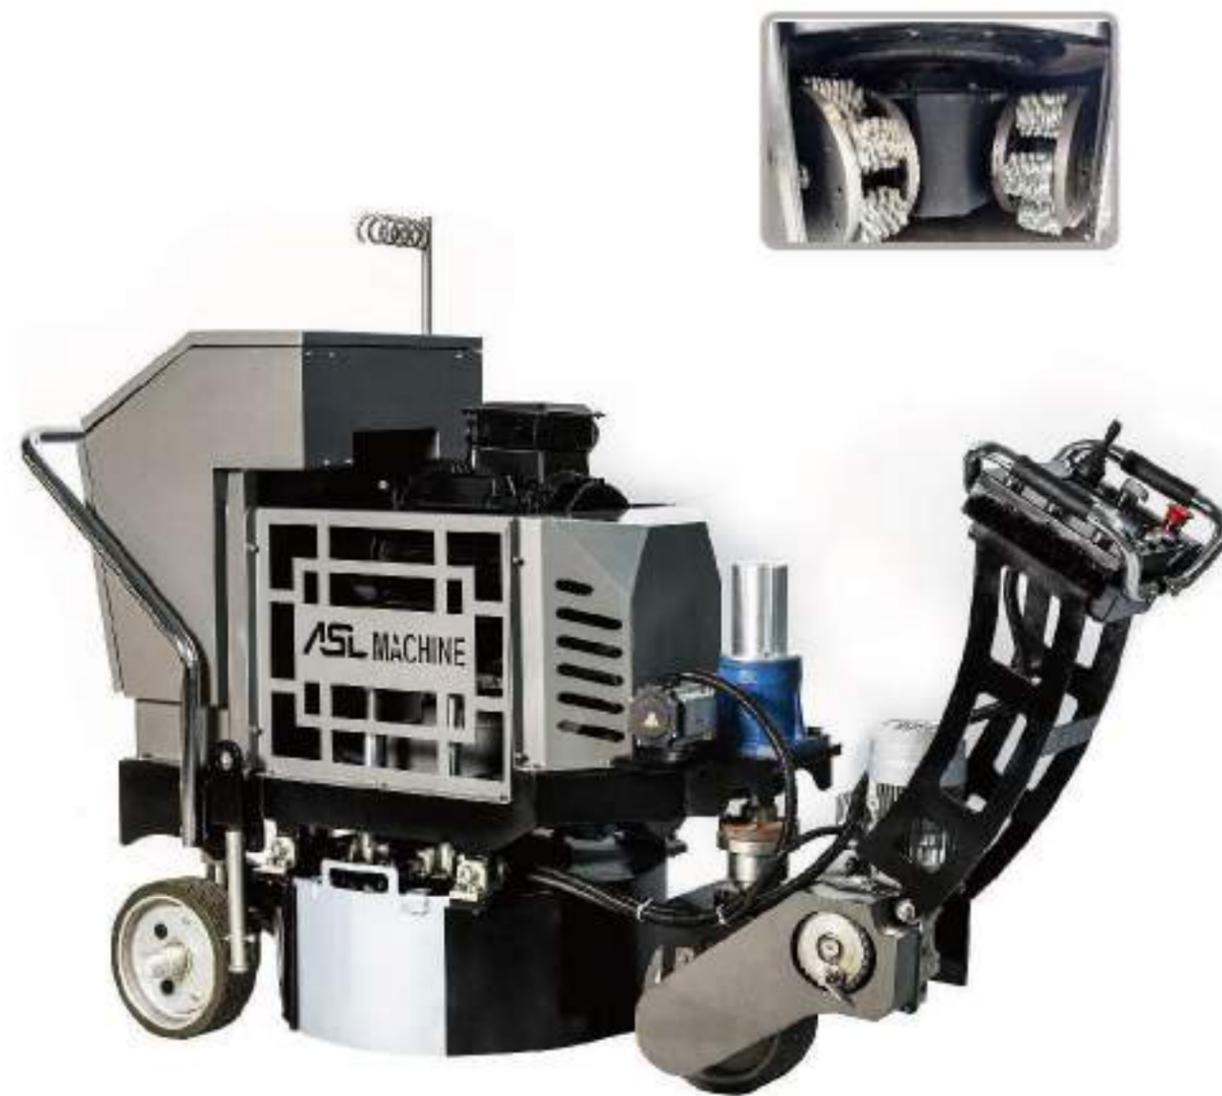

### 技术参数

型号(MODEL):	PFS500
电压(VOLTAGE):	380-440V
电流(CURRENT):	21A
电机(MOTOR):	11Kw(15HP)
调频(FREQUENCY):	50/60HZ
转速(DISC SPEED):	1500rpm
工作面积(GRINDING WIDTH):	500mm
磨盘(DISC DIAMETER):	190mmx4
去除厚度(CUTTING DEPTH):	0-6mm
行走速度(MOVING SPEED):	0-15M/min
长宽高(DIMENSION):	1600x600x1300mm
重量(WEIGHT):	630KG

08 | 09

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

**ASL-RT9A 乘坐式研磨机**  
800mm Ride-on Floor Grinding Machine



可选配遥控器  
Remote system is an extra option.

技术参数

型号(MODEL):	RT9A
遥控(REMOTE):	√
自走(SELF-PROPELLED):	√
电压(VOLTAGE) / 电池(BATTERY)24V:	3x380-440V
电流(CURRENT):	35A
电机(MOTOR):	20HP(15KW)
变频器(INVERTER):	25HP(18.5KW)
调频(FREQUENCY):	50/60HZ
行走电机(WALKING MOTOR):	0.40KWx2
转速(DISC SPEED):	0-1200rpm
工作面积(GRINDING WIDTH):	800mm
磨盘(DISC DIAMETER):	280mmX4
水箱(WATER TANK):	--
行驶速度(MOVING-SPEED):	1-15m/min
长宽高(DIMENSION):	1680x950x1700mm
重量(WEIGHT):	620KG

**ASL-RT9B 乘坐式研磨机**  
800mm Ride-on Floor Grinding Machine



技术参数

型号(MODEL):	RT9B
遥控(REMOTE):	√
自走(SELF-PROPELLED):	√
电压(VOLTAGE) / 电池(BATTERY)24V:	3x380-440V
电流(CURRENT):	35A
电机(MOTOR):	20HP(15KW)
变频器(INVERTER):	25HP(18.5KW)
调频(FREQUENCY):	50/60HZ
行走电机(WALKING MOTOR):	0.40KWx2
转速(DISC SPEED):	0-1200rpm
工作面积(GRINDING WIDTH):	800mm
磨盘(DISC DIAMETER):	280mmX4
水箱(WATER TANK):	--
行驶速度(MOVING-SPEED):	1-15m/min
长宽高(DIMENSION):	1680x950x1700mm
重量(WEIGHT):	600KG

10 | 11

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

### ASL-RT8 自走/遥控式研磨机

800mm Self-Propelled/Remote Floor Grinding Machine

手推自走一体机  
Hand-Push and Self-Propelled Machine



### ASL-RT1 遥控研磨机

750mm Remote Floor Grinding Machine



电机罩子为选配，需要产生额外费用  
Notice, water cap is not included to standard model, It is an extra choice

#### 技术参数

型号(MODEL):	RT8
遥控(REMOTE):	√
自走(SELF-PROPELLED):	√
电压(VOLTAGE):	3x380-440V
电流(CURRENT):	35A
电机(MOTOR):	20HP(15KW)
变频器(INVERTER):	25HP(18.5KW)
调频(FREQUENCY):	50/60HZ
行走电机(WALKING MOTOR):	0.37KWx2
转速(DISC SPEED):	0-1200rpm
工作面积(GRINDING WIDTH):	800mm
磨盘(DISC DIAMETER):	280mmX4
水箱(WATER TANK):	25L
行驶速度(MOVING-SPEED):	1-15m/min
长宽高(DIMENSION):	1530x930x1510mm
重量(WEIGHT):	570KG

#### 技术参数

型号(MODEL):	RT1-A1	RT1-A2	RT1-B1	RT1-B2
遥控(REMOTE):	√	√	√	√
自走(SELF-PROPELLED):	√	√	√	√
电压(VOLTAGE):	3x380-440V	3x220-240V	3x380-440V	3x220-240V
电流(CURRENT):	22.5A	38.9A	22.5A	38.9A
电机(MOTOR):	15HP(11KW)	15HP(11KW)	15HP(11KW)	15HP(11KW)
变频器(INVERTER):	15HP(11KW)	15HP(11KW)	15HP(11KW)	15HP(11KW)
调频(FREQUENCY):	50/60HZ	50/60HZ	50/60HZ	50/60HZ
行走电机(WALKING MOTOR):	0.37KWx2	0.37KWx2	0.37KWx2	0.37KWx2
转速(DISC SPEED):	0-1200rpm	0-1200rpm	0-1200rpm	0-1200rpm
工作面积(GRINDING WIDTH):	750mm	750mm	750mm	750mm
磨盘(DISC DIAMETER):	250mmX3	250mmX3	250mmX3	250mmX3
水箱(WATER TANK):	40L	40L	40L	40L
行驶速度(MOVING-SPEED):	1-10m/min	1-10m/min	1-10m/min	1-10m/min
长宽高(DIMENSION):	1530x880x1400mm	1530x880x1400mm	1530x880x1400mm	1530x880x1400mm
重量(WEIGHT):	450KG	450KG	450KG	450KG

12 | 13

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

**ASL-T9 地坪研磨机**  
750mm Floor Grinding Machine



电机罩子为选配，否则产生额外费用  
Notice, water cap is not included to standard model. It is an extra choice

技术参数		
型号(MODEL):	<b>T9-A1</b>	<b>T9-A2</b>
电压(VOLTAGE):	380-440V	220-240V
电流(CURRENT):	22.5A	38.9A
电机(MOTOR):	15HP(11KW)	15HP(11KW)
变频器(INVERTER):	15HP(11KW)	15HP(11KW)
调频(FREQUENCY):	50/60HZ	50/60HZ
转速(DISC SPEED):	0-1500rpm	0-1500rpm
工作面积(GRINDING WIDTH):	750mm	750mm
磨盘(DISC DIAMETER):	245mmX3	245mmX3
水箱(WATER-TANK):	30L	30L
长宽高(DIMENSION):	1330x880x1310mm	1330x880x1310mm
重量(WEIGHT):	340KG	340KG

**ASL-T8 地坪研磨机**  
650mm Floor Grinding Machine



电机罩子为选配，否则产生额外费用  
Notice, water cap is not included to standard model. It is an extra choice

技术参数					
型号(MODEL):	<b>T8-A1</b>	<b>T8-A2</b>	<b>T8-B1</b>	<b>T8-B2</b>	
电压(VOLTAGE):	380-440V	220-240V	380-440V	220-240V	
电流(CURRENT):	15.6A	26.9A	15.6A	26.9A	
电机(MOTOR):	10HP(7.5KW)	10HP(7.5KW)	10HP(7.5KW)	10HP(7.5KW)	
变频器(INVERTER):	15HP(11KW)	15HP(11KW)	15HP(11KW)	15HP(11KW)	
调频(FREQUENCY):	50/60HZ	50/60HZ	50/60HZ	50/60HZ	
转速(DISC SPEED):	0-1500rpm	0-1500rpm	0-1500rpm	0-1500rpm	
工作面积(GRINDING WIDTH):	650mm	650mm	650mm	650mm	
磨盘(DISC DIAMETER):	245mmX3	245mmX3	245mmX4	245mmX4	
水箱(WATER-TANK):	30L	30L	30L	30L	
长宽高(DIMENSION):	1180x730x1310mm	1180x730x1310mm	1180x730x1310mm	1180x730x1310mm	
重量(WEIGHT):	295KG	295KG	312KG	312KG	

14 | 15

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

### ASL-T7 地坪研磨机 550mm Floor Grinding Machine



电机罩子为选配，磨盘产生额外费用  
Notice, water cap is not included to standard model, It is an extra choice

#### 技术参数

型号(MODEL):	T7-A	T7-B	T7-C
电压(VOLTAGE):	380-440V	220-240V	380-440V
电流(CURRENT):	8.6A	20.2A	11.7A
电机(MOTOR):	5.5HP(4KW)	7.5HP(5.5KW)	7.5HP(5.5KW)
变频器(INVERTER):	5HP(3.7KW)	10HP(7.5KW)	10HP(7.5KW)
调频(FREQUENCY):	50/60HZ	50/60HZ	50/60HZ
转速(DISC SPEED):	0-1620rpm	0-1620rpm	0-1620rpm
工作面积(GRINDING WIDTH):	550mm	550mm	550mm
磨盘(DISC DIAMETER):	230mmX3	230mmX3	230mmX3
水箱(WATER-TANK):	30L	30L	30L
长宽高(DIMENSION):	1130x630x1310mm	1130x630x1310mm	1130x630x1310mm
重量(WEIGHT):	200KG	240KG	240KG

### ASL-T6 地坪研磨机 460mm Floor Grinding Machine



电机罩子为选配，磨盘产生额外费用  
Notice, water cap is not included to standard model, It is an extra choice

#### 技术参数

型号(MODEL):	T6
电压(VOLTAGE):	220-240V
电流(CURRENT):	15.2A
电机(MOTOR):	5.5HP(4KW)
变频器(INVERTER):	5HP(3.7KW)
调频(FREQUENCY):	50/60HZ
转速(DISC SPEED):	0-1620rpm
工作面积(GRINDING WIDTH):	460mm
磨盘(DISC DIAMETER):	200mmX3
水箱(WATER-TANK):	30L
长宽高(DIMENSION):	1130x630x1310mm
重量(WEIGHT):	180KG

16 | 17

产品篇

SHANGHAI

Qiheng Machinery Co., Ltd.

### ASL-T2 地坪研磨机

500mm Floor Grinding Machine



### ASL-T1A 地坪研磨机

600mm Floor Grinding Machine



电机罩子为选配，购买产生额外费用  
Notice, water cap is not included in standard model, it is an extra choice

#### 技术参数

型号(MODEL):	T2-A	T2-B
电压(VOLTAGE):	380-440V	220-240V
电流(CURRENT):	8.8A	15.2A
电机(MOTOR):	5.5HP(4KW)	5.5HP(4KW)
变频器(INVERTER):	5HP(3.7KW)	5HP(3.7KW)
调频(FREQUENCY):	50/60HZ	50/60HZ
转速(DISC SPEED):	0-1620rpm	0-1620rpm
工作面积(GRINDING WIDTH):	520mm	520mm
磨盘(DISC DIAMETER):	272mmX2	272mmX2
水箱(WATER-TANK):	20L	20L
长宽高(DIMENSION):	980x630x1100mm	980x630x1100mm
重量(WEIGHT):	150KG	150KG

#### 技术参数

型号(MODEL):	T1-A1	T1-A2
电压(VOLTAGE):	380-440V	220-240V
电流(CURRENT):	15.6A	26.9A
电机(MOTOR):	10HP(7.5KW)	10HP(7.5KW)
变频器(INVERTER):	10HP(7.5KW)	10HP(7.5KW)
调频(FREQUENCY):	50/60HZ	50/60HZ
转速(DISC SPEED):	0-1800rpm	0-1800rpm
工作面积(GRINDING WIDTH):	600mm	600mm
磨盘(DISC DIAMETER):	310mmX4	310mmX4
水箱(WATER-TANK):	30L	30L
长宽高(DIMENSION):	1130x680x1310mm	1130x680x1310mm
重量(WEIGHT):	280KG	280KG

18 | 19

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

### ASL-T1B 地坪研磨机 700mm Floor Grinding Machine



电机罩子为选配，磨削产生粉尘用  
Notice, water cap is not included to standard model. It is an extra choice

#### 技术参数

型号(MODEL):	T1-B1	T1-B2
电压(VOLTAGE):	380-440V	220-240V
电流(CURRENT):	22.5A	38.9A
电机(MOTOR):	15HP(11KW)	15HP(11KW)
变频器(INVERTER):	15HP(11KW)	15HP(11KW)
调频(FREQUENCY):	50/60HZ	50/60HZ
转速(DISC SPEED):	0-1800rpm	0-1800rpm
工作面积(GRINDING WIDTH):	700mm	700mm
磨盘(DISC DIAMETER):	370mmX4	370mmX4
水箱(WATER-TANK):	30L	30L
长宽高(DIMENSION):	1130x680x1310mm	1130x680x1310mm
重量(WEIGHT):	380KG	380KG

### ASL-T20 高速抛光机 510mm High Speed Polishing Machine



#### 技术参数

型号(MODEL):	T20-A	T20-B
电压(VOLTAGE):	380-440V	220-240V
电流(CURRENT):	8.8A	15.2A
电机(MOTOR):	5.5HP(4KW)	5.5HP(4KW)
变频器(INVERTER):	5HP(3.7KW)	5HP(3.7KW)
调频(FREQUENCY):	50/60HZ	50/60HZ
转速(DISC SPEED):	0-1800rpm	0-1800rpm
工作面积(GRINDING WIDTH):	510mm	510mm
磨盘(DISC DIAMETER):	510mmX1	510mmX1
长宽高(DIMENSION):	1130x580x1180mm	1130x580x1180mm
重量(WEIGHT):	80KG	80KG

20 | 21

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

### ASL-T27 高速抛光机

690mm High Speed Polishing Machine



### ASL-T330 小型研磨机

330mm Single-disc Floor Grinding Machine



#### 技术参数

型号(MODEL):	T27-A	T27-B
电压(VOLTAGE):	380-440V	220-240V
电流(CURRENT):	15.6A	26.9A
电机(MOTOR):	10HP(7.5KW)	10HP(7.5KW)
变频器(INVERTER):	15HP(11KW)	15HP(11KW)
变频(FREQUENCY):	50/60HZ	50/60HZ
转速(DISC SPEED):	0-1800rpm	0-1800rpm
工作面积(GRINDING WIDTH):	720mm	720mm
磨盘(DISC DIAMETER):	690mmX1	690mmX1
长宽高(DIMENSION):	1330x830x1150mm	1330x830x1150mm
重量(WEIGHT):	140KG	140KG

#### 技术参数

型号(MODEL):	T330-A	T330-B
电压(VOLTAGE):	380-440V	220-240V
电流(CURRENT):	5.1A	8.8A
电机(MOTOR):	3HP(2.2KW)	3HP(2.2KW)
变频器(INVERTER):	3HP(2.2KW)	3HP(2.2KW)
变频(FREQUENCY):	50/60HZ	50/60HZ
转速(DISC SPEED):	0-1500rpm	0-1500rpm
工作面积(GRINDING WIDTH):	330mm	330mm
长宽高(DIMENSION):	880x400x1120mm	880x400x1120mm
重量(WEIGHT):	65KG	65KG

22 | 23

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

## ASL-T25 修边机

260mm Edge Grinding Machine



## ASL 洗地机

Floor Scrubber



### 技术参数

型号(MODEL):	T25-A	T25B
电压(VOLTAGE):	220V	48V
电流(CURRENT):	3.6A	6.2A
电机(MOTOR):	2HP(1.5KW)	2HP(1.5KW)
变频器(INVERTER):	3HP(2.2KW)	
频率(FREQUENCY):	50/60HZ	
转速(DISC SPEED):	0-1400rpm	0-1400rpm
工作面积(GRINDING WIDTH):	260mm	260mm
磨盘(DISC DIAMETER):	100x3mm	100mmx3
长宽高(DIMENSION):	780x380x1050mm	780x380x1050mm
重量(WEIGHT):	92KG	116KG

### 技术参数

型号(MODEL):	A	B
电瓶能量(BATTERY):	--	2x12V/120ah
工作宽度(WORKING WIDTH):	510mm	510mm
工作效率(WORKING MOTOR):	1750m <sup>2</sup> /h	1750m <sup>2</sup> /h
洗地刷马达(BRUSH MOTOR):	560w	560w
吸水马达(SUCTION MOTOR):	450w	450w
洗地刷压力(BRUSH PRESSURE):	26kg	26kg
洗地刷速度(BRUSH SPEED):	250rpm	250rpm
吸水扒宽度(SQUEEGEE WIDTH):	750mm	750mm
洗地刷直径(BRUSH DIAMETER):	510mm	510mm
清水箱容量(SOLUTION TANK CAPACITY):	50L	50L
污水箱容量(RECOVERY TANK CAPACITY):	55L	55L
噪音(NOISE):	68dB	68dB
长宽高(DIMENSION):	1230x680x1050mm	1230x680x1050mm
重量(WEIGHT):	86kg	96kg

24 | 25

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

ASL 乘坐式洗地机  
530mm Ride-on Floor Scrubber



ASL 乘坐式洗地机  
850mm Ride-on Floor Scrubber



技术参数

型号(MODEL):	C
电压(VOLTAGE):	24V
工作宽度(WORKING WIDTH):	530mm
工作效率(WORKING MOTOR):	2700m <sup>2</sup> /h
洗地刷马达(BRUSH MOTOR):	550w
吸水马达(SUCTION MOTOR):	460w
吸水扒宽度(SQUEEGEE WIDTH):	730mm
洗地刷直径(BRUSH DIAMETER):	530mm
清水箱容量(SOLUTION TANK CAPACITY):	65L
污水箱容量(RECOVERY TANK CAPACITY):	75L
噪音(NOISE):	68dB
长宽高(DIMENSION):	1600x950x1400mm
重量(WEIGHT):	220kg

技术参数

型号(MODEL):	D
电压(VOLTAGE):	24V
工作宽度(WORKING WIDTH):	850mm
工作效率(WORKING MOTOR):	5550m <sup>2</sup> /h
洗地刷马达(BRUSH MOTOR):	2x450w
吸水马达(SUCTION MOTOR):	650w
吸水扒宽度(SQUEEGEE WIDTH):	1150mm
洗地刷直径(BRUSH DIAMETER):	2x430mm
清水箱容量(SOLUTION TANK CAPACITY):	110L
污水箱容量(RECOVERY TANK CAPACITY):	115L
噪音(NOISE):	70dB
长宽高(DIMENSION):	1600x950x1400mm
重量(WEIGHT):	335kg

26 | 27

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

### ASL V7500 吸尘器

ASL V7500 Industrial Vacuum Cleaner



### ASL V4000 吸尘器

ASL V4000 Industrial Vacuum Cleaner



#### 技术参数

型号(MODEL):	V7500
电压(VOLTAGE):	380-440V
电流(CURRENT):	17A
功率(POWER):	10HP(7.5KW)
吸力(MAX.VACUUM):	300mbar
风量(MAX.AIRFLOW):	700m³/h
吸尘口径(HOSE):	100mm
噪音(NOISE):	75dB
长宽高(DIMENSION):	1200x700x1350mm
重量(WEIGHT):	214KG

#### 技术参数

型号(MODEL):	V4000A	V4000B
电压(VOLTAGE):	380-440V	220-240V
电流(CURRENT):	10A	15A
功率(POWER):	5.5HP	5.5HP(4KW)
吸力(MAX.VACUUM):	300mbar	300mbar
风量(MAX.AIRFLOW):	380m³/h	380m³/h
吸尘口径(HOSE):	50/60 mm	50/60mm
噪音(NOISE):	75dB	75dB
长宽高(DIMENSION):	1050x630x1500mm	1050x630x1500mm
重量(WEIGHT):	135KG	135KG

28 | 29

产品篇  
SHANGHAI  
Qiheng Machinery Co., Ltd.

**ASL V3600 吸尘器**  
3600W Industrial Vacuum Cleaner



**ASL T21 抛光机**  
Stone Polishing Machine



T21抛光机  
Stone Polishing Machine



毛刷尘推  
Heavy-duty Push Broom

技术参数

型号(MODEL):	V3600
电压(VOLTAGE):	220-240V
电流(CURRENT):	8.8A
功率(POWER):	4.8HP(1200Wx3)
吸力(MAX. VACUUM):	300mbar
风量(MAX. AIRFLOW):	330m³/h
吸尘口径(HOSE):	50/60mm
噪音(NOISE):	75dB
长宽高(DIMENSION):	980x630x1780mm
重量(WEIGHT):	71KG

技术参数

型号(MODEL):	T21
电压(VOLTAGE):	220-240V
功率(POWER):	2.5HP
转速(DISC SPEED):	175rpm
磨盘(DISC DIAMETER):	431mm
线长(WIRE LENGTH):	10m
长宽高(DIMENSION):	630x580x1600mm
重量(WEIGHT):	54KG

# 30 | 31

辅料篇

SHANGHAI

Qiheng Machinery Co., Ltd.

## 研磨机特殊配件

Option Parts for ASL Machine

### 电机罩子 Motor cover



增加LED照明和喷水功能，是选配件，需增加额外费用。 Nice looking cover with LED light and water-spray function. It could help to work at dark enviroment and spray water to cool down the diamond tools and resin pads. It's an option parts for the below machine.

1号 适用T9, T1B, RT1  
2号 适用T1A, T7, T8  
3号 适用T6, T7A

NO.1 is suitable for T9, T1B, RT1.  
NO.2 is suitable for T1A, T7, T8.  
NO.3 is suitable for T6, T7A.

## 研磨抛光材料

New-Tech. Abrasives

### 混凝土水磨片 3 Steps Resin Pads (3",Wet)



用途: 适用于混凝土和石材地面的研磨处理，选用不同粒度可满足粗磨、细磨。  
Purposes: Applied to smooth the concrete floor and make the floor shining. 3 steps to save time and cost.It only do wet.

规格: 1#, 2#, 3#  
Grit: 1#, 2#, 3#

### 混凝土干磨片 5 Steps Resin Pads (3",Dry)



用途: 适用于混凝土和石材地面的研磨处理，选用不同粒度可满足粗磨、细磨。  
Purposes: Applied to smooth the concrete floor and make the floor shining. 5 steps to save time and cost. New technology make the pads last longer and geat polishing effect. It only do dry.

规格: 1#, 2#, 3#, 4#, 5#  
Grit: 1#, 2#, 3#, 4#, 5#

## 研磨抛光材料

Metal and Resin Abrasives

### 混凝土干磨片 (NO.025) 3" Flower Resin Pads (Dry)



用途: 适用于混凝土和石材地面的研磨处理，选用不同粒度可满足粗磨、细磨。  
Purposes: Applied to smooth the concrete floor and make the floor shining. 7 steps for different polishing purpose, i.e. Coarse polishing and fine polishing. It only do dry.

规格: 50#, 100#, 200#, 400#, 800#, 1500#, 3000#  
Grit: 50#, 100#, 200#, 400#, 800#, 1500#, 3000#

### 混凝土干磨片 Cyclone Polishing Buff (Dry)



用途: 适用于混凝土、环氧磨石、水泥基磨石、自流平水泥  
Purposes: Applied for concrete, epoxy-base Terrazzo, cement-base Terrazzo, self-leveling cement

规格: 50#, 100#, 200#, 400#, 800#, 1500#, 3000#  
Grit: 50#, 100#, 200#, 400#, 800#, 1500#, 3000#

32 | 33

辅料篇

SHANGHAI

Qiheng Machinery Co., Ltd.

## 研磨抛光材料

Metal and Resin Abrasives

### 混凝土干磨片 Polishing Buff (Dry)



685mm (27寸)

用途: 适用于混凝土、环氧磨石、水泥基磨石、自流平水泥。

Purposes: Applied for concrete, epoxy-base Terrazzo, cement-base Terrazzo, self-leveling cement.

规格: 1#, 2#, 3#

Grit: 1#, 2#, 3#

### 金刚石刀头 (No.034) Diamond Tools



用途: 适用于混凝土和石材地面的研磨处理, 耐用性高、锋利度强、可用于干、湿两种研磨方式。

Purposes: Applied to flat the concrete floor and do the coarse grinding of concrete and stones. It is high performance and good quality products with long-life. It could do wet and dry.

规格: 30#, 80#, 150# (165#)

Grit: 30#, 80#, 150# (165#)

种类: 锋利型, 普通型, 耐磨型

Types: Agresive Type, Standard Type, Long-life Type

### PCD-1



用途: 主要用于去除地坪表面的附着物, 适用于环氧地坪切割。

Purposes: Applied to remove the hard-to-grind flooring materials, i.e. Epoxy.

## 研磨抛光材料

Metal and Resin Abrasives



### 混凝土增硬剂 (801) Concrete Hardener (Lithium)

用途: 适用于各类混凝土、水磨石地面、耐磨地面, 提高水泥硬度, 可阻止表面粉化起尘。

Purposes: Applied to Concrete, Terrazzo and Wear-resistance floor after mixing with water 1:1. It is to increase the hardness of various floors.



### 混凝土亮光剂 (802) Concrete Polishing Solution

用途: 适用于各类混凝土、水磨石地面、耐磨地面, 提高表面光泽度, 提高抗污染和防起尘。

Purposes: Applied to Concrete, Terrazzo and Wear-resistance floor after mixing with water 1:1. It is to improve the surface gloss, abrasion resistance and dustproof degree.



### 混凝土密封剂 (803) Concrete Sealant

用途: 适用于各类混凝土、水磨石地面、耐磨地面, 提高表面光泽度, 提高抗污染和防起尘。

Purposes: Applied to Concrete, Terrazzo and Wear-resistance floor. It is to improve the surface gloss, abrasion resistance and dustproof degree.



### ASL 修补液 ASL Repair Agent

用途: 适用于有细小孔洞和缝隙的各种混凝土、水泥基地面。填补缝隙, 增加平整度和美观性。

Purposes: Applied to fill holes and cracks in various concrete and cement-base surface to increase the flatness and gloss of the floor.



### ASL 抛光液 (601) ASL Polishing Cream

用途: 适用于各种高面: 花岗石、抛光砖、石英石地面表面磨损失去光泽或翻新后, 提高光泽度。

Purposes: Applied to Stones, i.e. Granite, Marble, Tiles, Quartz Stone, etc. It is to increase the surface gloss after the stone floor became darkness and no shining anymore.