




**PLATINUM
SMART-HEAT™ ELECTRIC
MARINE**


AISI 316 MARINE-GRADE STAINLESS STEEL • LLOYD'S REGISTER CERTIFIED

PLATINUM SMART-HEAT™ ELECTRIC MARINE

Made in high-quality, AISI316-grade stainless-steel, our Platinum Smart-Heat™ Electric Marine heaters were specifically engineered to provide superior resistance to the corrosive elements of marine environments. Available in a white or black finish with a variety of mounting options including wall, ceiling, and recessed.

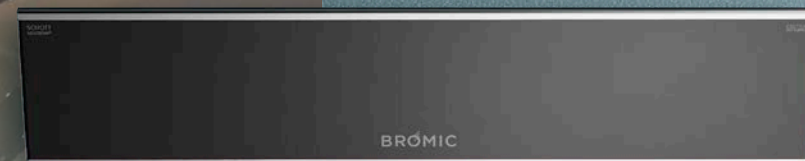

2300W, 3400W & 4500W SERIES
BLACK | WHITE

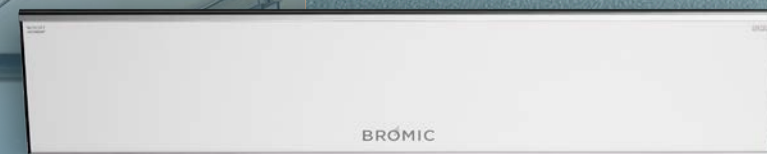

2300W, 3400W & 4500W SERIES
BLACK | WHITE

WHY PLATINUM MARINE?

To counteract the hurdles of installing an outdoor heater aboard a superyacht or cruise ship where standard stainless steel can rust and deteriorate, Bromic engineered the Platinum Electric Marine heater series.

AISI 316 MARINE-GRADE STAINLESS STEEL

Built to withstand corrosive environments with high grade materials and a fully enclosed heater body to protect internal elements.

CONVENIENT CONTROL OPTIONS

For ease of use.

VERSATILE MOUNTING OPTIONS

Wall, ceiling and recessed mounting options.




WHAT ARE CORROSIVE ELEMENTS?

The high level of relative humidity in marine environments can add to the deterioration of metals, accelerating the electrochemical reactions that cause rusting and other forms of corrosion. Some of the major threats include those made primarily of sodium chloride such as salt spray from breaking waves and onshore winds, or other atmospheric pollutants like sulfur dioxide within fog, mist and dew.




LLOYD'S REGISTER CERTIFIED

The first outdoor heating solution to receive approval on recessed applications from the organization.

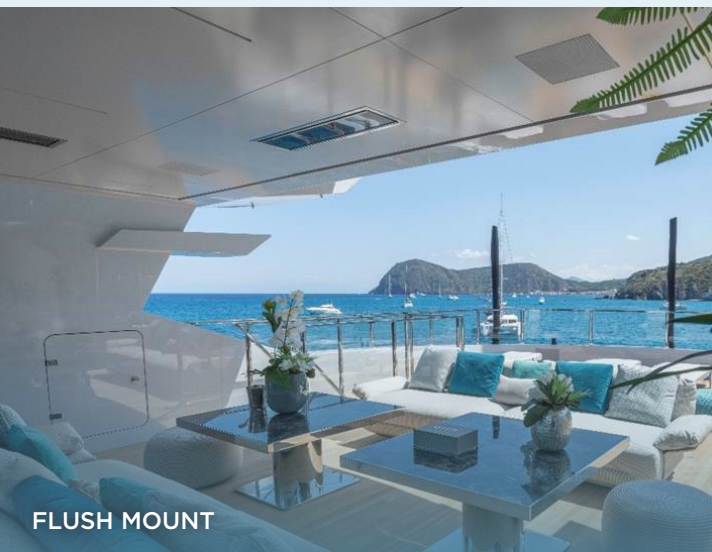

FLUSH MOUNT

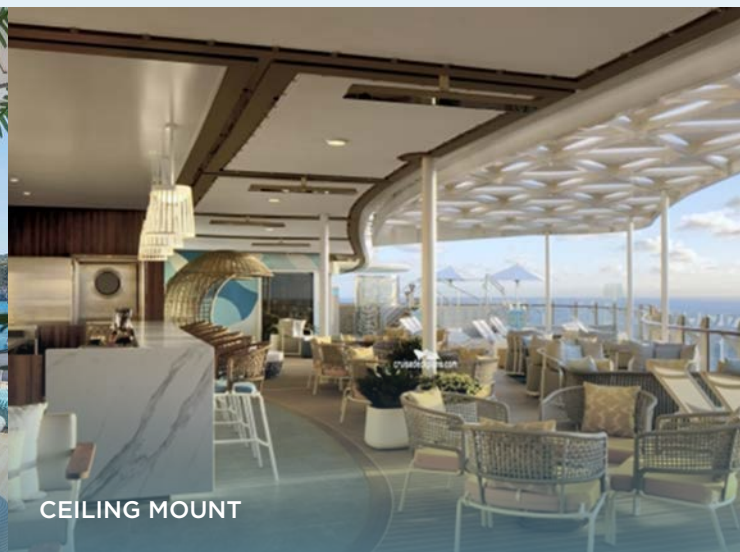

CEILING MOUNT



WALL MOUNT

SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

MODEL NUMBER	2300W SERIES	3400W SERIES	4500W SERIES
PRODUCT CODES PLATINUM ELECTRIC MARINE	BH0320011 BH0320013	BH0320012 BH0320014	BH3622002 BH3622003
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC
COLOUR	BLACK WHITE	BLACK WHITE	BLACK WHITE
HEAT AREA	6M ²	10M ²	12M ²
RATED CURRENT	220 - 240V/9.6A	220 - 240V/14.2A	220 - 240V/18.8A
MINIMUM FLOOR CLEARANCE	WALL 1800MM CEILING 2400MM	WALL 1800MM CEILING 2400MM	WALL 1800MM CEILING 2400MM
MOUNTING OPTIONS			
CEILING MOUNT	INCLUDED	INCLUDED	INCLUDED
WALL MOUNT	INCLUDED	INCLUDED	INCLUDED
RECESS KIT FLUSH MOUNT	✓	✓	✓
CEILING RECESS KIT MARINE PRODUCT CODES	BH3130032	BH3130027	BH3623001
CEILING POLE EXTENSION	✓	✓	✓
CEILING POLE (600MM) MARINE PRODUCT CODES	BH3130056	BH3130056	BH3623022
CEILING POLE (1200MM) MARINE PRODUCT CODES	BH3130057	BH3130057	BH3623023
FREESTANDING	-	-	-
CONTROL OPTIONS			
ON OFF	✓	✓	✓
ON OFF PRODUCT CODE	BH3130019-2	BH3130019-2	BH3130019-2
DIMMER	✓	✓	✓
DIMMER PRODUCT CODE	BH3130020-3	BH3130020-3	BH3130020-3
MASTER REMOTE *	✓	✓	✓
MASTER REMOTE PRODUCT CODE	BH3130021-2	BH3130021-2	BH3130021-2

* Control up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer control required. Works with dimming controllers. Remote control operates within 100ft of heaters.

** Available in 208V and 220-240V configurations.

Measurements displayed within this document are for reference only, for complete requirements see the installation/user manual. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in inches.

EXTEND YOUR COMFORT
OUTDOORS WITH THE SUPERIOR
HEAT AND AWARD-WINNING
DESIGN OF OUR SMART-HEAT™
OUTDOOR HEATERS.




DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

PROFILE


2300W



3400W




4500W




CEILING RECESS


CEILING RECESS FRAME 2300W




CEILING RECESS FRAME 3400W

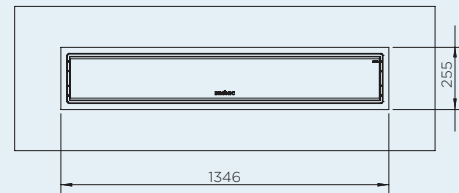


CEILING RECESS FRAME 4500W

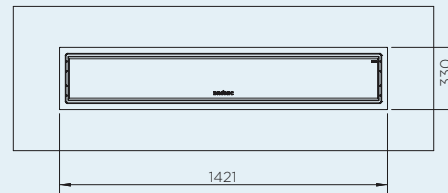





MINIMUM CAVITY OPTION 1
2300/3400W

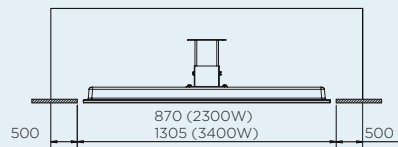

MINIMUM CAVITY OPTION 2
2300/3400W

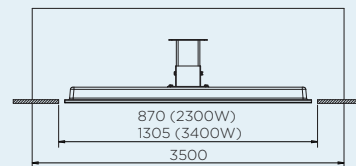


MINIMUM CAVITY FOR 4500W

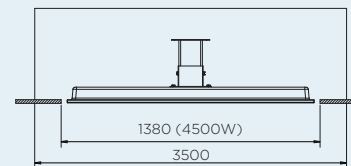


HEATING REACH

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.


2300W SERIES
HEATING APPROXIMATELY 6M²
2300W HEATING POWER

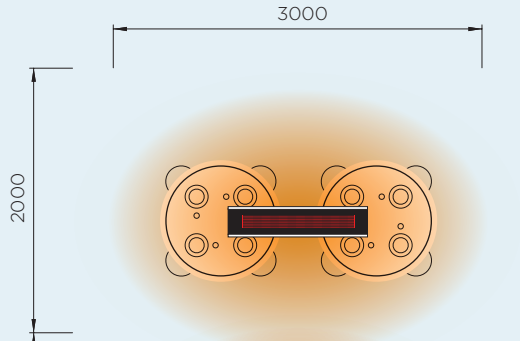

3400W SERIES
HEATING APPROXIMATELY 10M²
3400W HEATING POWER

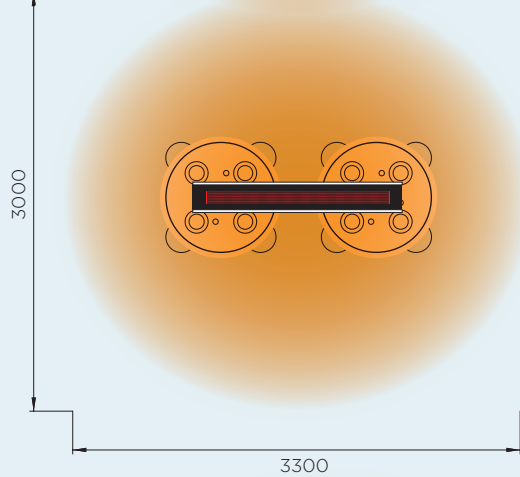

4500W PLATINUM
HEATING APPROXIMATELY 12M²
4500W HEATING POWER

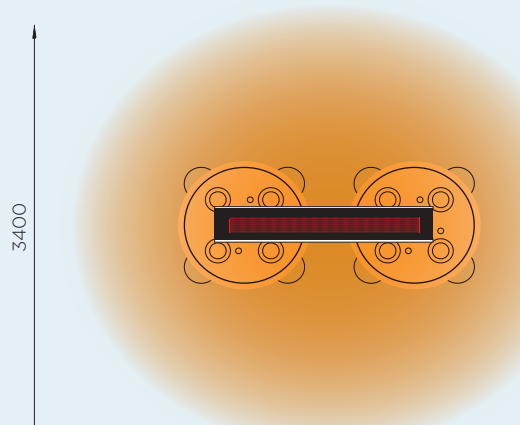


VERSATILE MOUNTING SOLUTION

Ability to wall-mount, ceiling-mount, or recess using either the Standard or Low Clearance Recess Kit.

HIGH PERFORMANCE STAINLESS-STEEL CONSTRUCTION

Premium 316 grade stainless-steel suitable for marine environments.

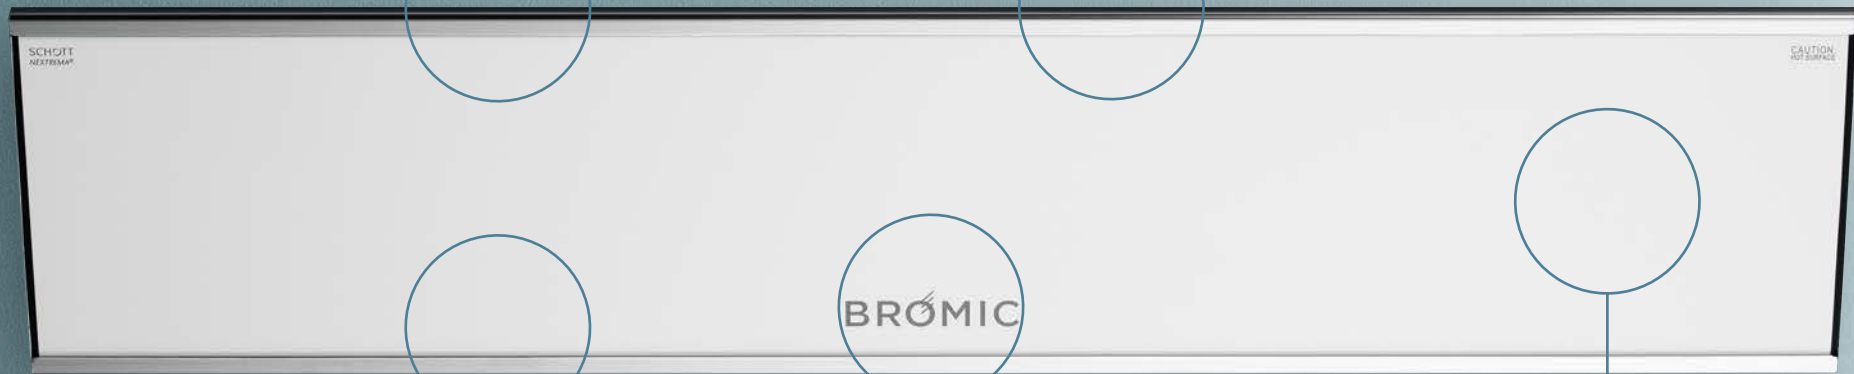

CLEAN, COMPACT AND ELEGANT DESIGN

Minimized light emissions and easy to clean in a black or white finish.

DURABILITY YOU CAN TRUST

Backed by a 2-year warranty.

SEALED ELEMENT

Sealed compartment with thin film elements to prevent corrosion.



COMPATIBLE WITH
SMART-WIRELESS
TECHNOLOGY



BROMIC
HEATING

BROMIC.COM

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.